

Electric strikes from effeff



Electric Strike Model Series 118
Standard and fire-rated electric strikes


ASSA ABLOY

Experience a safer
and more open world



About us.

Whatever you want to secure, protect, maintain –
we have technology you require.


ASSA ABLOY



Arsenal Stadium, London

Breaking new grounds, implementing new technologies, developing new ideas. Founded in 1936, the company effeff based in Albstadt became the market leader in the field of door control systems by following a consistent strategy. After starting the electric strike production in 1947, a comprehensive product range has been gradually developed, which enables effeff to offer suitable solutions for every door.

February 1st, 2000, effeff joined the ASSA ALBOY Group based in Stockholm, Sweden and merged at the beginning of 2005 with IKON GmbH Präzisionstechnik, Berlin who also belong to the group to become ASSA ABLOY Sicherheitstechnik GmbH.



Court of Justice, Antwerpen

IKON and effeff, both renowned and well-established brands within the market remain under ASSA ABLOY Sicherheitstechnik GmbH as do the production sites of Berlin and Albstadt and a sales office in Ratingen.

ASSA ABLOY is the leading manufacturer and supplier of mechanical and electro-mechanical locks and related products worldwide. Our customers benefit from the extensive know-how of the largest international group of companies, meeting every requirement in terms of total security and comfort throughout the world.



Emirates Towers, Dubai



Airport Zurich

We assist you with words and deeds

The experts at ASSA ABLOY Sicherheitstechnik would be pleased to advise you which electric strike model is most suitable for which installation position.

Hotline Technical advice

+49 7431 123-381

Hotline Sales/order processing

+49 7431 123-700

Technical advice

In the matter of technical advice, with us you will be supported by professionals who will continue to help you on every question on technical details. Of course you can also be put into contact with specialists for questions of detail in the matter of technical risk assessment or key accounts.

Sales advice/order processing

With our commercial customer services you can deal with all questions to do with your purchase order, for example the status of the order processing, the delivery date, purchase order changes, but also returns or guarantee issues. Use this simple and quick option to get information or help from our specialists. We will do that with pleasure.

Trade fairs

You will find effeff at many national and international trade fairs. You can obtain the exact dates from our website www.assaabloy.de

Our product catalogue online at www.effeff.com



Fast and up-to-date comprehensive product information at any time

1 Clearly arranged layout according to our different product areas...

2 the submenu will help you navigate through our database...

3 to find the model you need.

4 By just clicking on the article, you can generate a detailed specification sheet.

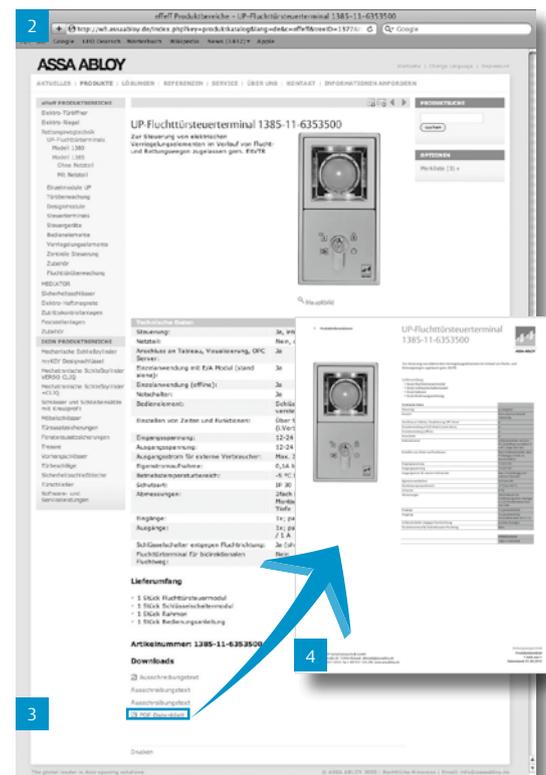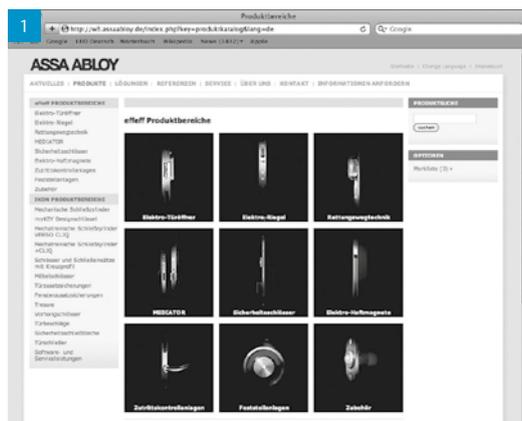

About us	2 – 3
Service, support and Internet	4
Model Range 118 for standard applications	
Model 118, fail-locked	8 – 26
Model 128, hold-open function	27 – 29
Model 138, fail-unlocked	30 – 33
Model 118 ProFix® 2, fail-locked	34 – 43
Model 128 ProFix® 2, hold-open function	44 – 45
Model 138 ProFix® 2, fail-unlocked	46 – 48
Model 148, hold-open function, without pin	49 – 50
Model 148 ProFix®, hold-open function, without pin	51 – 52
List of order codes	53 – 54
Model Range 118F for fire rated doors	
Model 118F, fail-locked	65 – 57
Model 118F ProFix® 2, fail-locked	58 – 61
List of order codes	62
Versions and special solutions for Model Range 118 and 118F	63
Strike plates	
General information	65
Angled Strike Plates ProFix® 2	66 – 70
Flat strike plates, Flat Strike Plates ProFix® 2	71 – 80
Short Flat Strike Plates ProFix® 2	81 – 84
Flanged Strike Plates ProFix® 2	85 – 94
U-shaped strike plate	95
Accessories	
Dummy components	97 – 100
Connecting cable, plug-in connecting cable, intermediate piece	101
Pre-Load Electronic Assembly 760-12	101
Surface-mounted attachments for Model 118	102
Automatic Door Control Unit Model 750	103
Switchover Device Model 7410-10	104
Control unit, relay, switchover device	105
Power supply units	106
Monitoring contacts	107 – 109
General information	
Fail-locked, fail-unlocked and hold-open modes of operation	111
Determination of DIN swing direction	112
Power-on time and switch-on current	113
Explanation of x measurement	114
Description of ProFix®	115
Classification key as per DIN EN 14846 and DIN EN 179	116
Certificates	117
Maintenance and care instructions	118
FAQs	119 - 121
Fax order form	122

effeff Model Range

118 and 118F

A single design, many possible applications, highly versatile

Tested in the factory in compliance with DIN EN 14846:2008-11

Standard applications (Series 118, 128, 138, 148)
Standard electric strikes are used wherever a closed door needs to be combined with convenience which have no smoke or fire safety requirements.

Typical areas of use are:

- Front doors in single houses
- Main entrances to apartment buildings
- Doors in buildings which have no fire safety or smoke requirements
- Entrance doors to office and business premises, such as doctor's and or lawyer
- Additional locking systems and interlock systems with Fail-Unlocked Electric Strike Model 138
- We recommend Model Range 16W for outdoor areas

effeff offers you an electric strike model range in the Standard Electric Strike segment which will meet your individual requirements.

Fire safety (Series 118F)

Fire-rated electric strikes are designed for use in fire doors. Such doors are subject to particularly stringent requirements as are the electric strikes in Model Range 118 ('F' stands for 'fire').

Typical areas of use are:

- Fire doors in commercial and public buildings, such as single- or two-leaf doors in hospitals, airports or government offices
- Multi-functional doors, in industrial buildings, for example
- Fire doors in places such as hotels and government agencies
- Heavy duty Door such as huge steel door

effeff offers you an electric strike model range in the Fire-Rated Electric Strike segment which will meet your individual requirements.



Plug-in connection.
effeff standard connection with new integrated plug-in option.

Electric strikes in Model range 118 all feature the same compact design and the same connection technology with a plug-in option.

A conventional connection using wires is still possible. The optional plug-in connection cable (see Accessories) makes connection easy and also reduces the time required for fitting even further.



Electric Strike Model 118
for standard applications

Fail-locked 118

Technical attributes

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)


Model with basic equipment.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable



Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

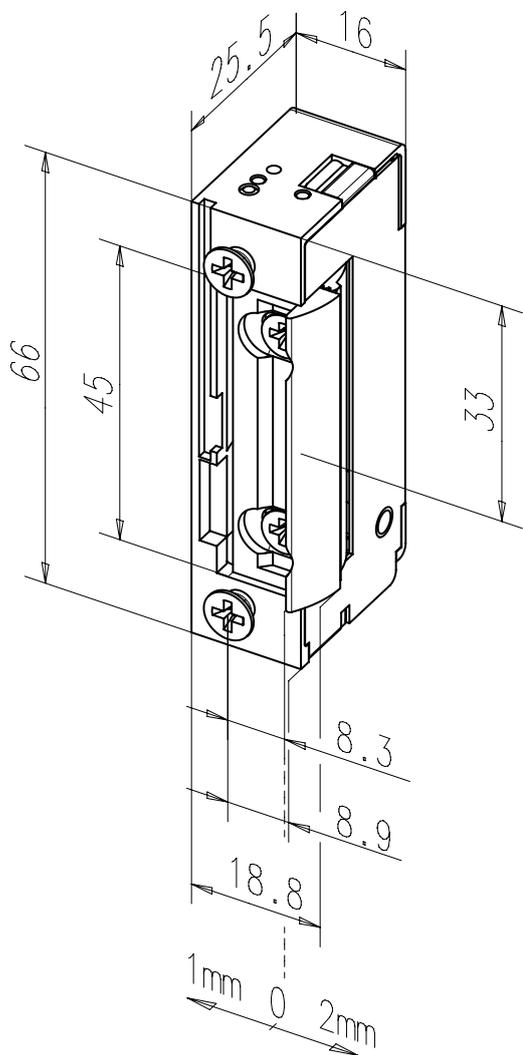

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No


DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118-----	* * 1

Fail-locked 118E

Technical attributes

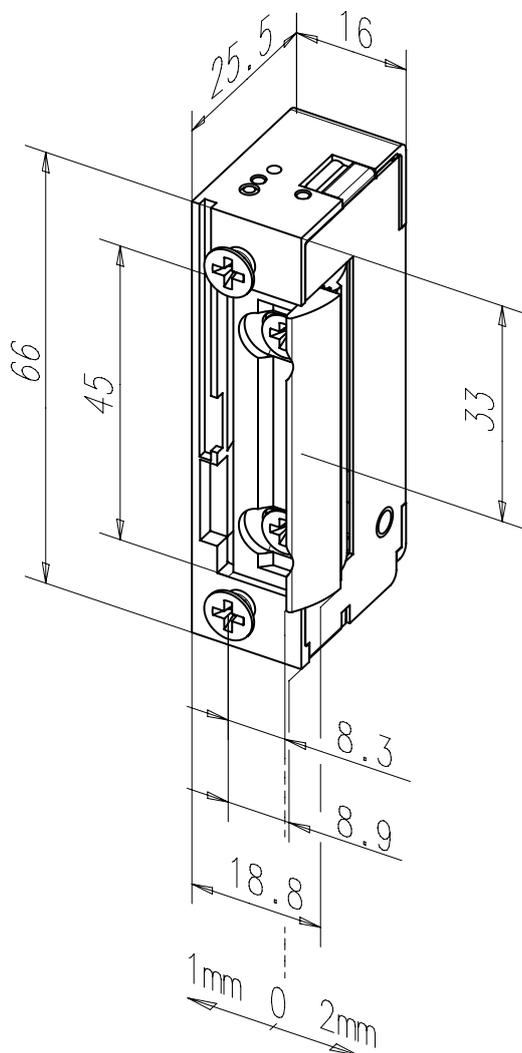

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with mechanical unlocking.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

118E----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118E130

Technical attributes




Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with mechanical unlocking system for the electric strike latch. Suitable for use with roller keep locks or latch bolt slides.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with striking plates with latch bolt slide
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

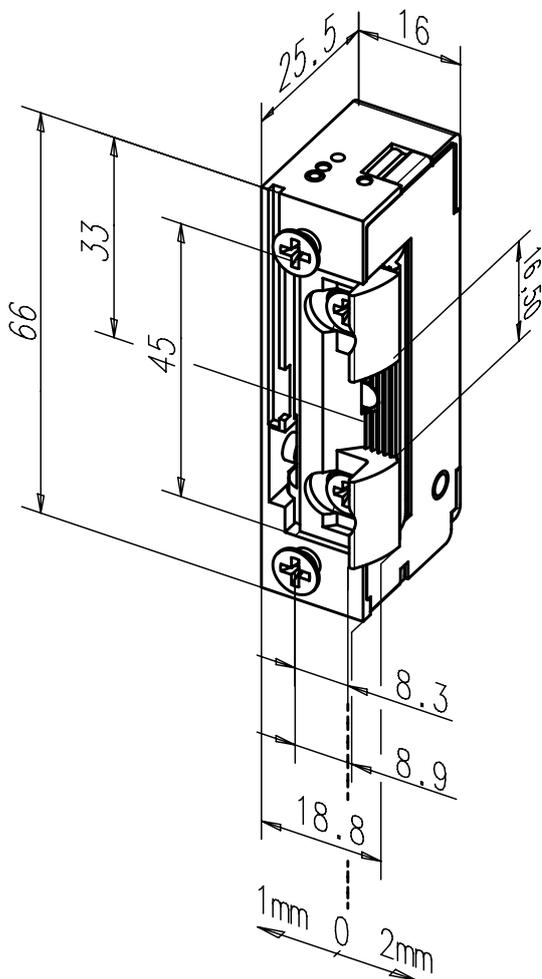

Characteristics	
For latch bolt slide	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No



DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118E130-----	** 1

Fail-locked 118E190

Technical attributes

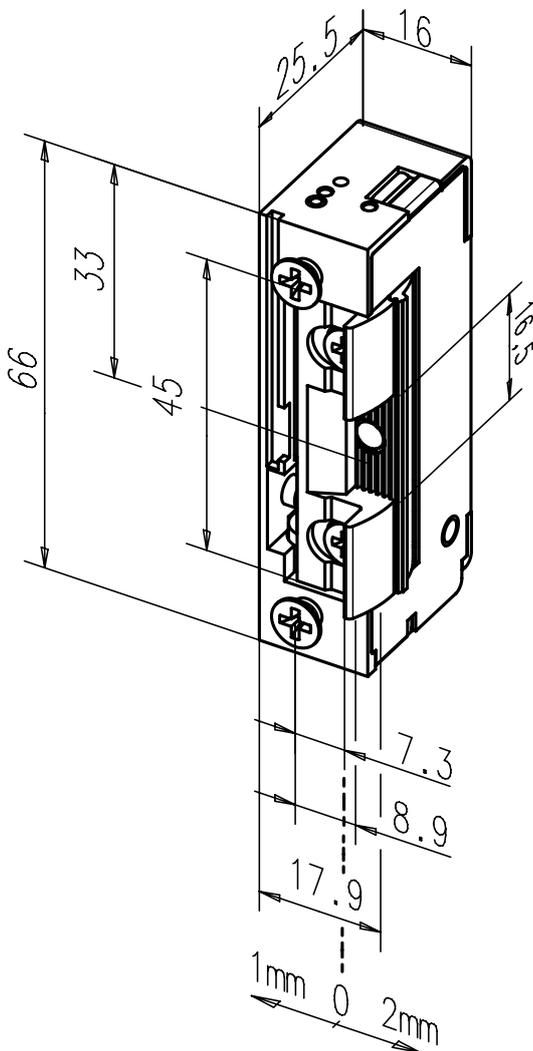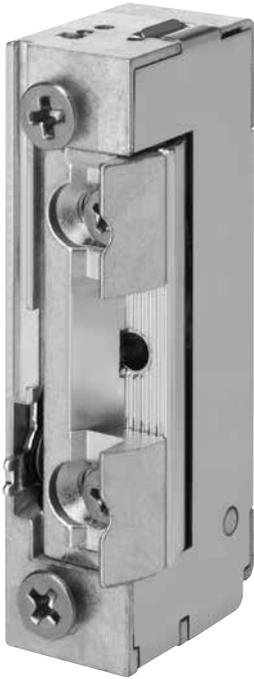

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with mechanical unlocking system for the electric strike latch. Suitable for use with roller keep locks or latch bolt slides.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Keeper made with brass
- Compatible with current mortise locks
- Compatible with striking plates with latch bolt slide
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

For latch bolt slide	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

118E190----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118RR

Technical attributes




Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

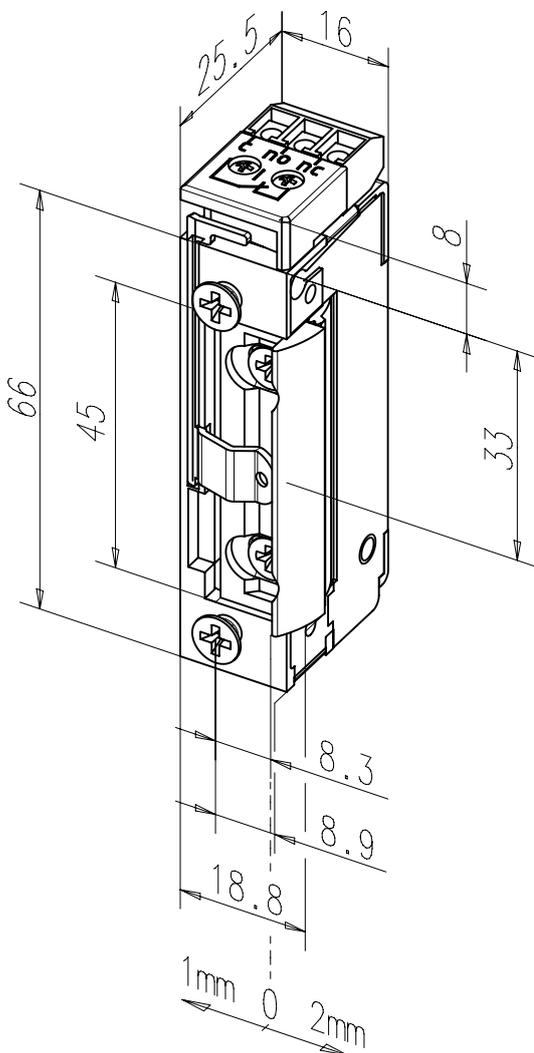

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	•
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions	
Universal	1


Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118RR-----	* * 1

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

Fail-locked 118RRE

Technical attributes

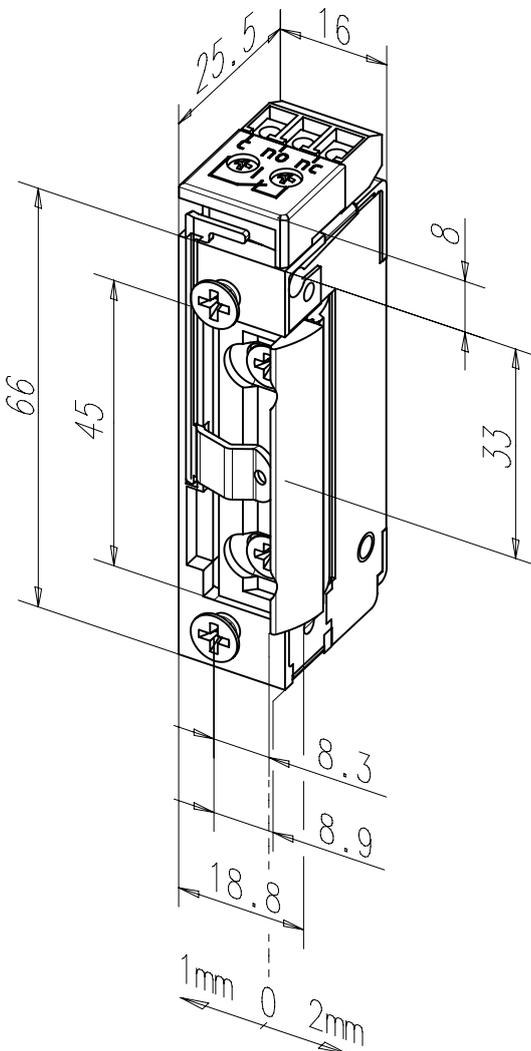

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt. The door strike latch in this model can also be unlocked mechanically.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	•
Mechanical unlocking (E)	•
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	•
Hold-open function	•

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118RRE-----	** 1

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

Fail-locked 11805

Technical attributes



Minimum fitting size - maximum effect


effeff Standard Electric Strike 118 with FaFix® (FF)

Model with bipolar protective diode for access control systems.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

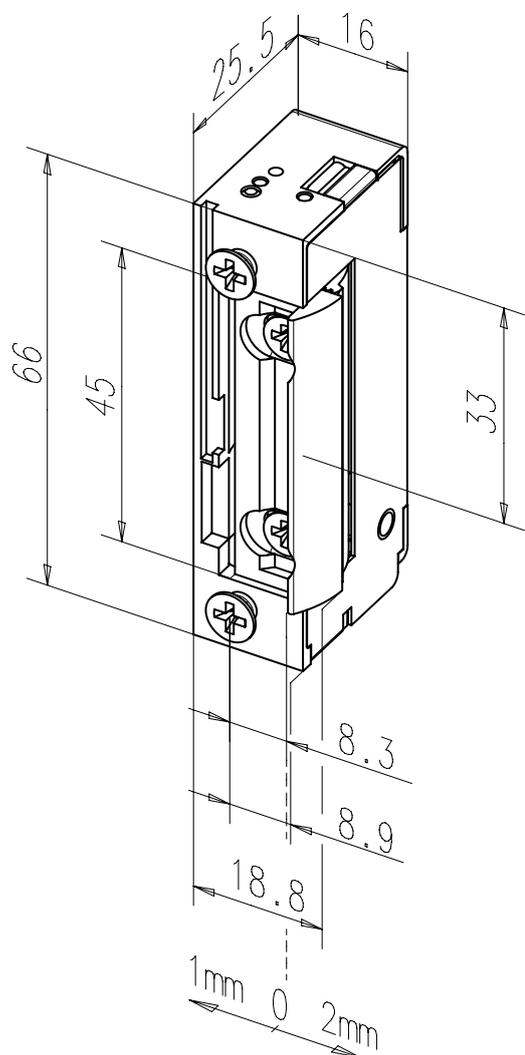

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.


11805----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 11805E

Technical attributes

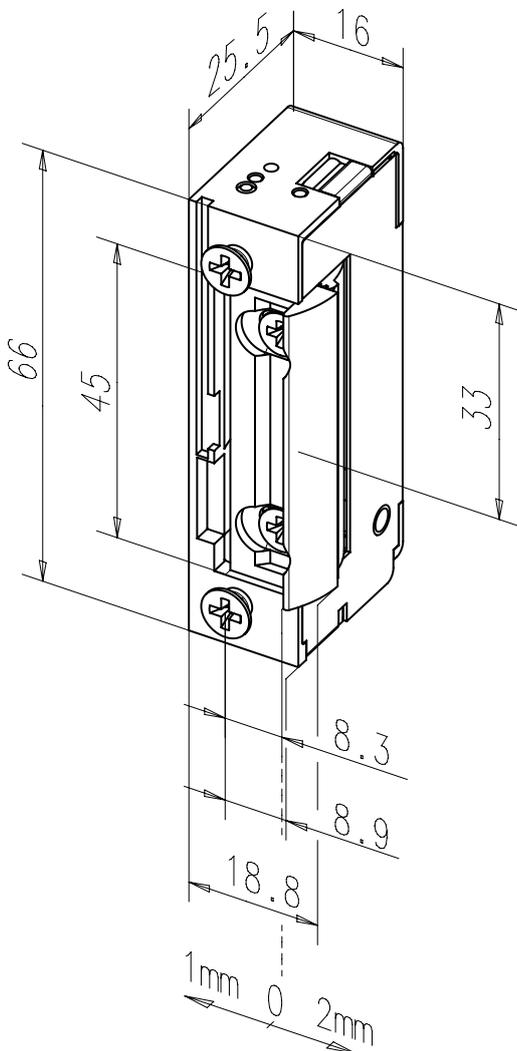

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with bipolar protective diode for access control systems and mechanical unlocking.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No


DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
11805E-----	** 1

Fail-locked 11805RR

Technical attributes

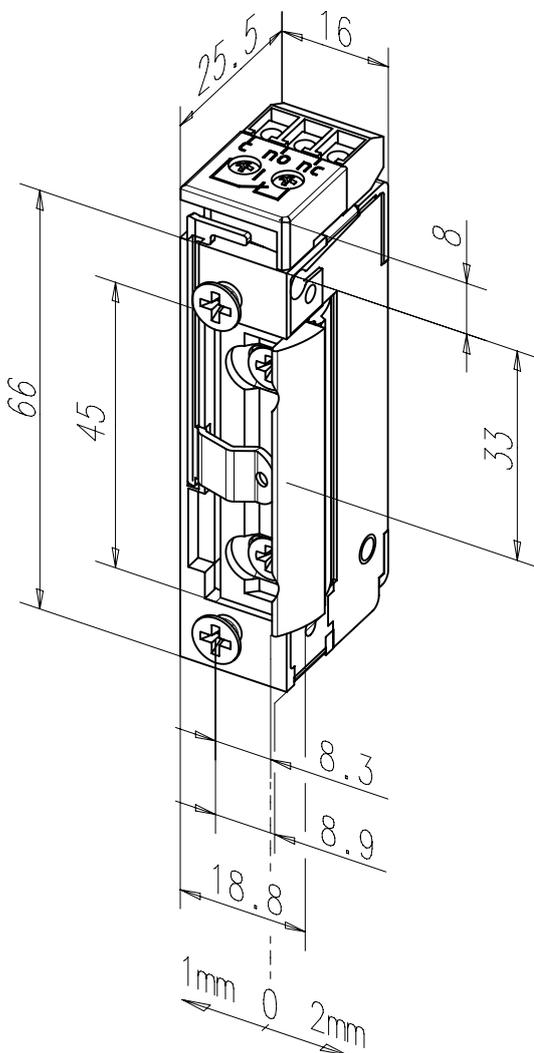

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with bipolar protective diode for access control systems. Monitoring contact as potential-free changeover contact, actuated by the latch bolt.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	•
Mechanical unlocking (E)	•
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	•
Hold-open function	•

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No


DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
11805RR-----	** 1

Fail-locked 118.500

Technical attributes

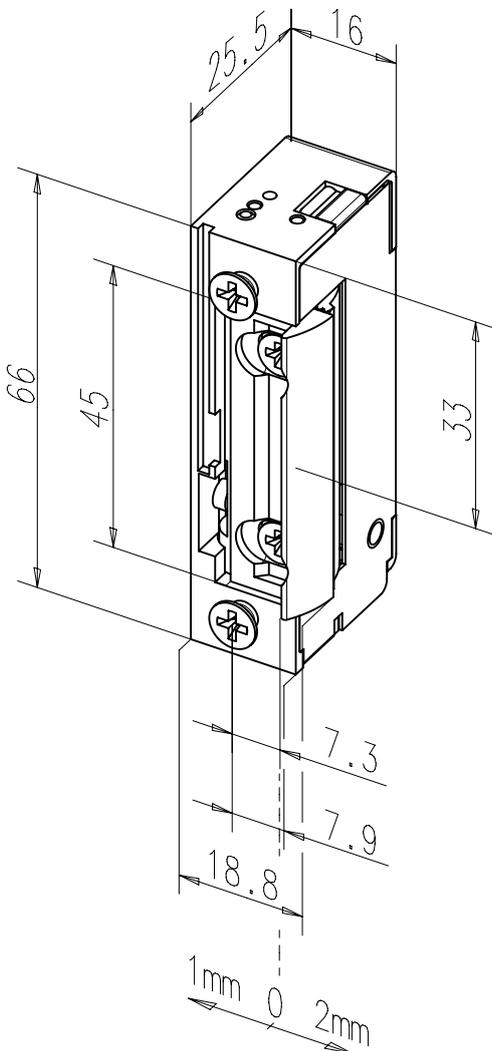

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with basic equipment and screw holes which are offset by 1 mm towards opening side.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Drill hole offset by 1 mm	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No


DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118.500-----	** 1

Fail-locked 118E500

Technical attributes

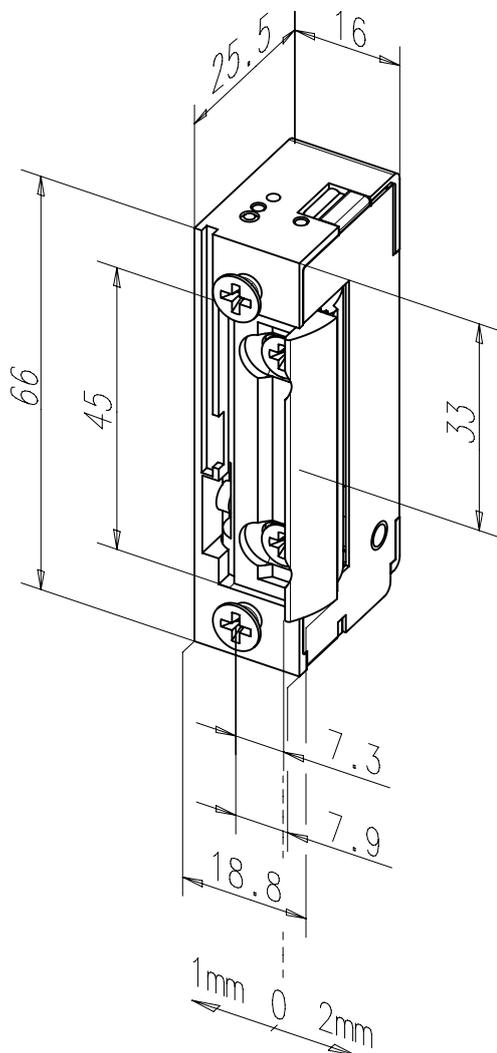

Minimum fitting size - maximum effect

effeff Standard Electric Strike 118 with FaFix® (FF)

Model with mechanical unlocking and screw holes offset by 1 mm towards opening side.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

Drill hole offset by 1 mm	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.


118E500----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118.504

Technical attributes

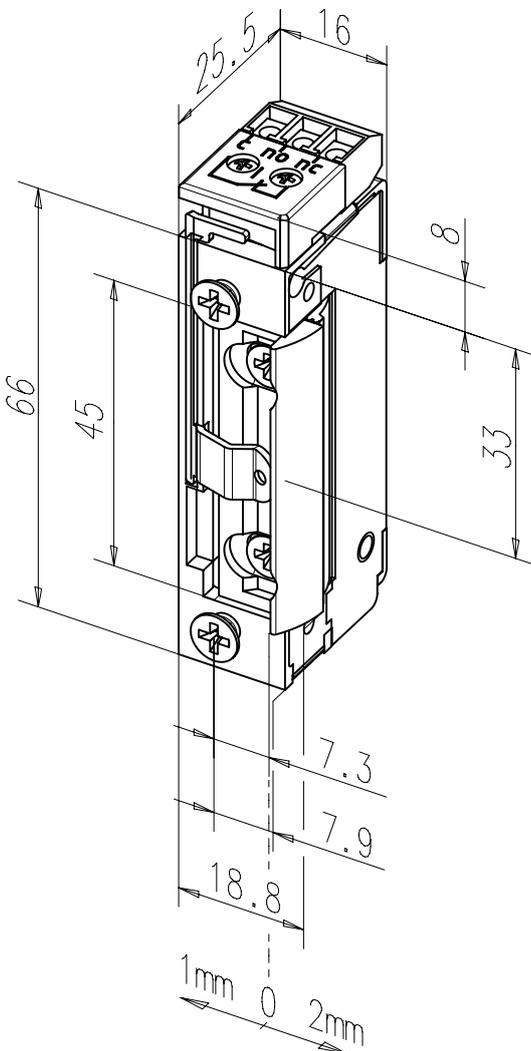

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with monitoring contact as potential-free changeover contact and screw holes which are offset by 1 mm towards opening side.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Drill hole offset by 1 mm	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	•
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	

DIN door swing directions	
Universal	1


Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118.504-----	** 1

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

Fail-locked 118.505

Technical attributes

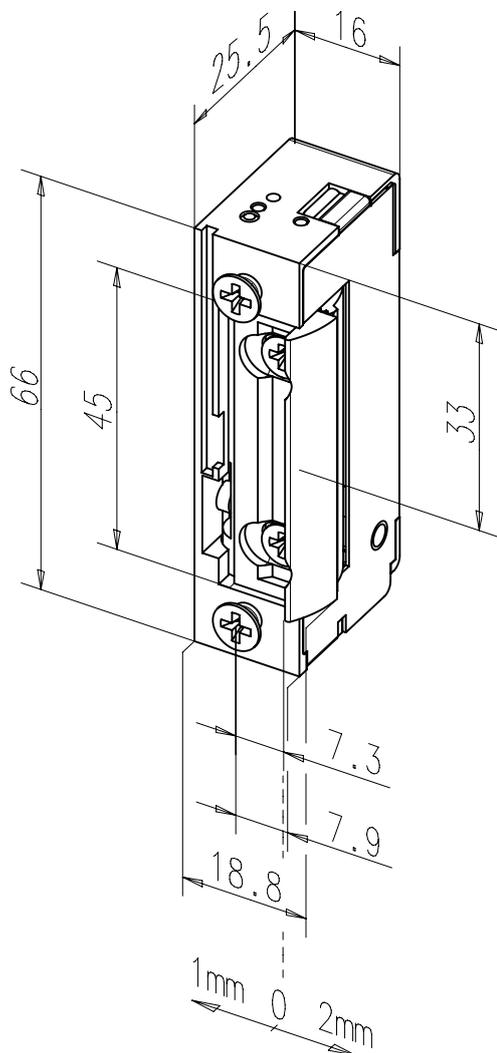

Minimum fitting size - maximum effect

effeff Standard Electric Strike 118 with FaFix® (FF)

Model with bipolar protective diode for access control systems and screw holes offset by 1 mm towards opening side.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

Drill hole offset by 1 mm	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	•
Fail-locked	•
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.


118.505----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118E505

Technical attributes

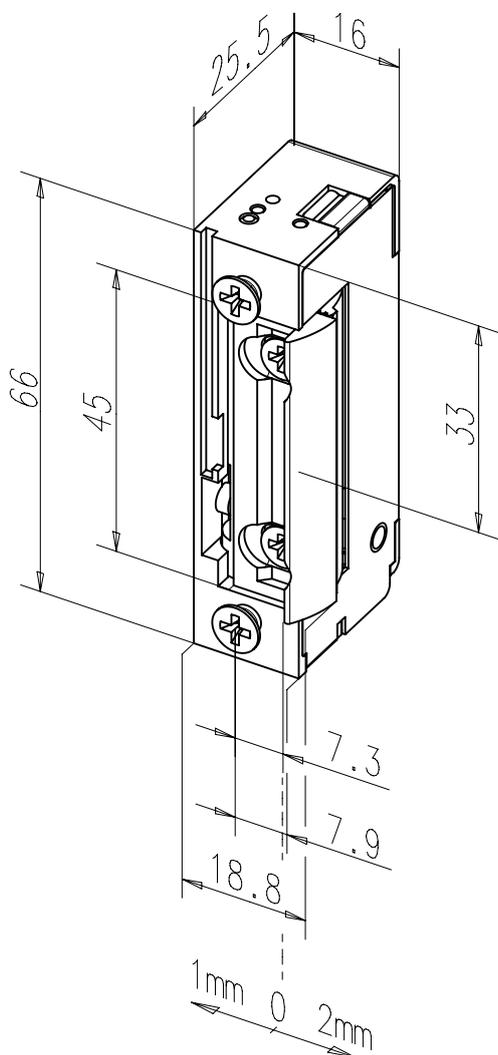

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with bipolar protective diode for access control systems, mechanical unlocking and screw holes offset by 1 mm towards opening side.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

- Drill hole offset by 1 mm
- Adjustable latch (FF, FaFix®)
- Adjustable electric strike (F, Fix)
- Monitoring contact (RR)
- Mechanical unlocking (E)
- Bi-directional diode
- Fail-locked
- Hold-open function

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions

Universal	1
-----------	---

Voltage


10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

118E505----- ** 1

Fail-locked 118.506

Technical attributes

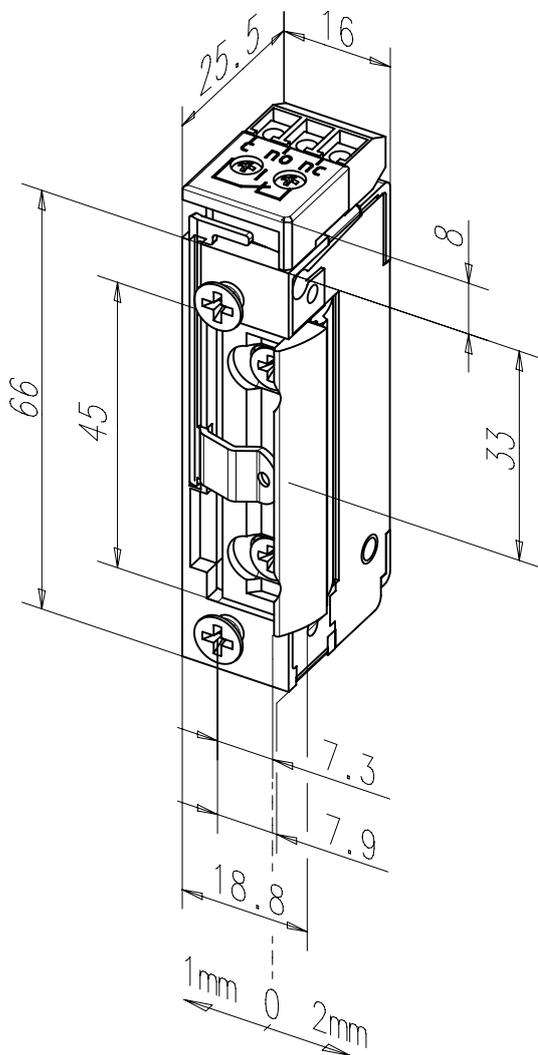

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with bipolar protective diode for access control systems. Monitoring contact as potential-free changeover contact and screw holes offset by 1 mm towards opening side.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Drill hole offset by 1 mm	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	•
Mechanical unlocking (E)	•
Bi-directional diode	•
Fail-locked	•
Hold-open function	•

DIN door swing directions	
Universal	1


Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118.506-----	* * 1

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

Fail-locked 118E530

Technical attributes

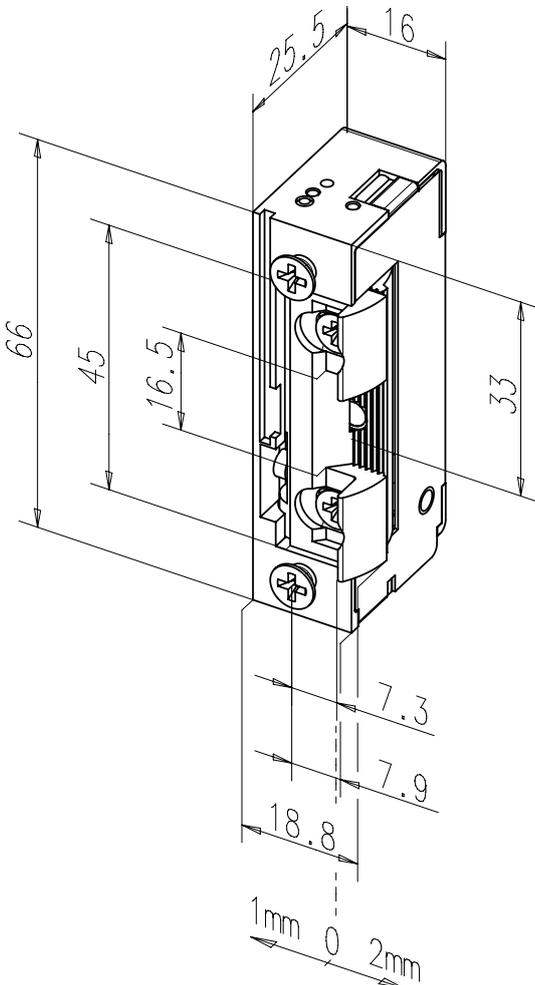

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with mechanical unlocking. Suitable for use with roller keep locks or latch slides. This model also features screw holes which are offset 1 mm towards opening side.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Plug-in connecting cable available
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

- Drill hole offset by 1 mm
- For latch bolt slide
- Adjustable latch (FF, FaFix®)
- Adjustable electric strike (F, Fix)
- Monitoring contact (RR)
- Mechanical unlocking (E)
- Bi-directional diode
- Fail-locked

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions

Universal	1
-----------	---

Voltage


10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

118E530----- ** 1

Fail-locked 118E340

Technical attributes

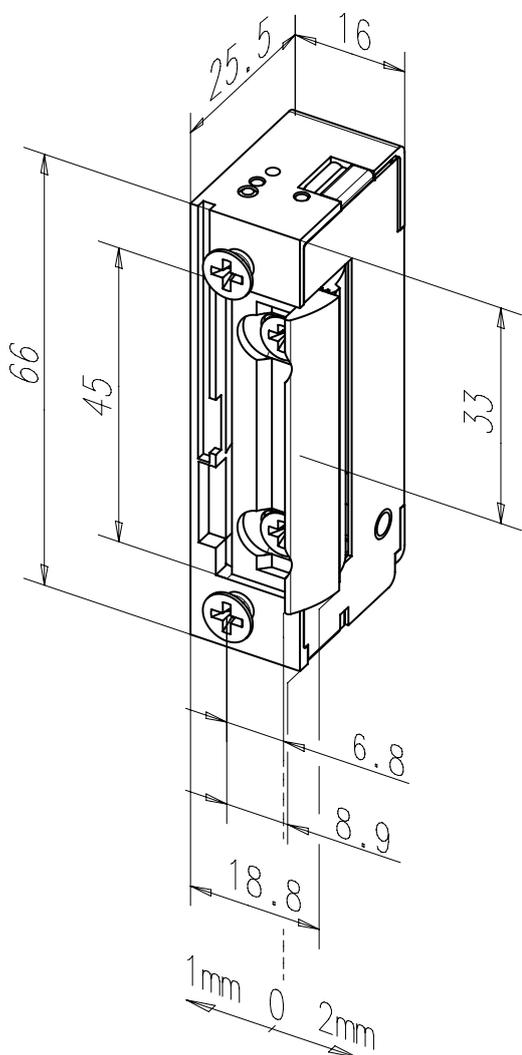

Minimum fitting size - maximum effect

effeff Standard Electric Strike 118 with FaFix® (FF)

Model with mechanical unlocking and FaFix® surface-mounted attachment 1.5 mm thick.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

118E340----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118K

Technical attributes




Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with connection cable, 2 x 0.5 x 2,500 mm.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

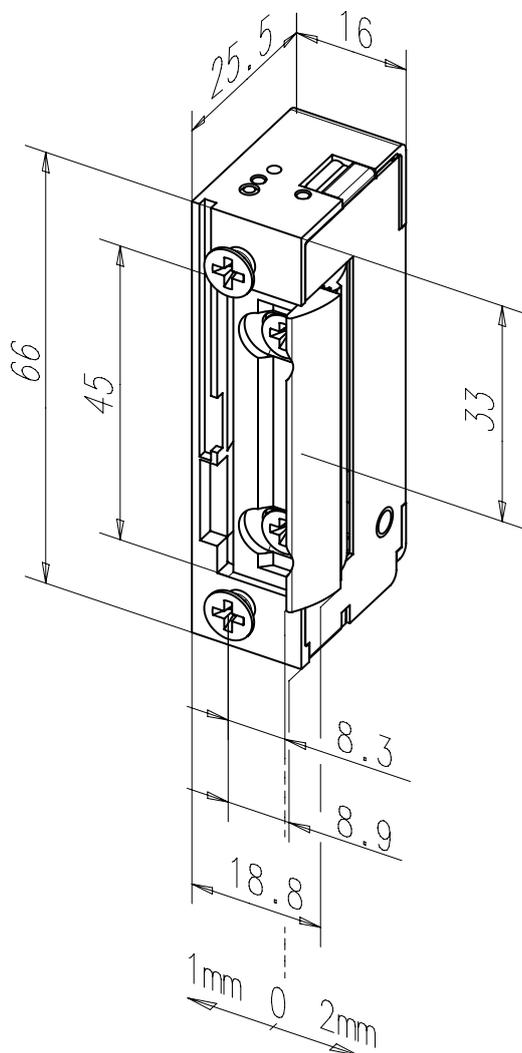

Characteristics	
Connecting cable	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118K-----	** 1

Fail-locked 118EK

Technical attributes




Minimum fitting size - maximum effect effeff Standard Electric Strike 118 with FaFix® (FF)

Model with mechanical unlocking and connection cable, 2 x 0.5 x 2,500 mm.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

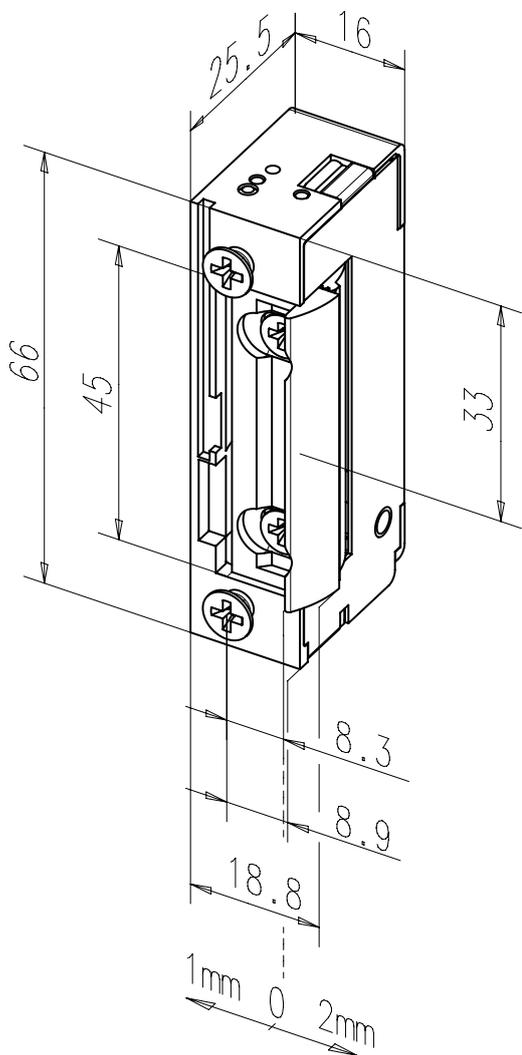

Characteristics	
Connecting cable	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118EK-----	* * 1

Hold-open function 128


Technical attributes

Minimum fitting size - maximum effect effeff Standard Electric Strike 128 with FaFix® (FF)

Model with basic equipment.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

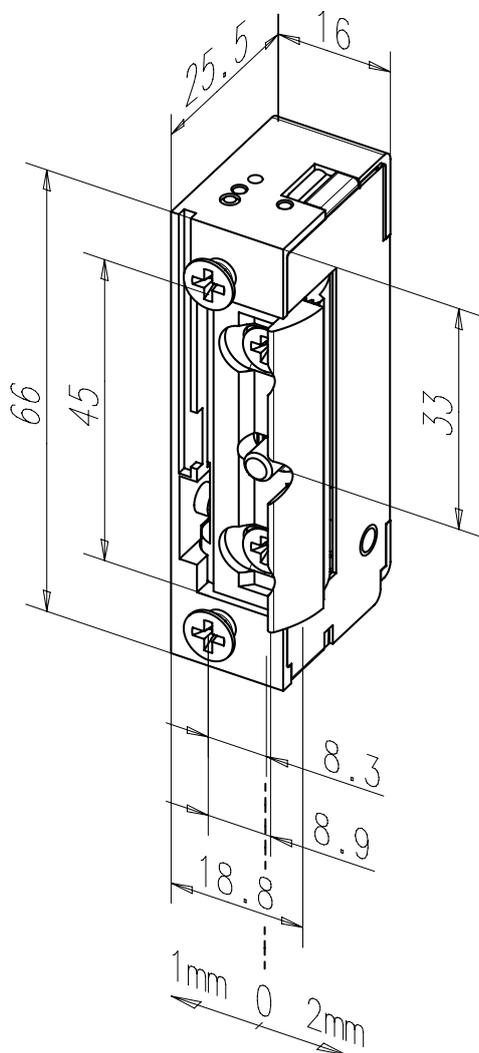

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

- Adjustable latch (FF, FaFix®)
- Adjustable electric strike (F, Fix)
- Monitoring contact (RR)
- Mechanical unlocking (E)
- Bi-directional diode
- Fail-locked
- Fail-unlocked
- Hold-open function

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions

Universal	1
-----------	---

Voltage


10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

128----- ** 1

Hold-open function 128E

Technical attributes

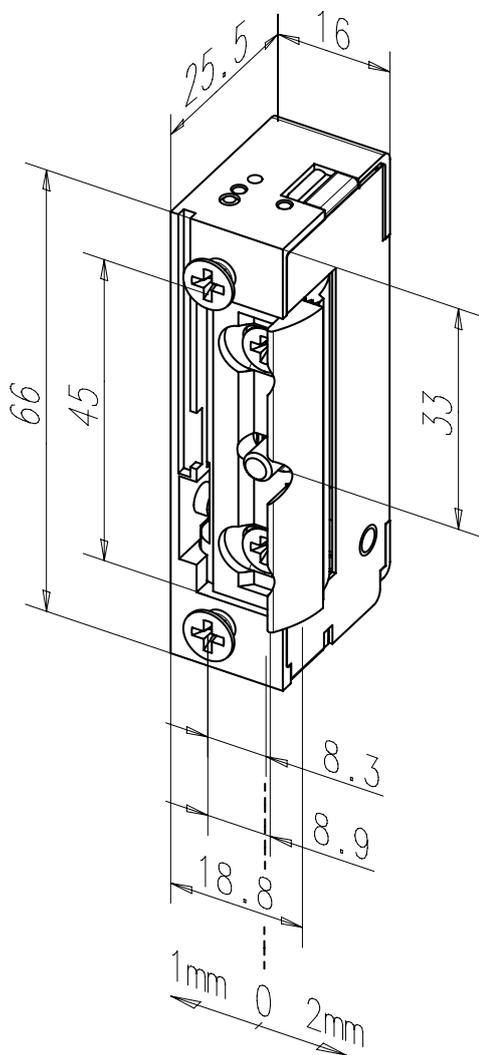

Minimum fitting size - maximum effect

effeff Standard Electric Strike 128 with FaFix® (FF)

Model with mechanical unlocking.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	•

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No


DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
128E-----	* * 1

Hold-open function 128K

Technical attributes

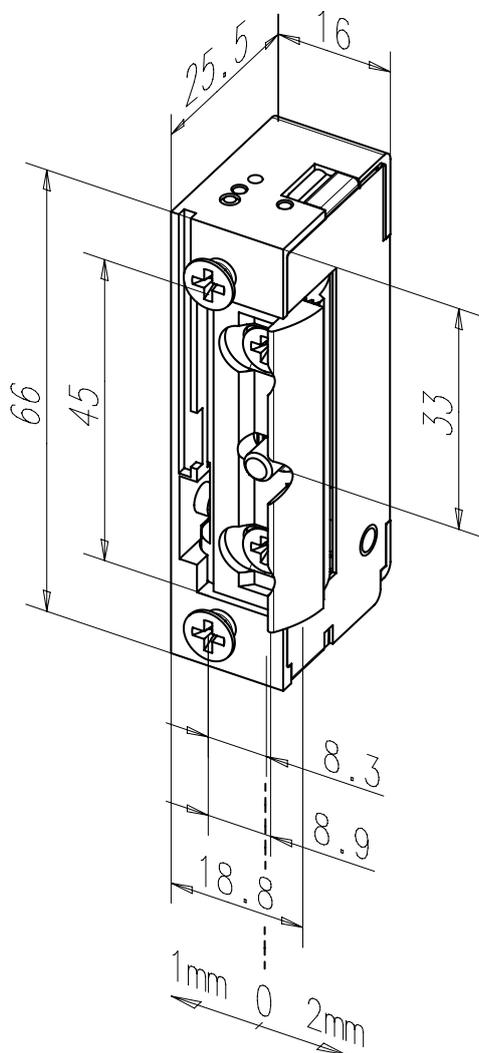

Minimum fitting size - maximum effect effeff Standard Electric Strike 128 with FaFix® (FF)

Model with connection cable, 2 x 0.5 x 2,500 mm.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Connecting cable	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Hold-open function	•

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
128K-----	** 1

Fail-unlocked 138

Technical attributes

Minimum fitting size - maximum effect effeff Standard Electric Strike 138 with FaFix® (FF)

Model with basic equipment.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable



Electrical data	12 V DC	24 V DC
Rated resistance	51 Ω	160 Ω
Current consumption DC (stabilised)	235 mA	150 mA
Max. latch preload DC (stabilised)	30 N	30 N
Contact loading capacity	1 A	1 A


Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	
Fail-unlocked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1


Voltage	
12 V DC	E9
24 V DC	F9

Order no.	
138-----	**1

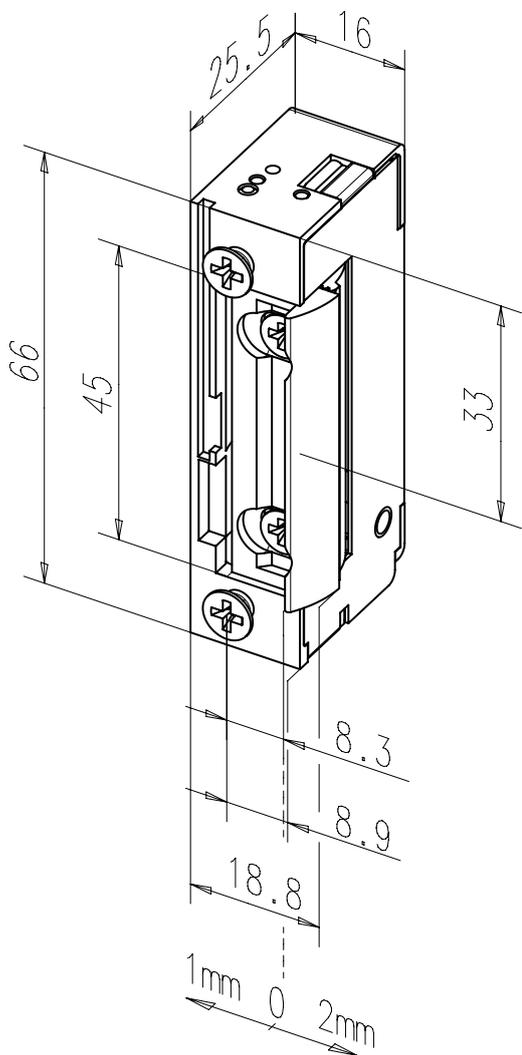

Fail-unlocked 138RR

Technical attributes

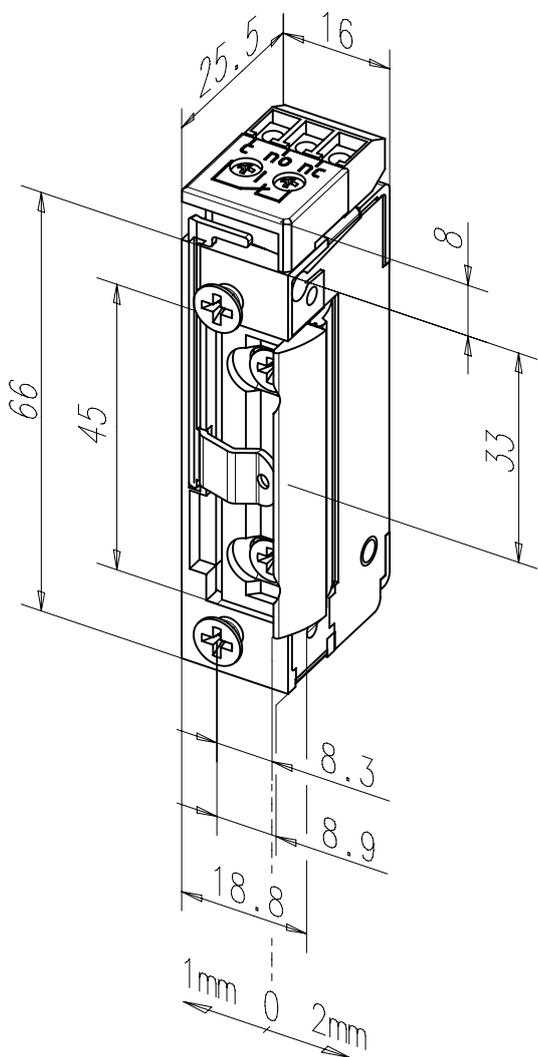

Minimum fitting size - maximum effect effeff Standard Electric Strike 138 with FaFix® (FF)

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	12 V DC	24 V DC
Rated resistance	51 Ω	160 Ω
Current consumption DC (stabilised)	235 mA	150 mA
Max. latch preload DC (stabilised)	30 N	30 N

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	•
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	
Fail-unlocked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
12 V DC	E9
24 V DC	F9

Order no.	
138RR-----	** 1

Fail-unlocked 13805

Technical attributes

Minimum fitting size - maximum effect effeff Standard Electric Strike 138 with FaFix® (FF)

Model with bipolar protective diode for access control systems.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable



Electrical data	12 V DC	24 V DC
Rated resistance	51 Ω	160 Ω
Current consumption DC (stabilised)	235 mA	150 mA
Max. latch preload DC (stabilised)	30 N	30 N


Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	•
Fail-locked	
Fail-unlocked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1


Voltage	
12 V DC	E9
24 V DC	F9

Order no.	
13805-----	** 1

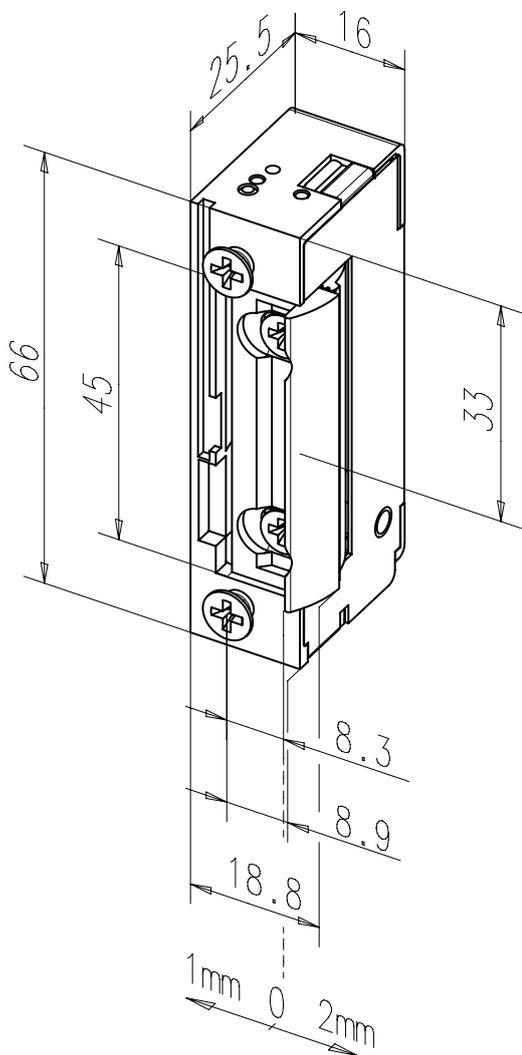

Fail-unlocked 13805RR

Technical attributes

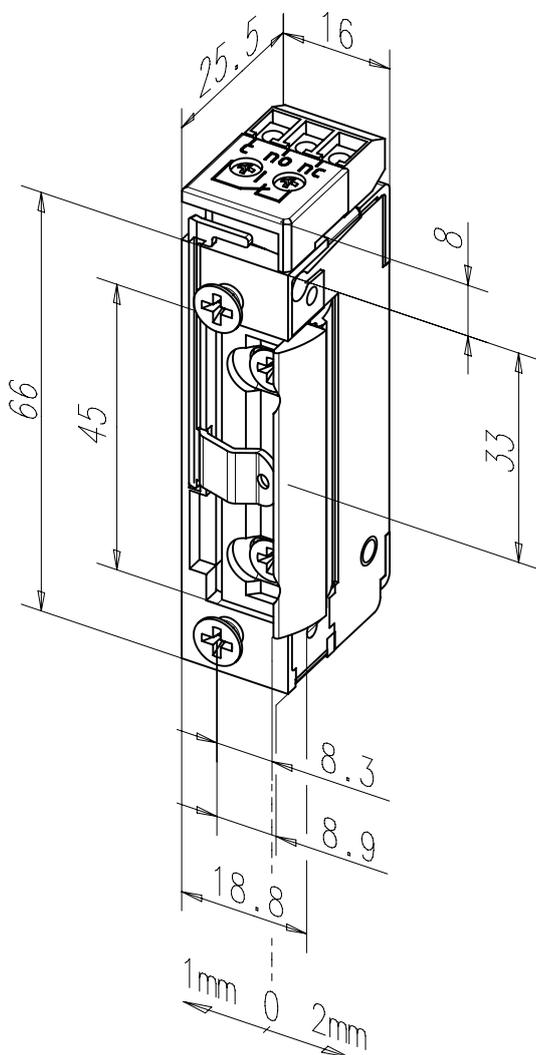

effeff Standard Electric Strike 138 with FaFix® (FF)

Model with bipolar protective diode for access control systems. Monitoring contact as potential-free changeover contact, actuated by the latch bolt.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	12 V DC	24 V DC
Rated resistance	51 Ω	160 Ω
Current consumption DC (stabilised)	235 mA	150 mA
Max. latch preload DC (stabilised)	30 N	30 N

Characteristics	Technical attributes
Adjustable latch (FF, FaFix®)	Break-in resistance 3750 N
Adjustable electric strike (F, Fix)	Height 74 mm
Monitoring contact (RR)	Width 16 mm
Mechanical unlocking (E)	Depth 25,5 mm
Bi-directional diode	FaFix® adjustment range 3 mm
Fail-locked	Latch bolt engaging depth 5,5 mm
Fail-unlocked	Operating temperature range -15 °C to +40 °C
Hold-open function	Installation position vertical and horizontal
	Load cycles for in-plant test 250000
	Switching capacity - monitoring contact 24 V / 1 A
	Suitability for fire protection No

DIN door swing directions	
Universal	1

Voltage	
12 V DC	E9
24 V DC	F9

Order no.	
13805RR-----	** 1

Fail-locked 118.13 ProFix® 2

Technical attributes



Minimum fitting size - maximum effect


effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with basic equipment.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slinding ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

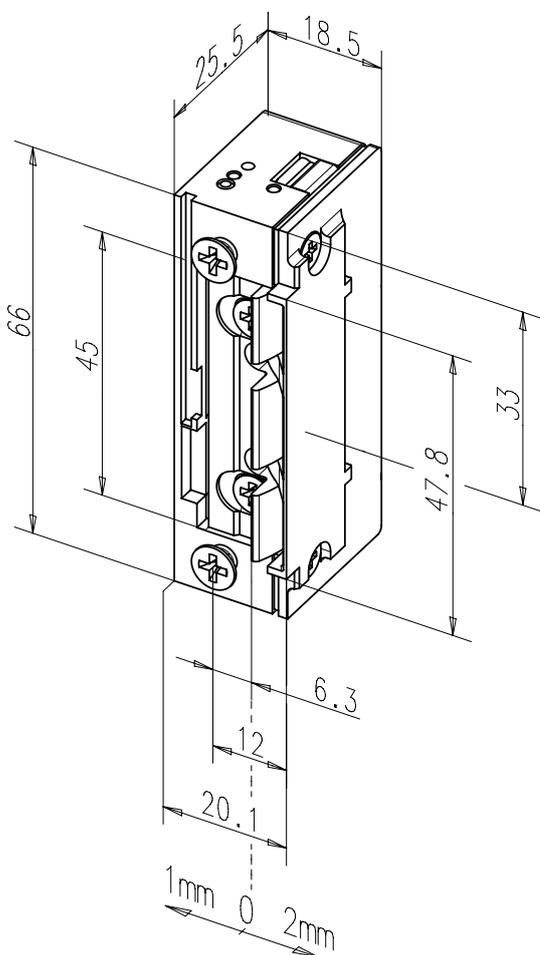

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118.13-----	* * 1

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118E.13 ProFix® 2

Technical attributes




Minimum fitting size - maximum effect effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with mechanical unlocking.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with existing ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

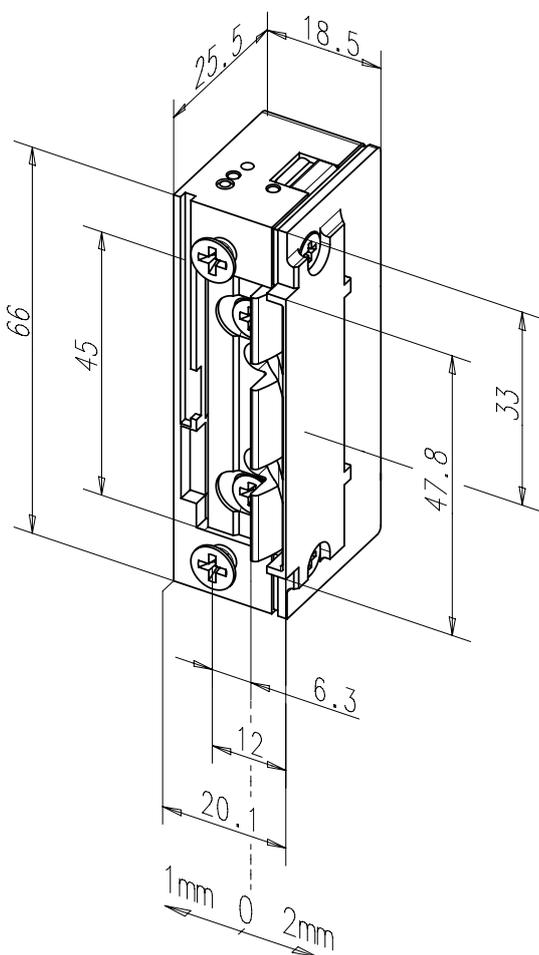

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118E.13-----	** 1

Fail-locked 118.23 ProFix® 2

Technical attributes



Minimum fitting size - maximum effect


effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

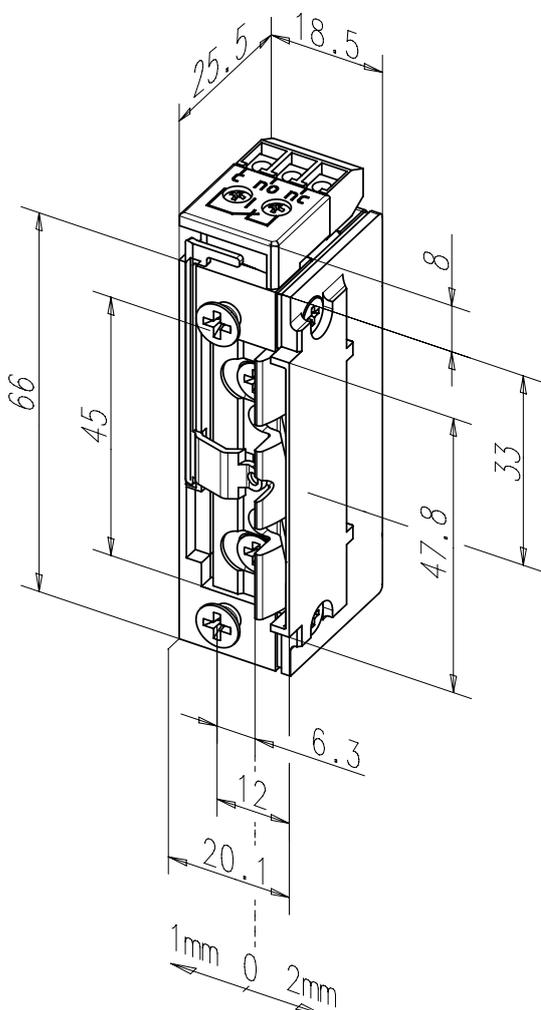

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	•
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.


118.23----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	74 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

Fail-locked 118E.23 ProFix® 2

Technical attributes

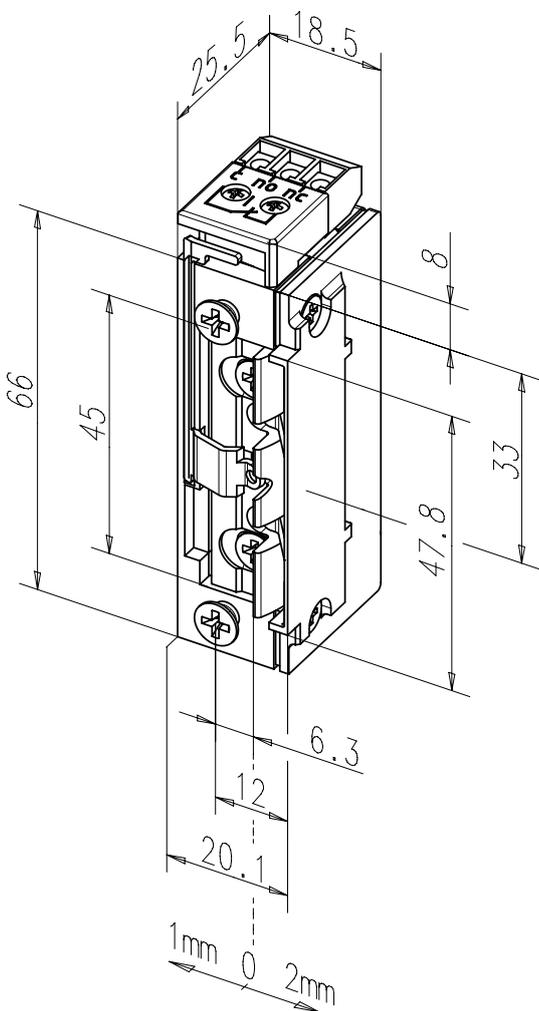

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 ProFix® 2 with FaFix® (FF)

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt. This model can also be permanently unlocked mechanically.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	•
Mechanical unlocking (E)	•
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	•
Hold-open function	•

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118E.23-----	* * 1

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

Fail-locked 118.53 ProFix® 2

Technical attributes



Minimum fitting size - maximum effect


effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with bipolar protective diode for access control systems.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slinding ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

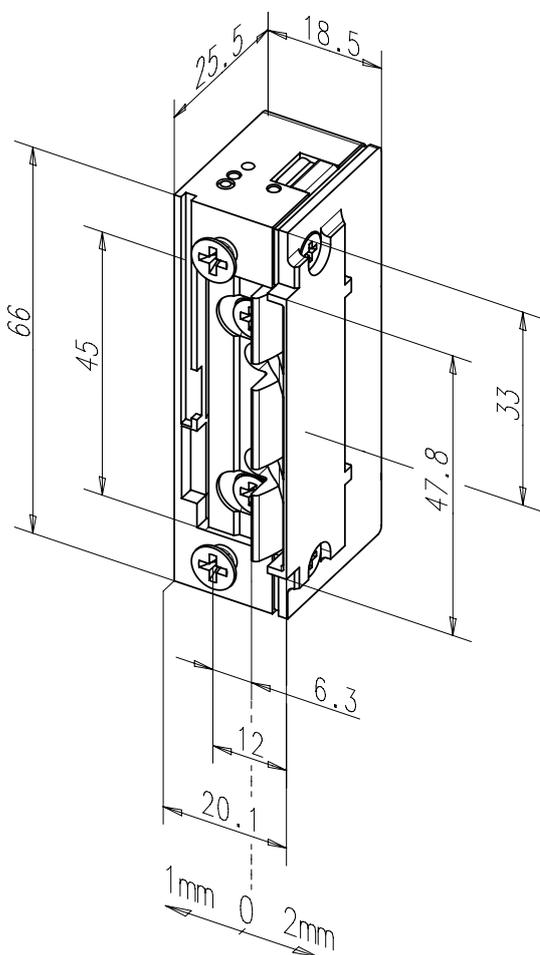

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions	
Universal	1


Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118.53-----	** 1

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118E.53 ProFix® 2

Technical attributes

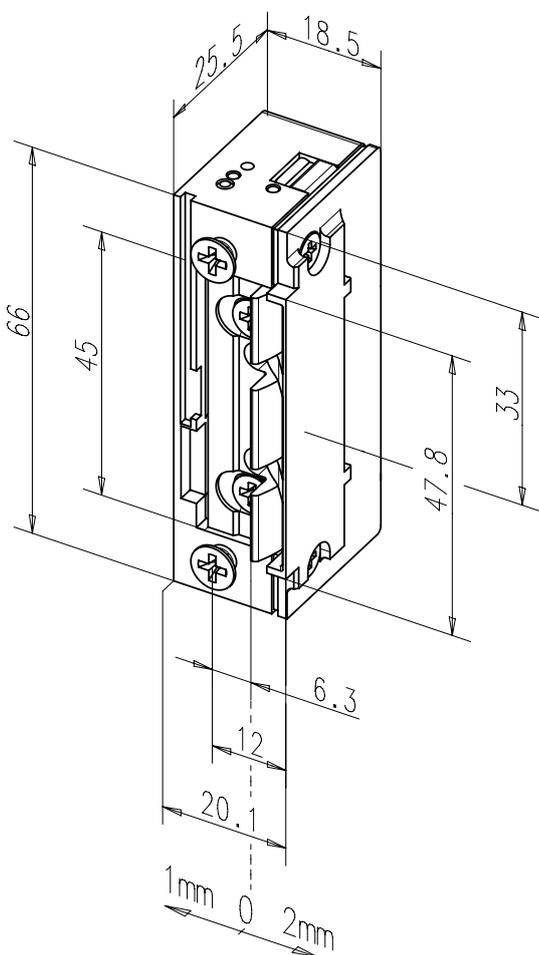

Minimum fitting size - maximum effect effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with bipolar protective diode for access control systems and mechanical unlocking.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.


118E.53----- * * 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-locked 118.63 ProFix® 2

Technical attributes

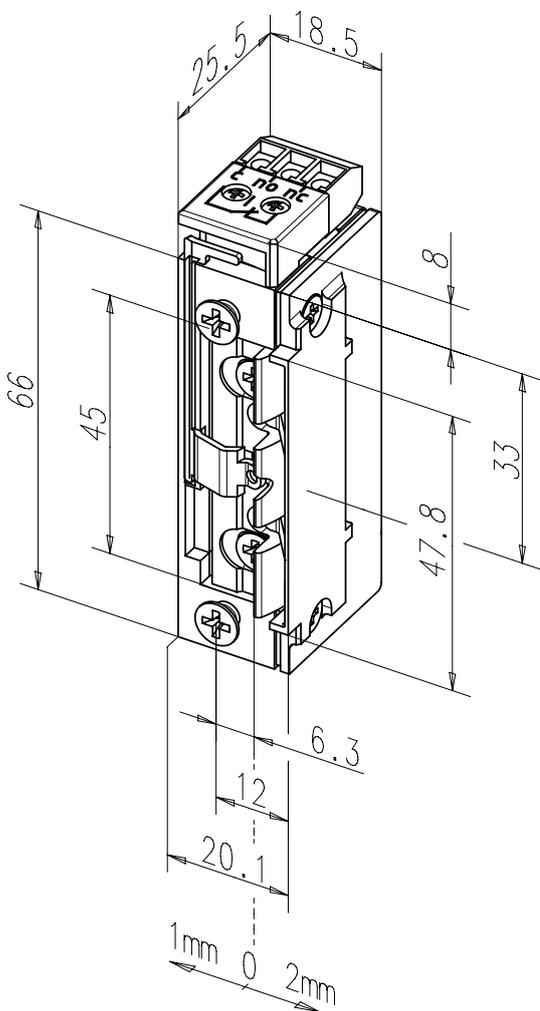

Minimum fitting size - maximum effect

effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with bipolar protective diode for access control systems. Monitoring contact as potential-free changeover contact, actuated by the latch bolt.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	•
Mechanical unlocking (E)	•
Bi-directional diode	•
Fail-locked	•
Fail-unlocked	•
Hold-open function	•

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118.63-----	** 1

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

Fail-locked 118EY13 ProFix® 2

Technical attributes




Minimum fitting size - maximum effect effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with mechanical unlocking. This door strike also includes a reinforced latch bolt spring.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

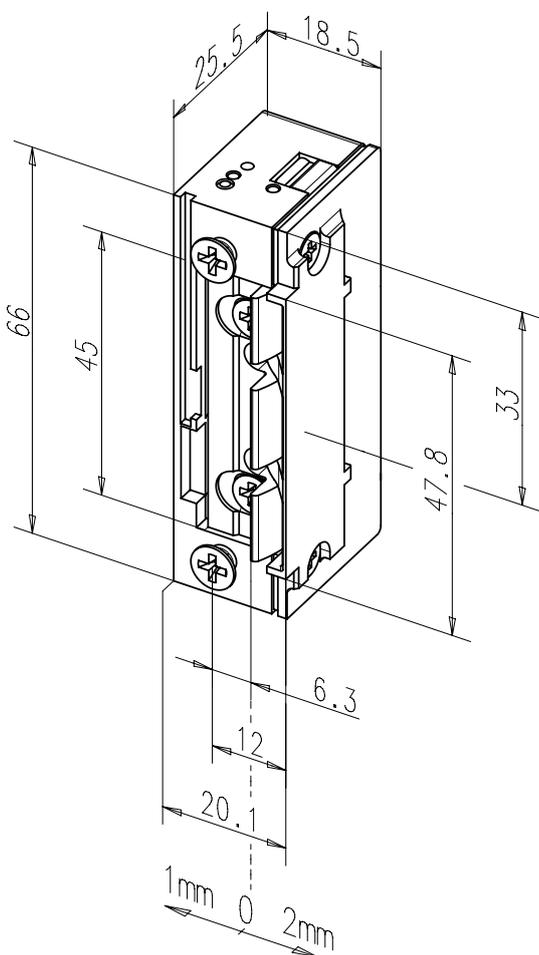

Characteristics	
Strong latch bolt spring	•
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118EY13-----	* * 1

Fail-locked 118.14 ProFix® 2

Technical attributes



Minimum fitting size - maximum effect


effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model designed for effeff Striking Angled Plates 78A, 44B, 63B and 82B.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Optimum slinding ramp for a soft interplay with latch bolt
- Usable from a x-dimension of 4 mm or more
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

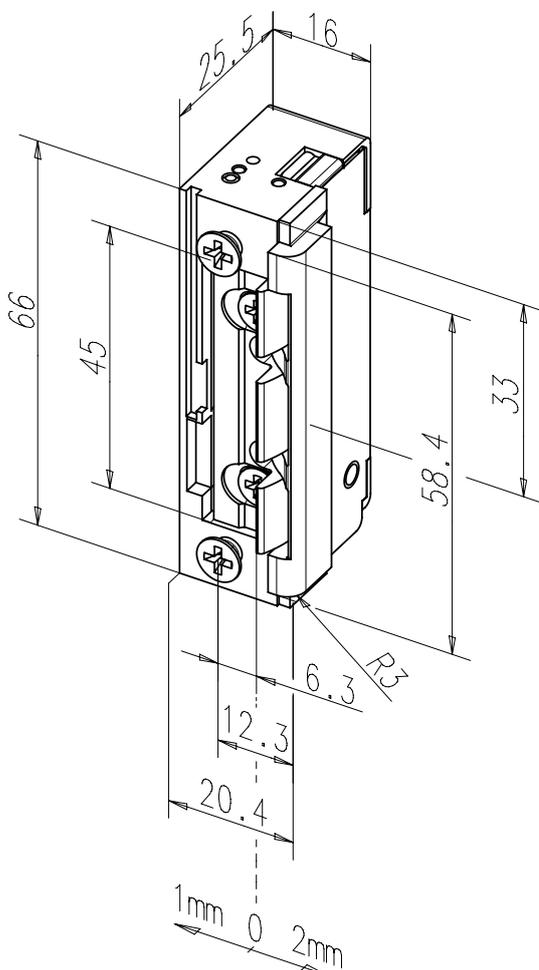

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.


118.14----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	20,4 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Fail-Locked 118E.14 ProFix® 2

Technical attributes

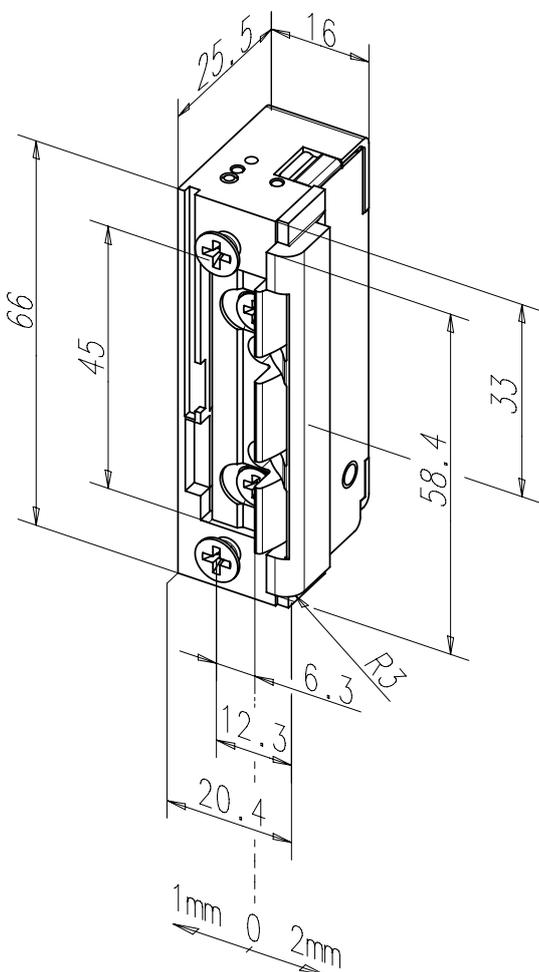

Minimum fitting size - maximum effect

effeff Standard Electric Strike 118 ProFix 2 with FaFix® (FF)

Model with mechanical unlocking for effeff Striking Angled Plates 78A, 44B, 63B and 82B.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Optimum slinding ramp for a soft interplay with latch bolt
- Usable from a x-dimension of 4 mm or more
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

118E.14----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	20,4 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Hold-open function 128.13 ProFix® 2

Technical attributes



Minimum fitting size - maximum effect


effeff Standard Electric Strike 128 ProFix® 2 with FaFix® (FF)

Model with basic equipment.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slinding ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

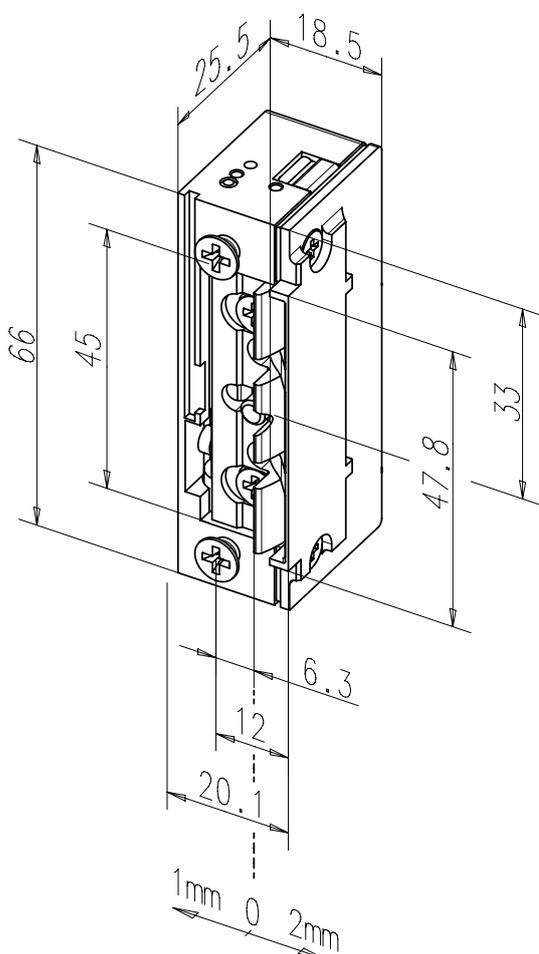

Characteristics

Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	•

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.

128.13----- ** 1

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Hold-open function 128E.13 ProFix® 2

Technical attributes




Minimum fitting size - maximum effect
effeff Standard Electric Strike 128 ProFix® 2 with FaFix® (FF)
 Model with mechanical unlocking.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

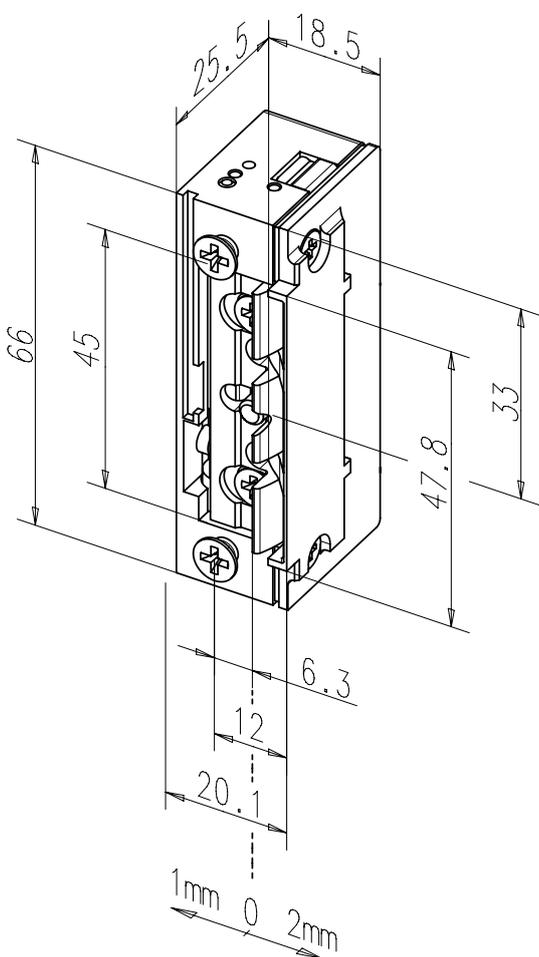

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	•

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
128E.13-----	* * 1

Fail-unlocked 138.13 ProFix® 2

Technical attributes



Minimum fitting size - maximum effect

effeff Standard Electric Strike 138 ProFix® 2 with FaFix® (FF)

Model with basic equipment.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	12 V DC	24 V DC
Rated resistance	51 Ω	160 Ω
Current consumption DC (stabilised)	235 mA	150 mA
Max. latch preload DC (stabilised)	30 N	30 N


Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	
Fail-unlocked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1


Voltage	
12 V DC	E9
24 V DC	F9

Order no.	
138.13-----	** 1

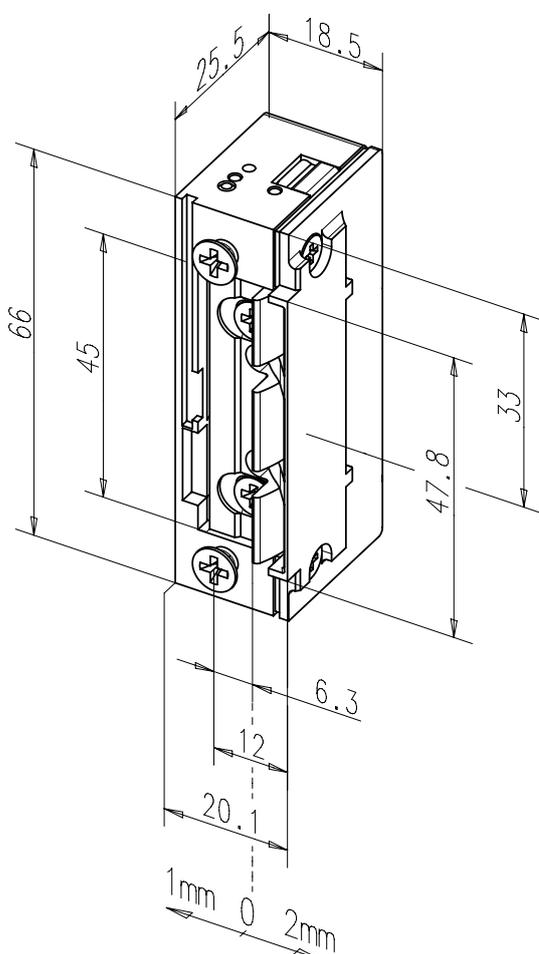

Fail-unlocked 138.53 ProFix® 2

Technical attributes

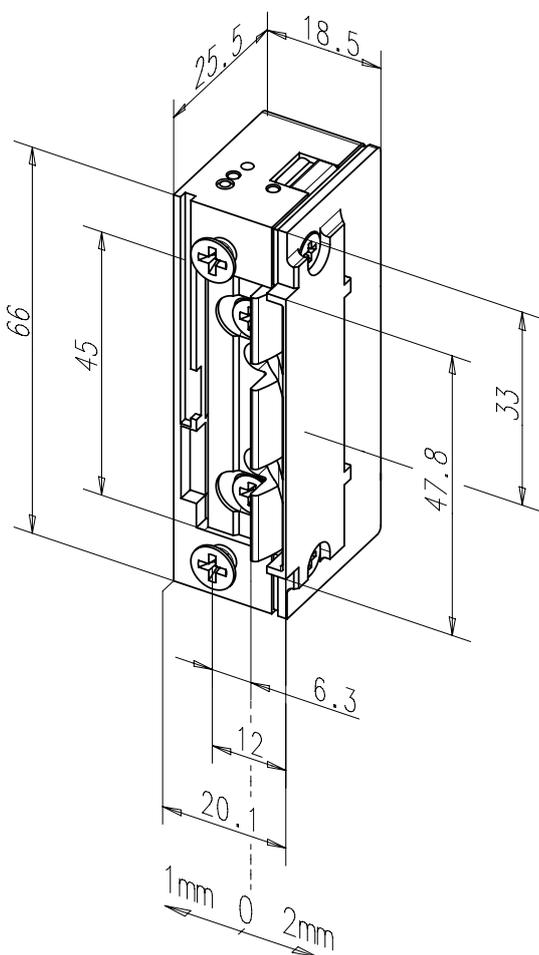

Minimum fitting size - maximum effect

effeff Standard Electric Strike 138 ProFix® 2 with FaFix® (FF)

Model with bipolar protective diode for access control systems.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	12 V DC	24 V DC
Rated resistance	51 Ω	160 Ω
Current consumption DC (stabilised)	235 mA	150 mA
Max. latch preload DC (stabilised)	30 N	30 N

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	•
Fail-locked	
Fail-unlocked	•
Hold-open function	

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
12 V DC	E9
24 V DC	F9

Order no.	
138.53-----	** 1

Fail-unlocked 138.63 ProFix® 2

Technical attributes



Minimum fitting size - maximum effect

effeff Standard Electric Strike 138 ProFix® 2 with FaFix® (FF)

Model with bipolar protective diode for access control systems. Monitoring contact as potential-free changeover contact, actuated by the latch bolt.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	12 V DC	24 V DC
Rated resistance	51 Ω	160 Ω
Current consumption DC (stabilised)	235 mA	150 mA
Max. latch preload DC (stabilised)	30 N	30 N


Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	•
Mechanical unlocking (E)	
Bi-directional diode	•
Fail-locked	
Fail-unlocked	•
Hold-open function	

DIN door swing directions	
Universal	1

Voltage	
12 V DC	E9
24 V DC	F9


Order no.	
138.63-----	** 1

Technical attributes	
Break-in resistance	3750 N
Height	74 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	No

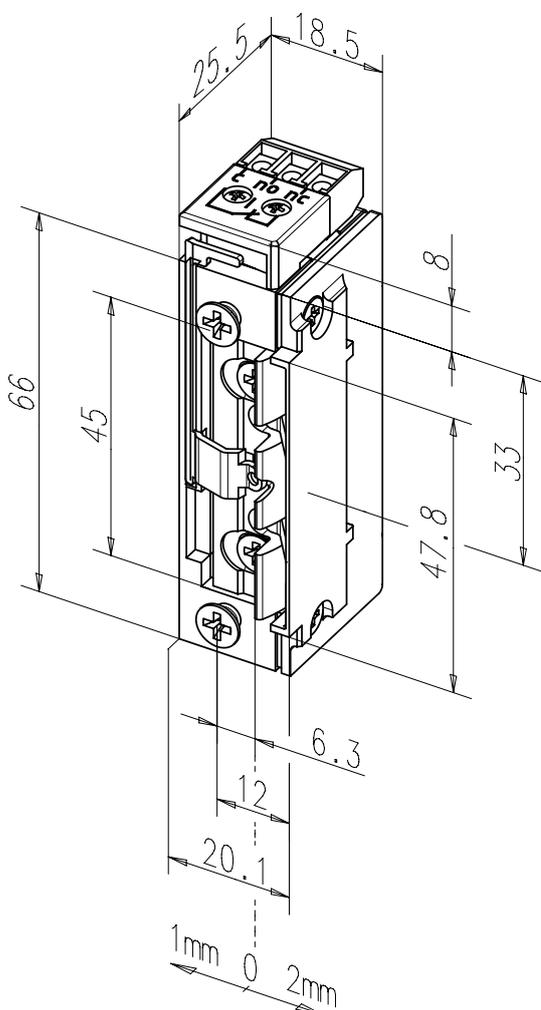

Hold-open function, without pin 148

Technical attributes

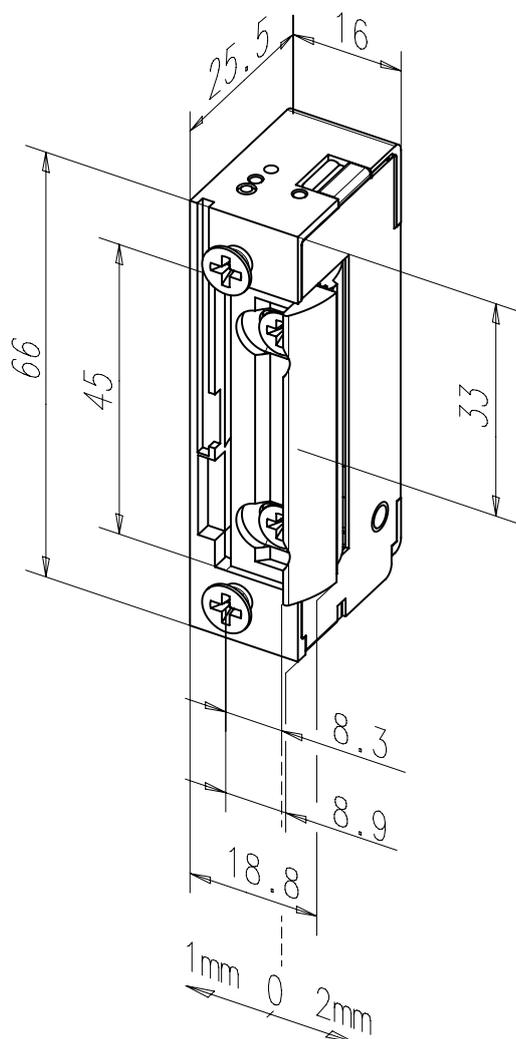

Minimum fitting size - maximum effect effeff Standard Electric Strike 148 with FaFix® (FF)

Model with basic fittings and hold-open function.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

- Adjustable latch (FF, FaFix®)
- Adjustable electric strike (F, Fix)
- Monitoring contact (RR)
- Mechanical unlocking (E)
- Bi-directional diode
- Fail-locked
- Fail-unlocked
- Hold-open function

DIN door swing directions

Universal	1
-----------	---

Voltage

10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.


148----- **

Technical attributes

Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Hold-open function, without pin 148E

Technical attributes

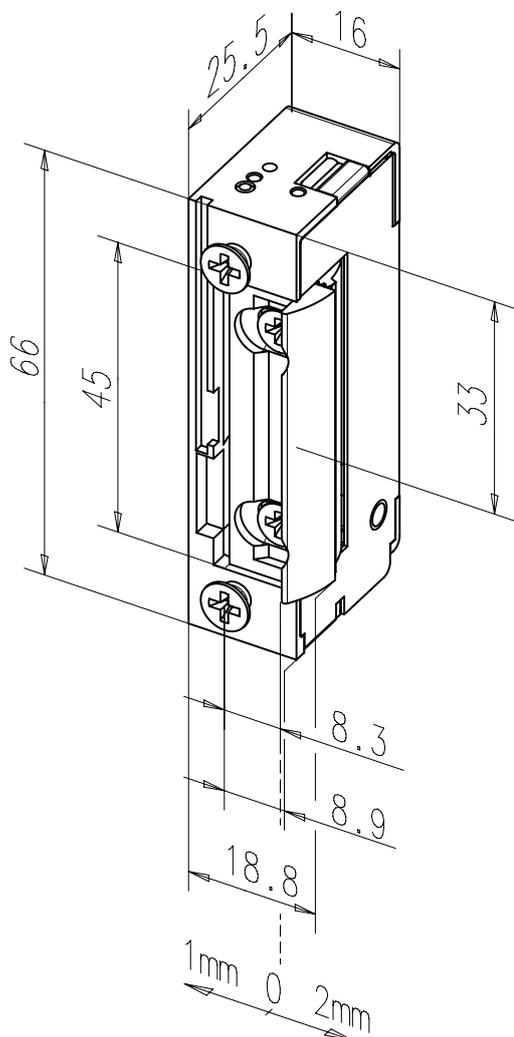

Minimum fitting size - maximum effect effeff Standard Electric Strike 148 with FaFix® (FF)

Model with mechanical permanent unlocking system in door strike latch and hold-open function.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	•
Hold-open function	•

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
148E-----	** 1

Hold-open function, without pin 148.13 ProFix® 2

Technical attributes




Minimum fitting size - maximum effect effeff ProFix Electric Strike 148.13

Model with basic fittings and hold-open function.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

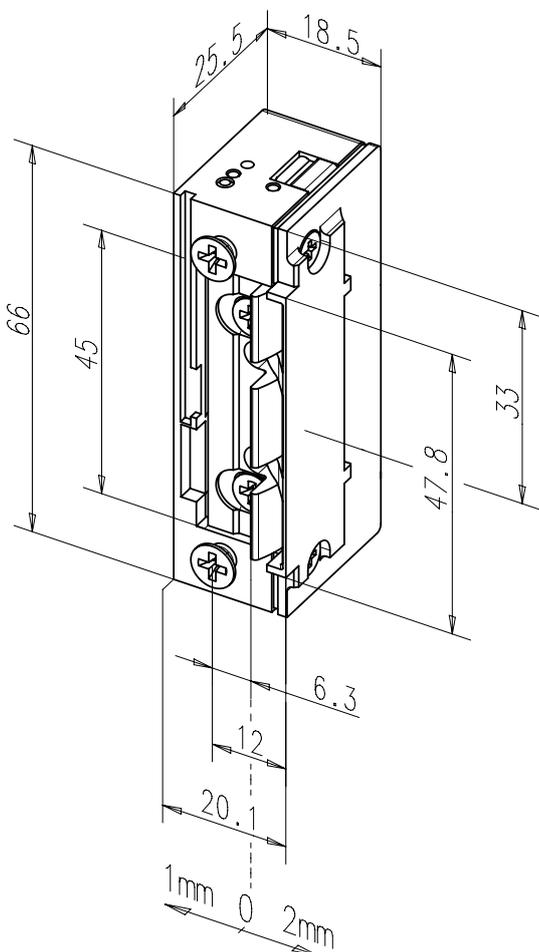

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Mechanical unlocking (E)	
Bi-directional diode	
Fail-locked	•
Fail-unlocked	•
Hold-open function	•

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
148.13-----	** 1

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

Hold-open function, without pin 148E.13 ProFix® 2

Technical attributes




Minimum fitting size - maximum effect effeff Standard Electric Strike 148 with FaFix® (FF)

Model with mechanical permanent unlocking system in door strike latch and hold-open function.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- Universal voltage
- Screw-in Terminal / plug-in connection
- Compatible with current mortise locks
- Compatible with existing ProFix® 2 striking plates
- Optimum slindig ramp for a soft interplay with latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

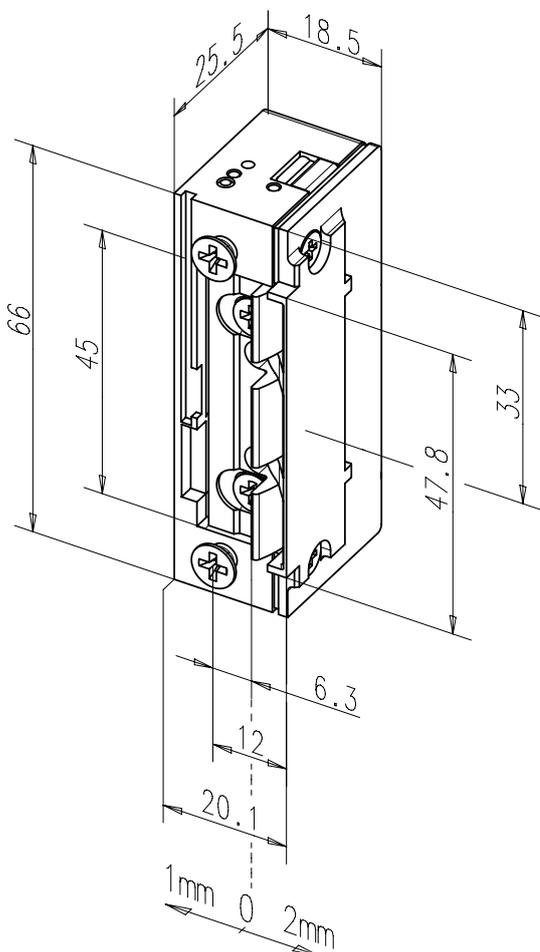

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	
Monitoring contact (RR)	
Mechanical unlocking (E)	•
Bi-directional diode	
Fail-locked	•
Fail-unlocked	
Hold-open function	•

DIN door swing directions	
Universal	1

Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
148E.13-----	* * 1

Technical attributes	
Break-in resistance	3750 N
Height	66 mm
Width	20,1 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	5,5 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	No

The most prevalent versions

Standard

Order codes	10-24V AC/DC	22-42V AC/DC	Pro Fix2	Fail- locked	Fail- unlocked	12V DC 100% power-on time	24V DC 100% power-on time	Unlocking lever	Bipolar protective diode	Monitoring contact	Hold-open function	FaFix +1/-2mm
118-----A71	•			•		•						•
118-----B71		•		•			•					•
118E-----A71	•			•		•		•				•
118E-----B71		•		•			•	•				•
118RR-----A71	•			•		•				•		•
118RR-----B71		•		•			•			•		•
118RRE-----A71	•			•		•		•		•		•
118RRE-----B71		•		•			•	•		•		•
11805-----A71				•		•			•			•
11805-----B71				•			•		•			•
11805E-----A71				•		•		•	•			•
11805E-----B71				•			•	•	•			•
11805RR-----A71				•		•			•	•		•
11805RR-----B71				•			•		•	•		•
128-----A71	•			•		•					•	•
128-----B71		•		•			•				•	•
128E-----A71	•			•		•		•			•	•
128E-----B71		•		•			•	•			•	•
148-----A71	•			•		•					•*	•
148-----B71		•		•			•				•*	•
148E-----A71	•			•		•		•			•*	•
148E-----B71		•		•			•	•			•*	•
138-----E91					•	•						•
138-----F91					•		•					•
13805-----E91					•	•			•			•
13805-----F91					•		•		•			•
138RR-----E91					•	•				•		•
138RR-----F91					•		•			•		•
13805RR-----E91					•	•			•	•		•
13805RR-----F91					•		•		•	•		•
118.130-----A71	•			•		•						
118E130-----A71	•			•		•		•				

* = Hold open function without pin

Note:

Other combinations possible, such as 128 with a bipolar protective diode = 12805-----A71

- Fail-unlocked electric strikes in Model Range 138 are not suitable for use on escape and emergency access routes

The most prevalent versions of ProFix® 2

Standard

Order codes	10-24V AC/DC	22-42V AC/DC	Pro Fix2	Fail- locked	Fail- un- locked	12V DC 100% power-on time	24V DC 100% power-on time	Unlocking lever	Bipolar protective diode	Monitoring contact	Hold-open function	FaFix +1/-2mm
118.13-----A71
118.13-----B71	
118E.13-----A71
118E.13-----B71	
118.23-----A71
118.23-----B71	
118E.23-----A71
118E.23-----B71	
118.53-----A71		
118.53-----B71		
118E.53-----A71		
118E.53-----B71		
118.63-----A71		
118.63-----B71		
<hr/>												
128.13-----A71
128.13-----B71	
128E.13-----A71
128E.13-----B71	
<hr/>												
148-----A71*	.
148-----B71	*	.
148E-----A71*	.
148E-----B71	*	.
<hr/>												
138.13-----E91		
138.13-----F91		
138.23-----E91		
138.23-----F91		
138.53-----E91		
138.53-----F91		
138.63-----E91		
138.63-----F91		

* = Hold open function without pin

Note:

Other combinations possible, such as 128 with a bipolar protective diode = 12805-----A71

· Fail-unlocked electric strikes in Model Range 138 are not suitable for use on escape and emergency access routes



for fire rated doors

Electric Strike Model 118F
for fire rated doors

Fail-locked 118F

Technical attributes




Minimum fitting size - maximum effect effeff Fire-rated Electric Strike 118F with FaFix® (FF)

Model with basic equipment. Also useable as a heavy-duty electric strike.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- FaFix® latch adjustable in 0,5 mm increments
- Universal voltage
- Screw-in Terminal / plug-in connection
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

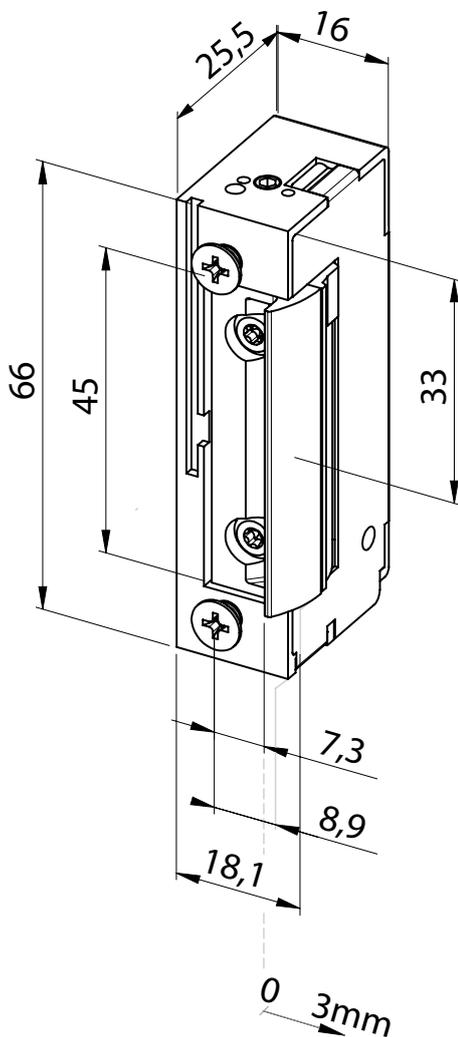

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	
Bi-directional diode	•
Fail-locked	•

DIN door swing directions	
Universal	1


Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118F-----	** 1

Technical attributes	
Break-in resistance	9000 N
Height	66 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	6 mm
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Operating temperature range	-15 °C to +40 °C
Suitability for fire protection	Yes
Test certificate number	P-120003624

Fail-Locked 118FRR

Technical attributes

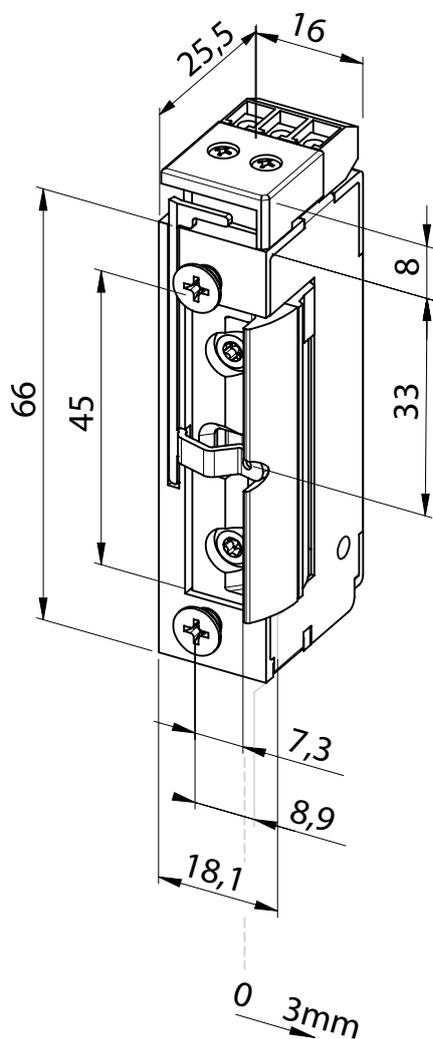

Minimum fitting size - maximum effect effeff Fire-rated Electric Strike 118F with FaFix® (FF)

Model with monitoring contact as potential-free changeover contact, actuated using a lever on the latch bolt. Also useable as a heavy-duty electric strike.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- FaFix® latch adjustable in 0.5 mm increments
- Universal voltage
- Screw-in Terminal / plug-in connection
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics	
Adjustable latch (FF, FaFix®)	•
Adjustable electric strike (F, Fix)	•
Monitoring contact (RR)	•
Bi-directional diode	•
Fail-locked	•

DIN door swing directions	
Universal	1


Voltage	
10-24 V AC/DC	A7
22-42 V AC/DC	B7

Order no.	
118FRR-----	** 1

Technical attributes	
Break-in resistance	9000 N
Height	74 mm
Width	16 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	6 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Operating temperature range	-15 °C to +40 °C
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	Yes
Test certificate number	P-120003624

Fail-locked 118F.14 ProFix® 2

Technical attributes

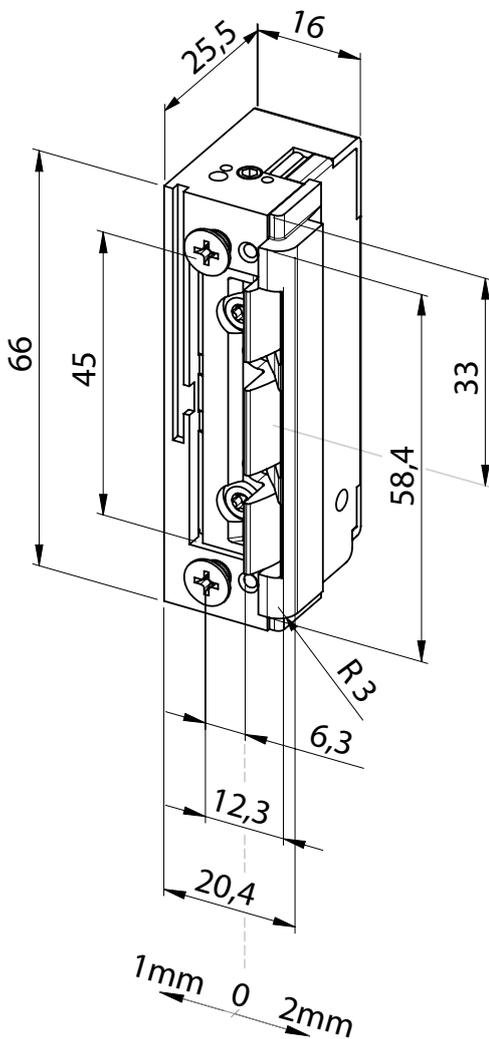

Minimum fitting size - maximum effect

effeff Fire-rated Electric Strike 118F ProFix 2 with FaFix® (FF)

Model designed for effeff Striking Angled Plates 78A, 44B, 63B and 82B. Also useable as a heavy-duty electric strike.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- FaFix® latch adjustable in 0.5 mm increments
- Universal voltage
- Screw-in Terminal / plug-in connection
- Optimum slindig ramp for a soft interplay with latch bolt
- Usable from a x-dimension of 4 mm or more
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

- Adjustable latch (FF, FaFix®)
- Adjustable electric strike (F, Fix)
- Monitoring contact (RR)
- Bi-directional diode
- Fail-locked

DIN door swing directions

- Universal 1

Voltage

- 10-24 V AC/DC A7
- 22-42 V AC/DC B7

Order no.


118F.14----- ** 1

Technical attributes

Break-in resistance	9000 N
Height	66 mm
Width	20,4 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	6 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Suitability for fire protection	Yes
Test certificate number	P-120003624

Fail-locked 118F.24 ProFix® 2

Technical attributes

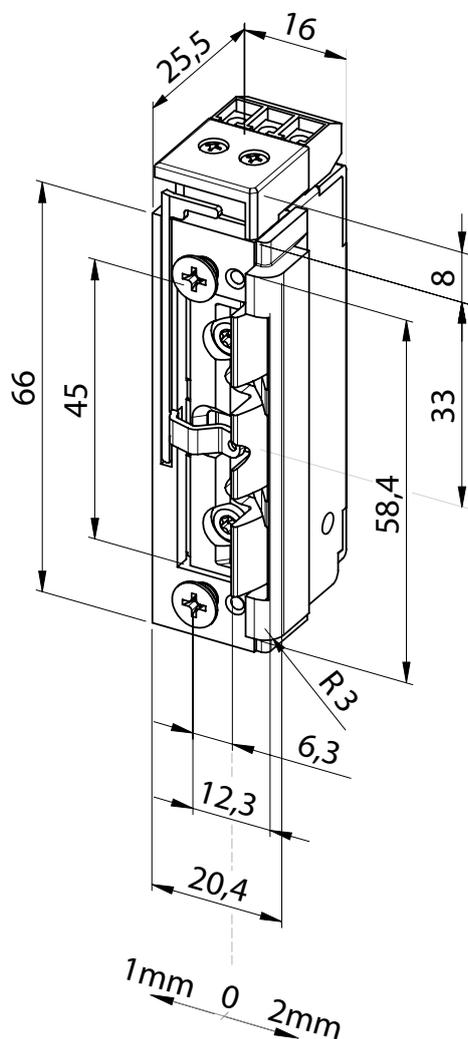

Minimum fitting size - maximum effect

effeff Fire-rated Electric Strike 118F ProFix 2 with FaFix® (FF)

Model with bipolar protective diode for access control systems for effeff Striking Angled Plates 78A, 44B, 63B and 82B. Monitoring contact as potential-free changeover contact, actuated by the latch bolt. Also useable as a heavy-duty electric strike.

The advantages at a glance

- Radius keep, FaFix®, adjustable by 3 mm
- FaFix® latch adjustable in 0.5 mm increments
- Universal voltage
- Screw-in Terminal / plug-in connection
- Optimum slinding ramp for a soft interplay with latch bolt
- Usable from a x-dimension of 4 mm or more
- Symmetrical design. DIN left/right as well as horizontal applicable

Electrical data	10-24 V AC/DC	22-42 V AC/DC
Continuous duty	11-13 V DC	22-26 V DC
Rated resistance	43 Ω	200 Ω
AC current consumption	250 mA (12V) 500 mA (24V)	60 mA (24V)
Current consumption DC (stabilised)	280 mA (12V) 560 mA (24V)	120 mA (24V)
Max. latch preload AC	200 N (12V) >350 N (24V)	200 N (24V) >350 N (42V)
Max. latch preload DC (stabilised)	50 N (12V) 200 N (24V)	50 N (24V) 200 N (42V)

Characteristics

- Adjustable latch (FF, FaFix®)
- Adjustable electric strike (F, Fix)
- Monitoring contact (RR)
- Bi-directional diode
- Fail-locked

DIN door swing directions

- Universal 1

Voltage

- 10-24 V AC/DC A7
- 22-42 V AC/DC B7

Order no.

118F.24----- ** 1

Technical attributes

Break-in resistance	9000 N
Height	74 mm
Width	20,4 mm
Depth	25,5 mm
FaFix® adjustment range	3 mm
Latch bolt engaging depth	6 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Load cycles for in-plant test	250000
Switching capacity - monitoring contact	24 V / 1 A
Suitability for fire protection	Yes
Test certificate number	P-120003624

The most prevalent versions

Fire protection



Order codes	10-24V AC/DC	22-42V AC/DC	Pro- Fix2	Fail- locked	12V DC 100% power-on time	24V DC 100% power-on time	Bipolar protective diode	Monitoring contact	FaFix +1/-2mm
1 1 8 F - - - - - A 7 1	•			•	•		•		•
1 1 8 F - - - - - B 7 1		•		•		•	•		•
1 1 8 F R R - - - - - A 7 1	•			•	•		•	•	•
1 1 8 F R R - - - - - B 7 1		•		•		•	•	•	•

Order codes ProFix® 2	10-24V AC/DC	22-42V AC/DC	Pro- Fix2	Fail- locked	12V DC 100% power-on time	24V DC 100% power-on time	Bipolar protective diode	Monitoring contact	FaFix +1/-2mm
1 1 8 F . 1 3 - - - - - A 7 1	•		•	•	•		•		•
1 1 8 F . 1 3 - - - - - B 7 1		•	•	•		•	•		•
1 1 8 F . 2 3 - - - - - A 7 1	•		•	•	•		•	•	•
1 1 8 F . 2 3 - - - - - B 7 1		•	•	•		•	•	•	•

Order codes ProFix® 2	10-24V AC/DC	22-42V AC/DC	Pro- Fix2	Fail- locked	12V DC 100% power-on time	24V DC 100% power-on time	Bipolar protective diode	Monitoring contact	FaFix +1/-2mm
1 1 8 F . 1 4 - - - - - A 7 1	•		•	•	•		•		•
1 1 8 F . 1 4 - - - - - B 7 1		•	•	•		•	•		•
1 1 8 F . 2 4 - - - - - A 7 1	•		•	•	•		•	•	•
1 1 8 F . 2 4 - - - - - B 7 1		•	•	•		•	•	•	•

Models 118F.14 and 118F.24 are designed for use in special angled strike plates, such as Strike Plates nos. 78A, 44B and 63B.

Structural engineering regulations (Germany):

According to the German Institute for Building Technology's notifications, electric strikes in fire protection barriers must not be operated with a permanently unlocked function.

Note:

Electric strikes may only be retrofitted to fire doors if there is express approval by the door element manufacturer.

The manufacturer should thus always be contacted for clarification.

Available versions and special solutions in effeff Model Range 118 and 118F

The large number of different door system installation locations and structural conditions calls for non-standard solutions.



Series 118.500 with offset screw-on threads

The electric strikes in Series 118.500, 118E500 and 118F500 (also Series 128, 138 and 148) have screw-on threads offset by 1 mm towards opening side. The electric strike is thus positioned 1 mm further into the door frame, increasing the door contact pressure by 1 mm. The thread depth is longer than the Standard 118 Series and can thus be easily combined with strike plates up to 1.5 mm thick, such as U-shaped strike plates.

Series 118.13B for PVC profiles

Series 118.13B electric strikes are mainly designed for PVC profiles. Aesthetic appeal is added by the shape of the ProFix2 cover latch bolt guide, which features an outline suitable for use with the most common U-shaped strike plates or keep rails.

The profile wall around the cut-out for the electric strike is still 3 mm thick. The full FaFix adjustment range of 3mm is maintained. This ensures adjustable x measurements between 5.2 mm - 6.2 mm and 7.2 mm - 8.2 mm.

Versions for higher contact pressure

Series 118 Electric strikes can be fitted with a variety of screw-on attachments (FaFix brackets) in the factory. Unlike Model 118.500, the entire electric strike remains in the same installation position, but the contact pressure can be increased by using different screw-on attachments.

Example of item code for contact pressure increased by 1.5 mm: 118E343-----A71

Note: Thicker screw-on attachments are not available for Model 118F.

Version '66' of Model 118E with shorter strike plate screws

Version '66' electric strikes come with shorter M4x6 strike plate screws. They can be used with strike plates between 1.5 mm and 2 mm thick.

Example of item code: 118E-----A7166

Note: Version '66' is not available for Model 118F.

Series 118EY with extra strong latch bolt spring


Depending on the door system and door seal design, a stronger latch bolt spring may be beneficial when operating in daytime unlocked mode (unlocking lever). Wind or a difference in air pressure due to air conditioning may push doors open. Series 118EY electric strikes are fitted with a stronger latch spring in the factory to counteract such pressure. Series 118E Electric strikes, such as Item 118E-----A71, are fitted with a 45N* latch spring force as standard. Series 118EY Electric strikes, such as Item 118EY-----A71, are fitted with a 70N* latch spring force as standard.

* Tractive force measured on a door knob in an aluminium door system.

Series 118EQA with weak latch bolt spring

Weak latch bolt springs can reduce noise emission and the force required to open doors. These are primarily used in doors featuring a door closer or door automatics.

Other variations and tailor-made designs are available on request.
Please contact us for further information on **+49 (0) 7431 123 381**

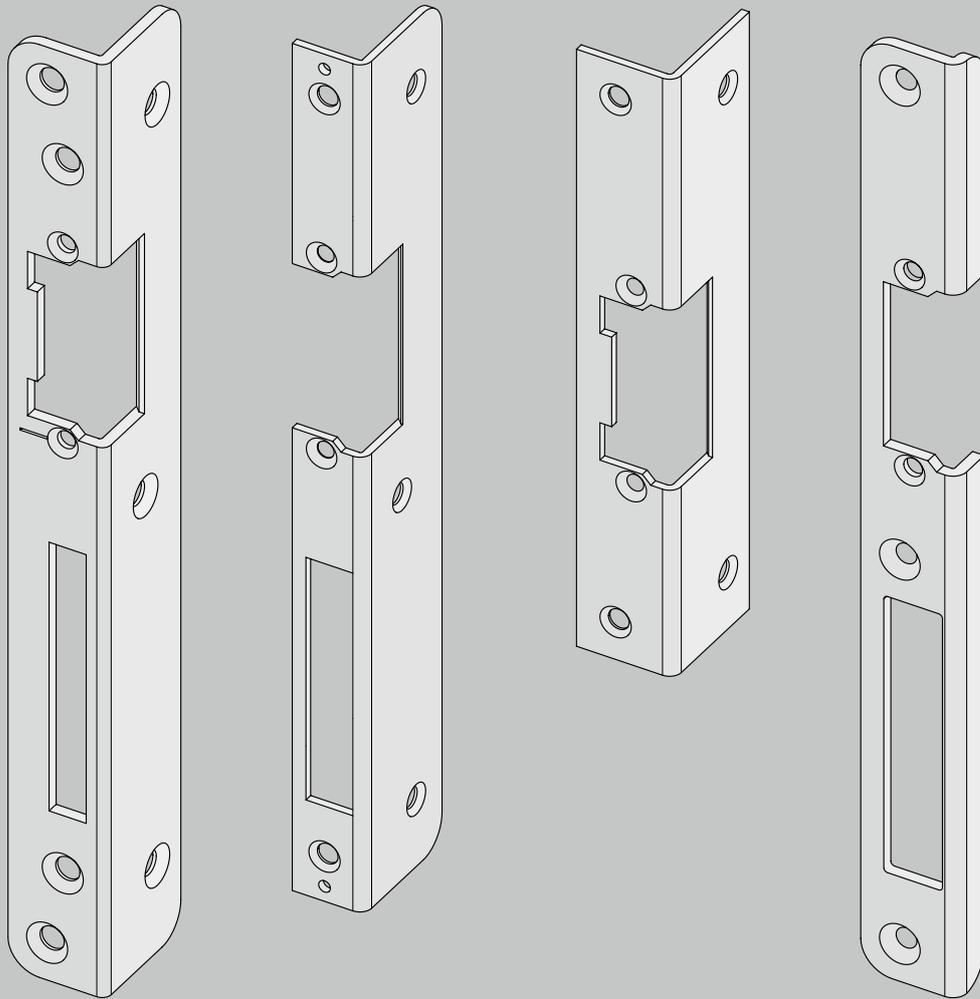

Striking plates for electric strikes
for 118 and 118 Series

Striking plates

General information

effeff striking plates are available in an extensive range of designs. The electric strikes in Model Range 118 are essentially compatible with our existing range of strike plates. You can find newly designed strike plates on the following pages.

Please note that ProFix 2 Electric Strikes must only be combined with ProFix2 Strike Plates.

effeff supplies striking plates in a wide variety of designs

- Rounded striking plates are mainly used in wood frames.
- Square striking plates are mainly used in metal frames.
- Different latch-bolt dimensions allow different locks to be combined.
- Flat, flanged striking plates are normally used with non-rebated doors and doors which open outwards.
- Angled striking plates are mainly used in wood structures, but are also sometimes used in metal structures.

From ProFix® 1 to ProFix® 2



ProFix 1	ProFix 2
-----52035-01	-----94A35-01
-----52135-01	-----14C35-01
	-----15C35-01
-----52335-01	-----20C35-01
-----52235-01	-----21C35-01
-----53535-01	-----22C35-01
-----52435-01	-----23C35-01
-----52935-01	-----24C35-01
-----53435-01	-----25C35-01

Example:

Until now, you have used:
ProFix®1 Striking Plate no. 520
Item no.: -----52035-01

You would now like to use ProFix2.
ProFix®2 Striking Plate no. 94A
Item no.: -----94A35-01

Order suffix for the DIN swing direction:

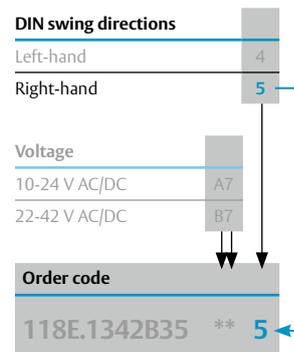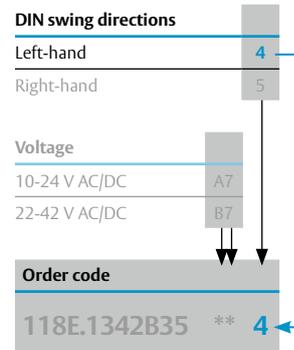

This table will help you to change over from ProFix®1 to ProFix®2.

Angled Striking Plate no. 42B

ProFix® 2

Angled striking plate with dead bolt cut-out.

The advantages at a glance

- Slim-fit outer dimensions
- With dead bolt cut-out


Technical attributes

Length	250 mm
Width	28 mm
Thickness	3 mm
x measurement	8,0 - 11,0 mm
Shank dimension 1	28 mm
Shank dimension 2	9 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----42B35-04
35 Stainless steel	5 Right-hand	-----42B35-05


Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

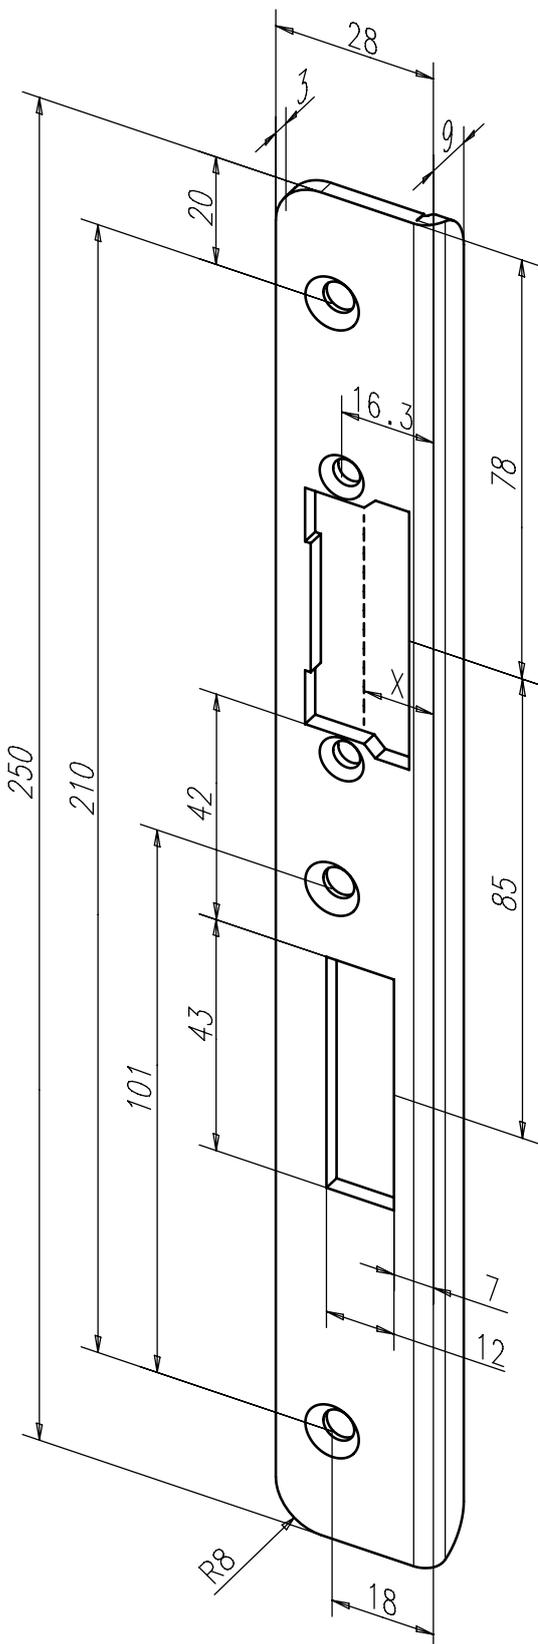

Angled Striking Plate no. 44B

ProFix® 2

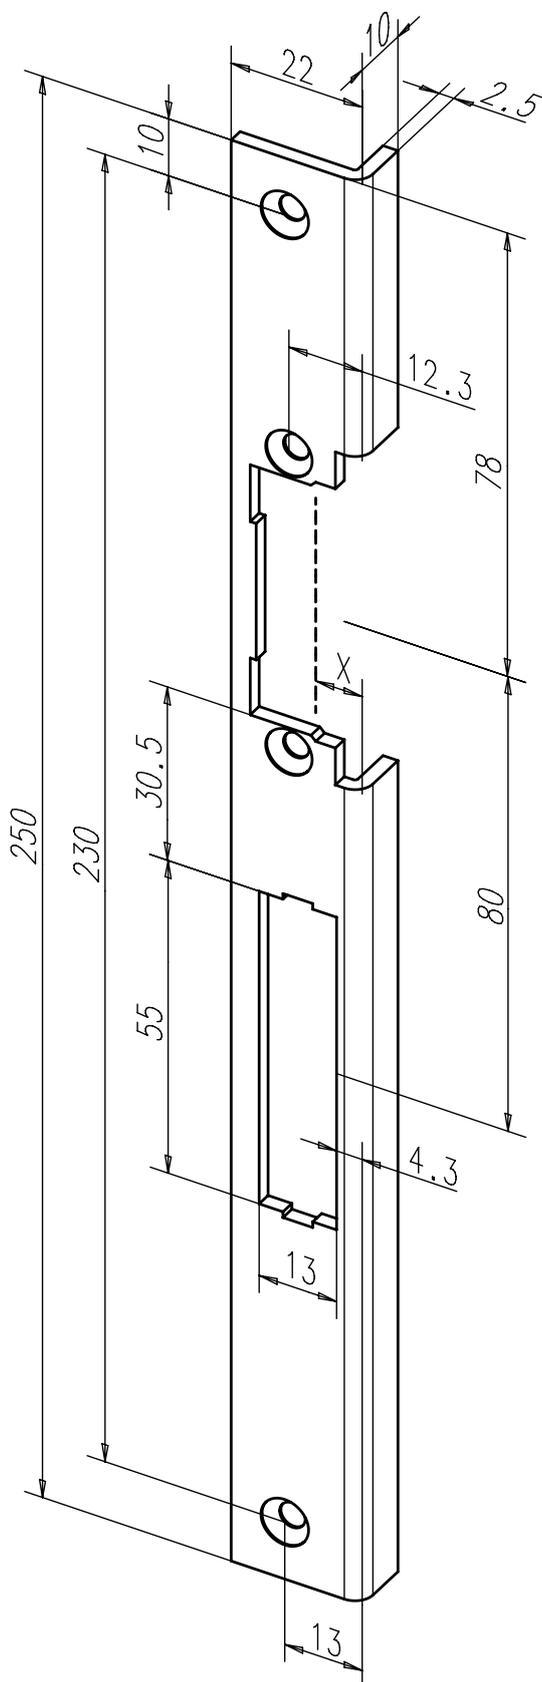

Angled striking plate with dead bolt cut-out.

The advantages at a glance

- Slim-fit outer dimensions
- Supply includes bolt pocket
- With dead bolt cut-out
- Suitable for standard-compliant steel frames

Technical attributes

Length	250 mm
Width	22 mm
Thickness	2,5 mm
x measurement	4.0 - 7.0 mm
Shank dimension 1	22 mm
Shank dimension 2	10 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----44B35-04
35 Stainless steel	5 Right-hand	-----44B35-05

Compatible electric strike models

- 118.14
- 118.24
- 118S.14
- 118S.24
- 118F.14
- 118F.24

Angled Striking Plate no. 45B

ProFix® 2

Angled striking plate with dead bolt cut-out.

The advantages at a glance


- Slim-fit outer dimensions
- with bolts, 16x8mm calibre for greater stability
- With dead bolt cut-out

Technical attributes	
Length	250 mm
Width	28 mm
Thickness	3 mm
x measurement	7.5 - 10.5 mm
Shank dimension 1	28 mm
Shank dimension 2	9 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----45B35-04
35 Stainless steel	5 Right-hand	-----45B35-05

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

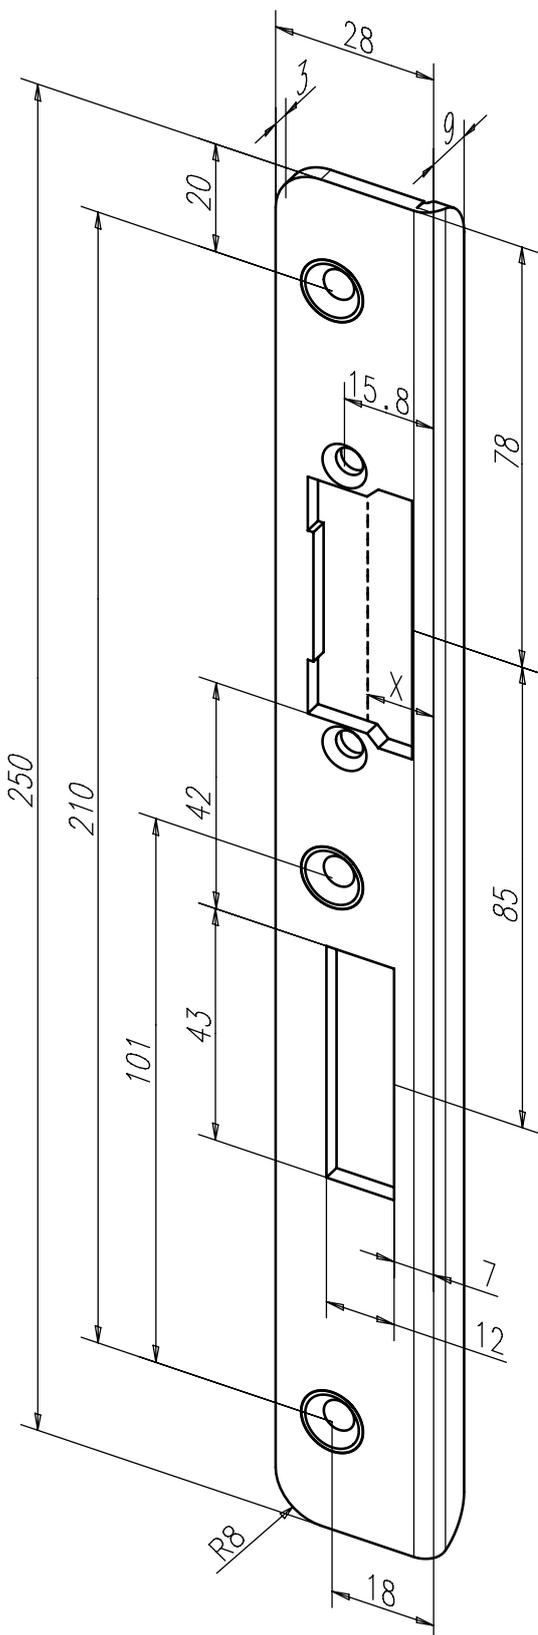


Angled Striking Plate no. 63B

ProFix® 2

Angled striking plate with dead bolt cut-out.

The advantages at a glance

- Slim-fit outer dimensions
- With dead bolt cut-out
- Suitable for standard-compliant steel frames

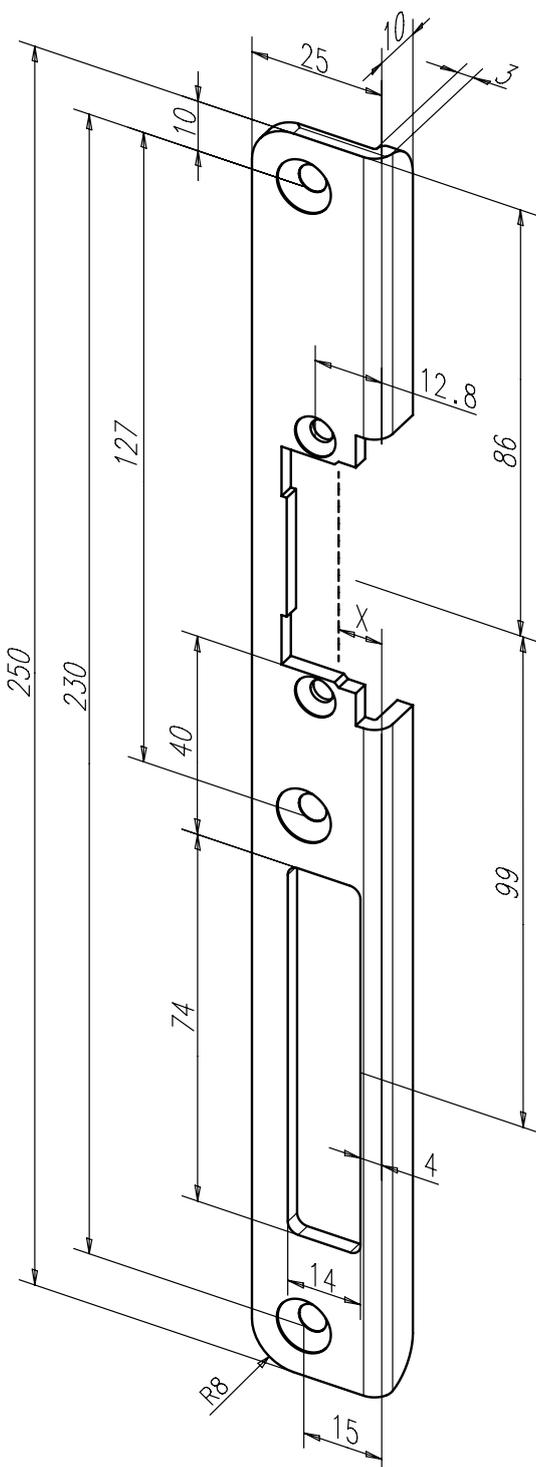

Technical attributes

Length	250 mm
Width	25 mm
Thickness	3 mm
x measurement	4.5 - 7.5 mm
Shank dimension 1	25 mm
Shank dimension 2	10 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----63B35-04
35 Stainless steel	5 Right-hand	-----63B35-05

Compatible electric strike models

- 118.14
- 118.24
- 118S.14
- 118S.24
- 118F.14
- 118F.24

Angled Striking Plate no. 78A

ProFix® 2

Angled striking plate with dead bolt cut-out.

The advantages at a glance


- Slim-fit outer dimensions
- Supply includes bolt pocket
- With dead bolt cut-out
- Suitable for standard-compliant steel frames and for wooden frames

Technical attributes	
Length	250 mm
Width	22 mm
Thickness	2,5 mm
x measurement	4.0 - 7.0 mm
Shank dimension 1	22 mm
Shank dimension 2	10 mm
Dead bolt cutout	Yes


Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----78A35-04
35 Stainless steel	5 Right-hand	-----78A35-05

Compatible electric strike models

- 118.14
- 118.24
- 118S.14
- 118S.24
- 118F.14
- 118F.24

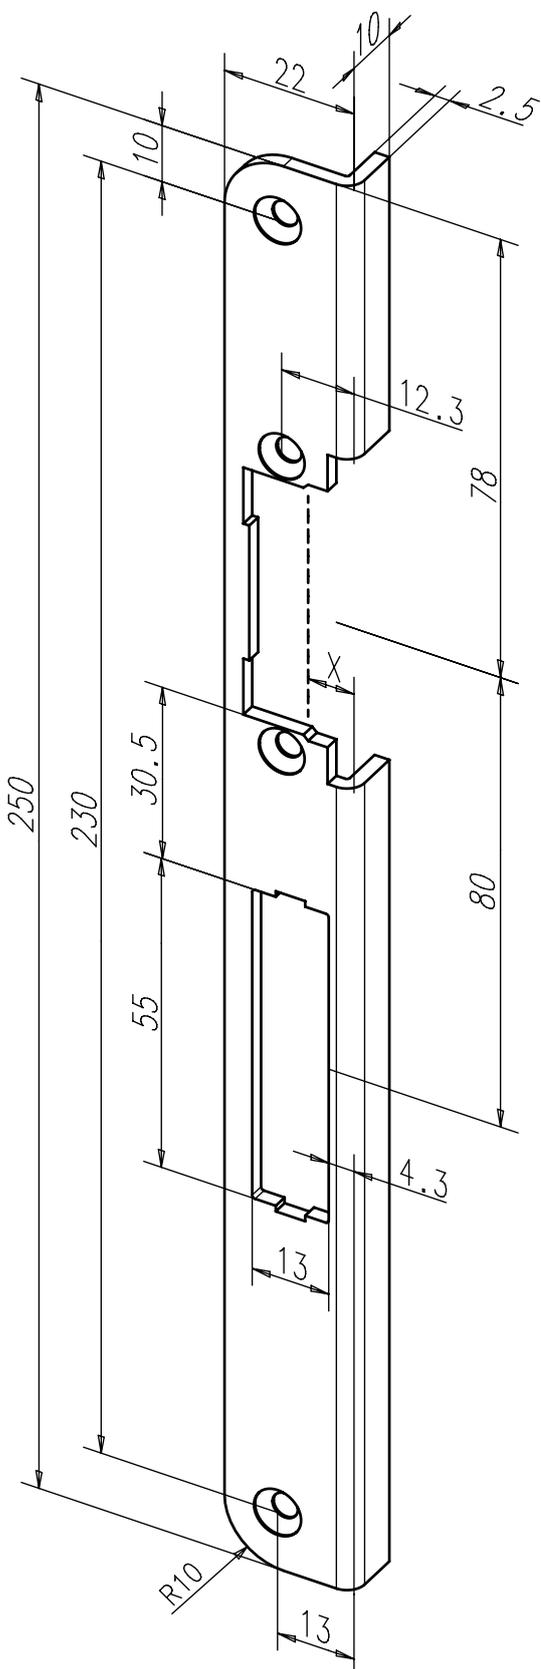

Flat Striking Plate no. 021

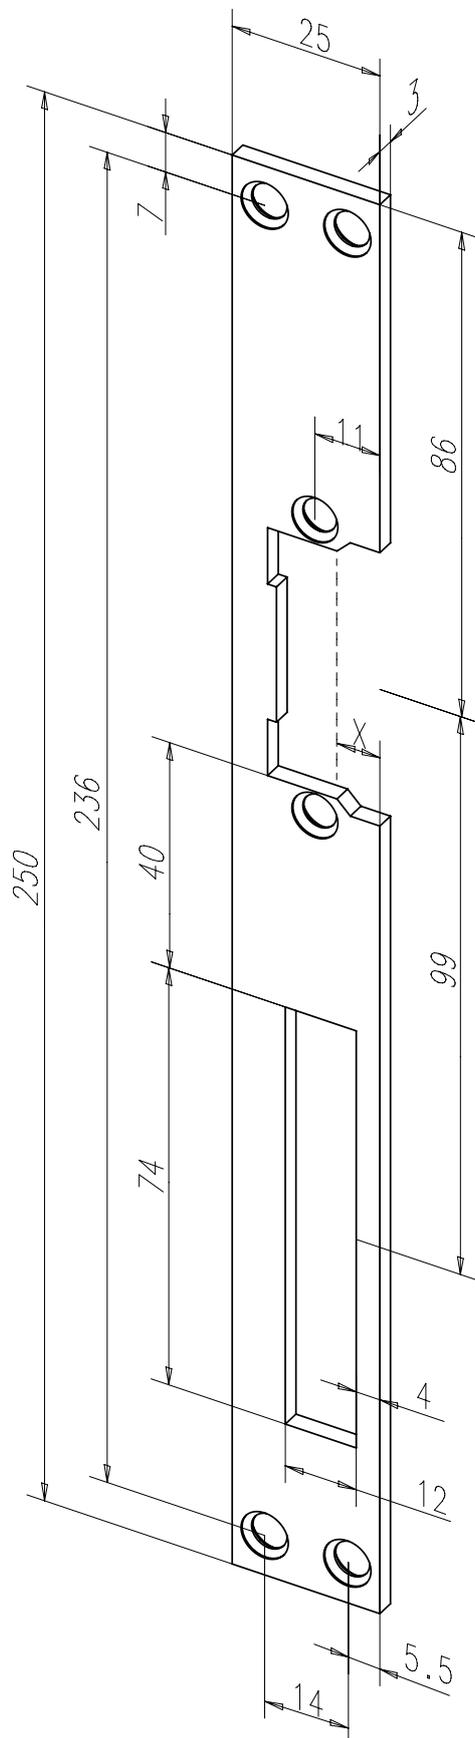

Standard flat striking plate with latch bolt aperture and dead bolt cutout.

The advantages at a glance

- DIN left and right usable

Technical attributes	
Length	250 mm
Width	25 mm
Thickness	3 mm
Dead bolt cutout	Yes


Finish	DIN direction	Order no.
01 Ducat gold	1 Universal	-----02101-01
02 Dusty grey	1 Universal	-----02102-01
04 white	1 Universal	-----02104-01
■ 35 Stainless steel	1 Universal	-----02135-01
40 Smoothed, galva-nised	1 Universal	-----02140-01

Compatible electric strike models

- 118
- 118E
- 118RR
- 118S
- 118F

Flat Striking Plate no. 82B

ProFix® 2

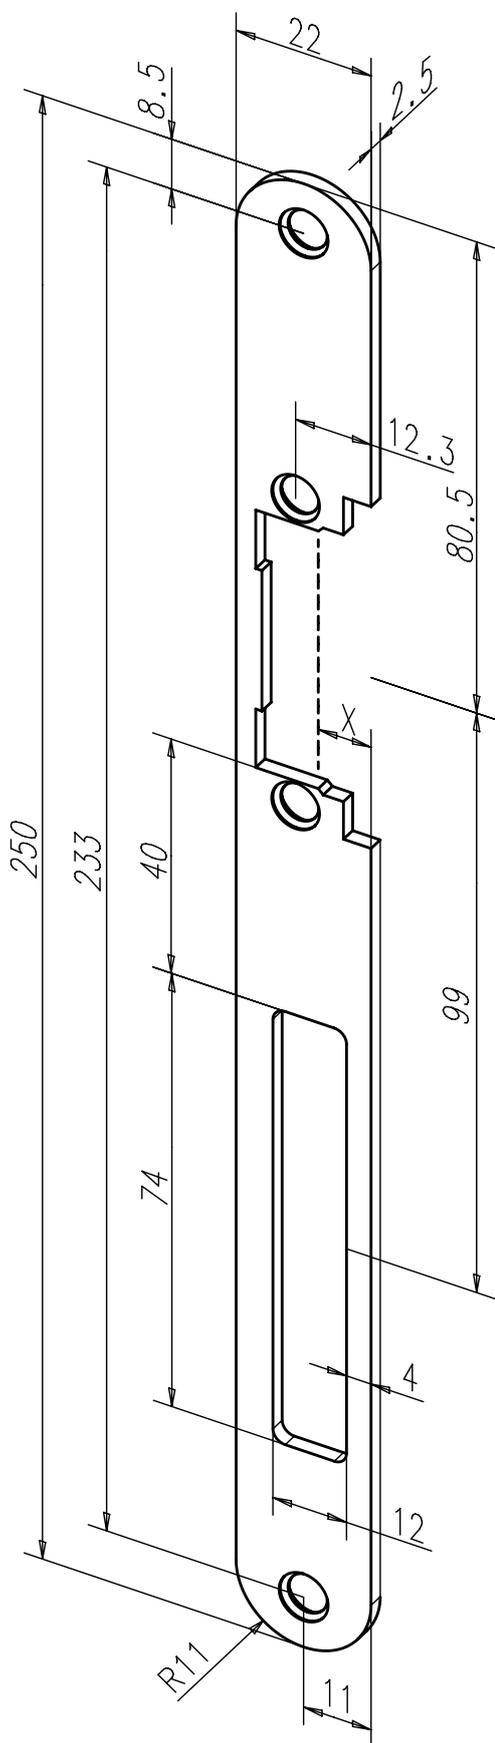

Flat striking plate with dead bolt cut-out.

The advantages at a glance

- With dead bolt cut-out
- Suitable for left and right handed doors

Technical attributes

Length	250 mm
Width	22 mm
Thickness	2,5 mm
x measurement	4.0 - 7.0 mm
Dead bolt cutout	Yes


Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----82B35-01

Compatible electric strike models

- 118.14
- 118.24
- 118S.14
- 118S.24
- 118F.14
- 118F.24

Flat Striking Plate no. 690

ProFix® 2

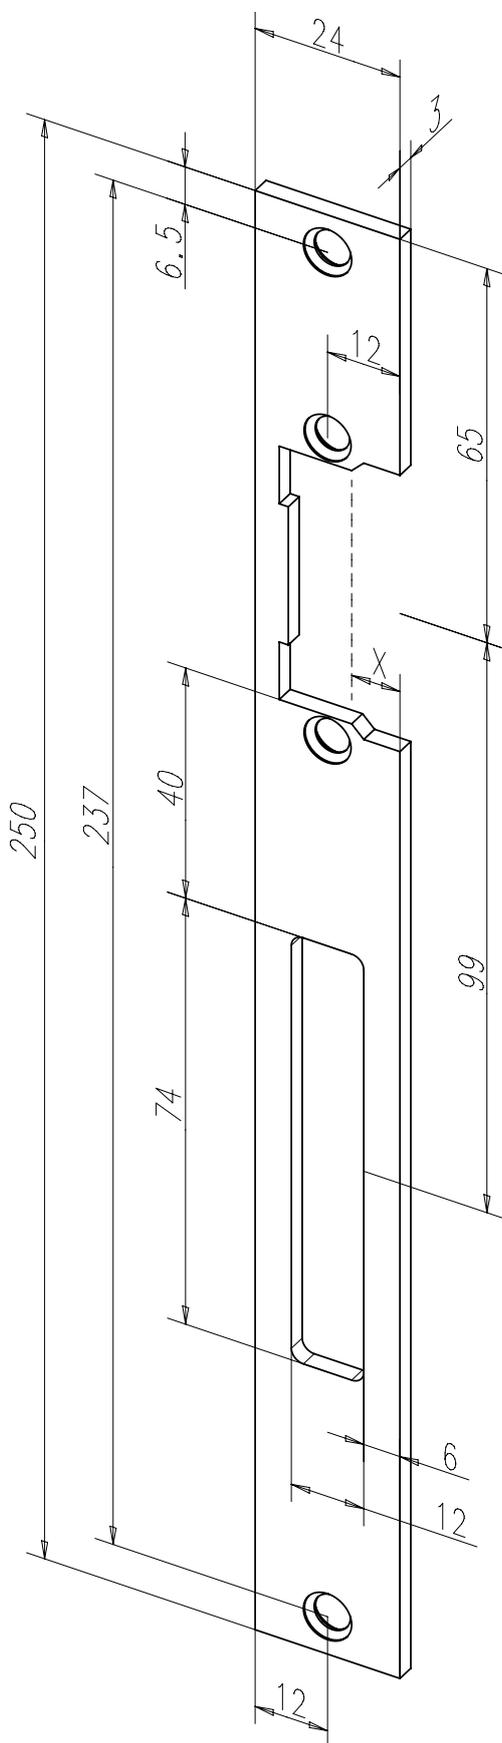

Flat striking plate with latch bolt aperture.

The advantages at a glance

- With dead bolt cut-out
- Suitable for left and right handed doors

Technical attributes

Length	250 mm
Width	24 mm
Thickness	3 mm
x measurement	3,7 - 6,7 mm
Dead bolt cutout	Yes


Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----69035-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

Flat Striking Plate no. 60B

ProFix® 2

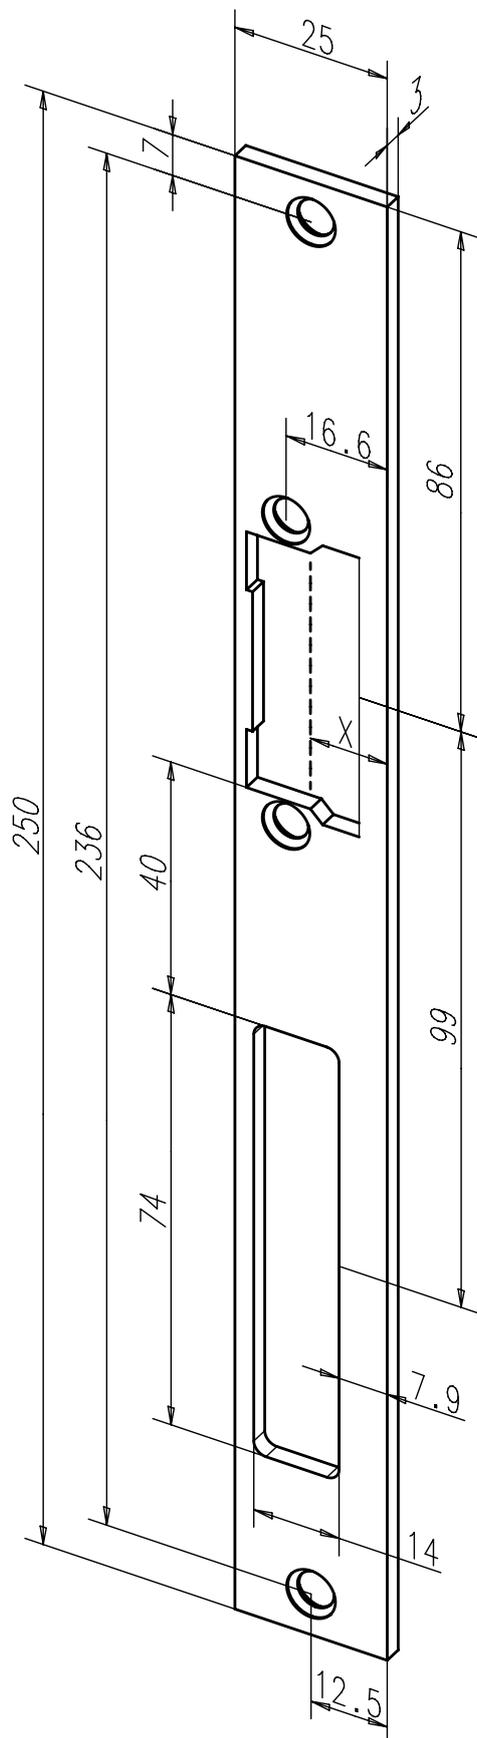

Flat striking plate with dead bolt cut-out.

The advantages at a glance

- With dead bolt cut-out
- Suitable for left and right handed doors

Technical attributes

Length	250 mm
Width	25 mm
Thickness	3 mm
x measurement	8.3 - 11.3 mm
Dead bolt cutout	Yes


Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----60B35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

Flat Striking Plate no. 94A

ProFix® 2

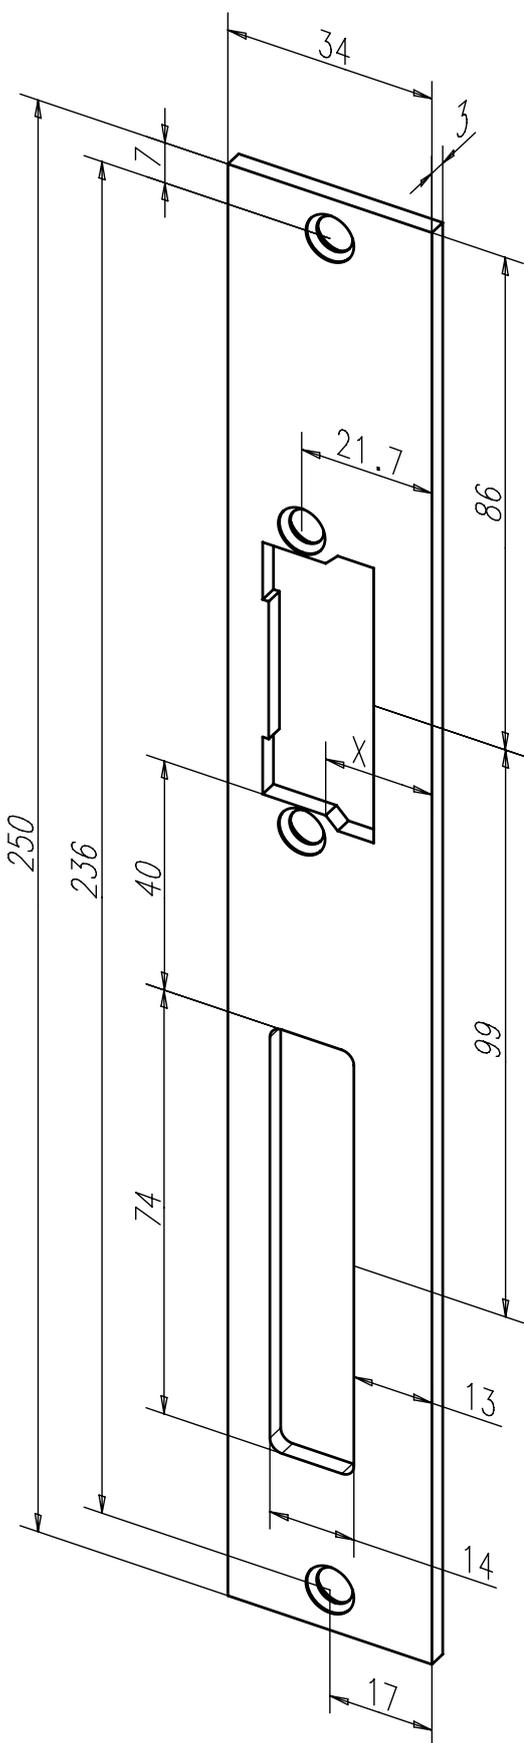

Flat striking plate with dead bolt cut-out.

The advantages at a glance

- With dead bolt cut-out
- Suitable for left and right handed doors

Technical attributes

Length	250 mm
Width	34 mm
Thickness	3 mm
x measurement	13.4 - 16.4 mm
Dead bolt cutout	Yes


Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----94A35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

Flat Striking Plate no. 95A

ProFix® 2

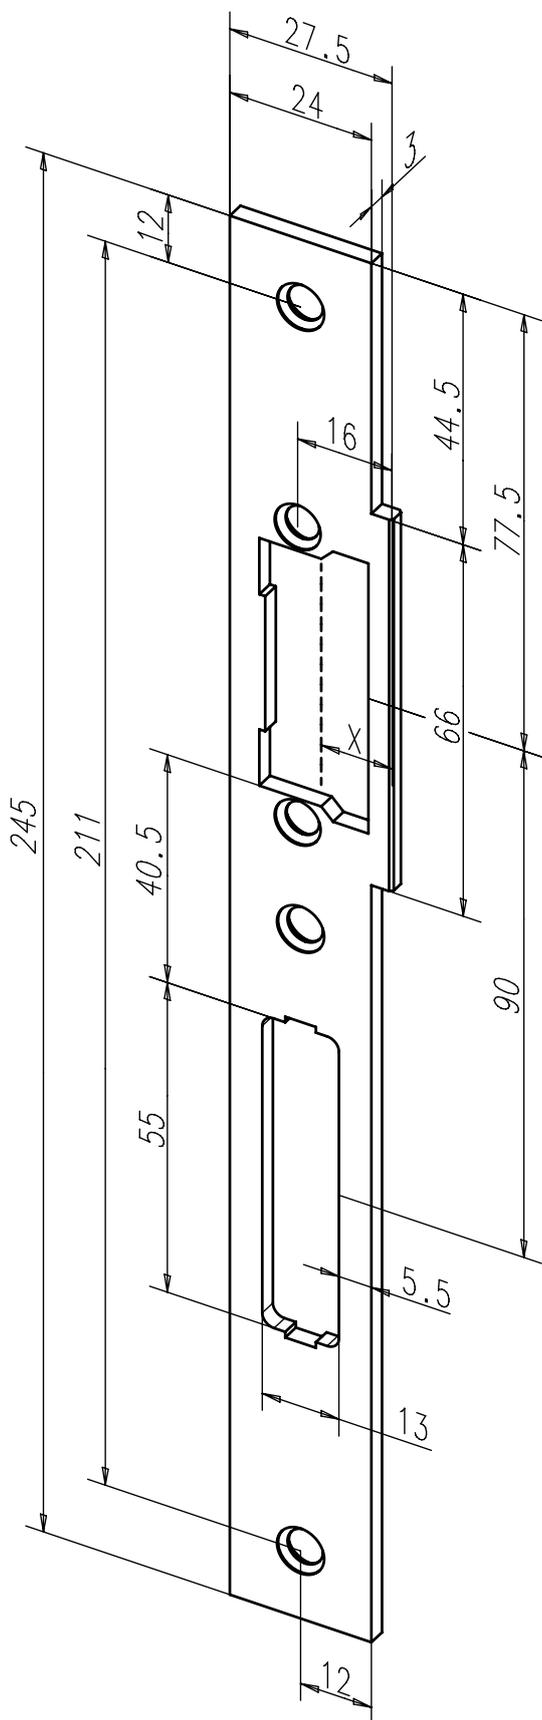

Flat striking plate with dead bolt cut-out.

The advantages at a glance

- With dead bolt cut-out
- Suitable for left and right handed doors

Technical attributes

Length	250 mm
Width	27.5 mm
Thickness	3 mm
x measurement	7.7 - 10.7 mm
Dead bolt cutout	Yes

Finish

DIN direction

Order no.

35 Stainless steel	1 Universal	-----95A35-01
--------------------	-------------	---------------

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

Flat Striking Plate no. 26B

ProFix® 2

Flat striking plate, offset, with dead bolt cut-out.

The advantages at a glance


- Offset design as alternative to U-shaped striking plate
- With dead bolt cut-out

Technical attributes	
Length	235 mm
Width	29 mm
Thickness/height	3 mm / 6 mm
x measurement	5.7 - 8.7 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----26B35-04
35 Stainless steel	5 Right-hand	-----26B35-05

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

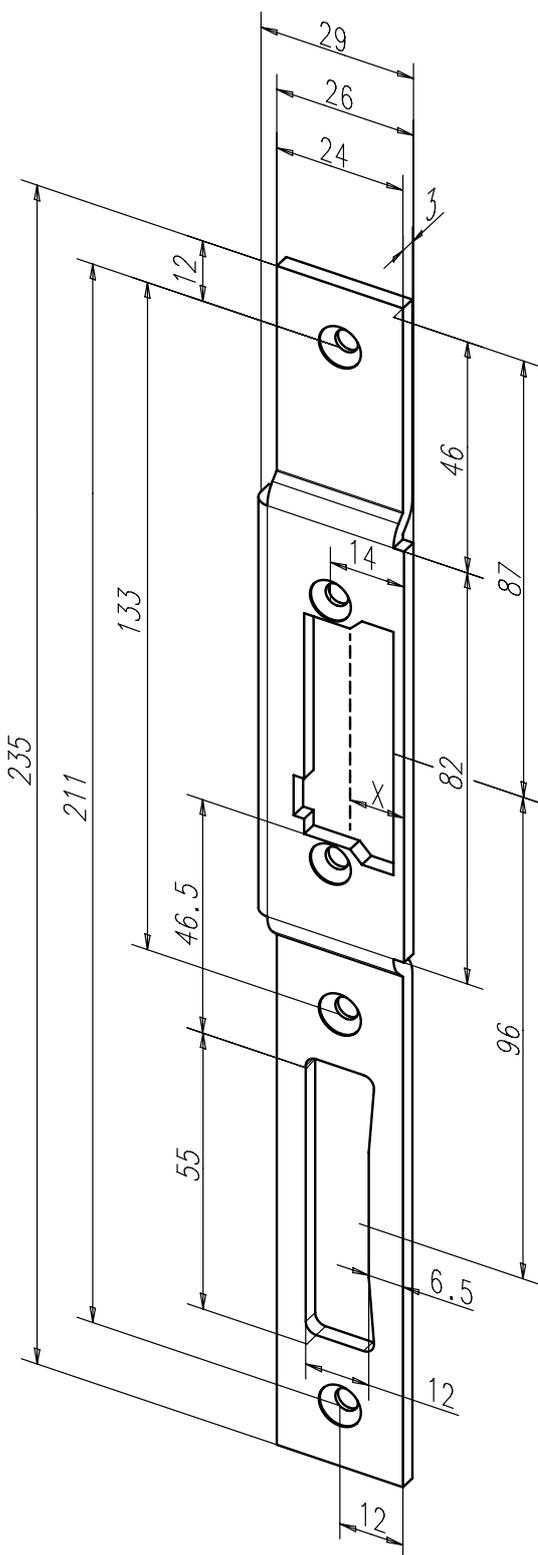

Short Flat Striking Plate no. 21C

ProFix® 2

Flat striking plate without dead bolt cutout.

The advantages at a glance


- Suitable for left and right handed doors

Technical attributes	
Length	150 mm
Width	34 mm
Thickness	3 mm
x measurement	13.4 - 16.4 mm
Dead bolt cutout	No

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----21C35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

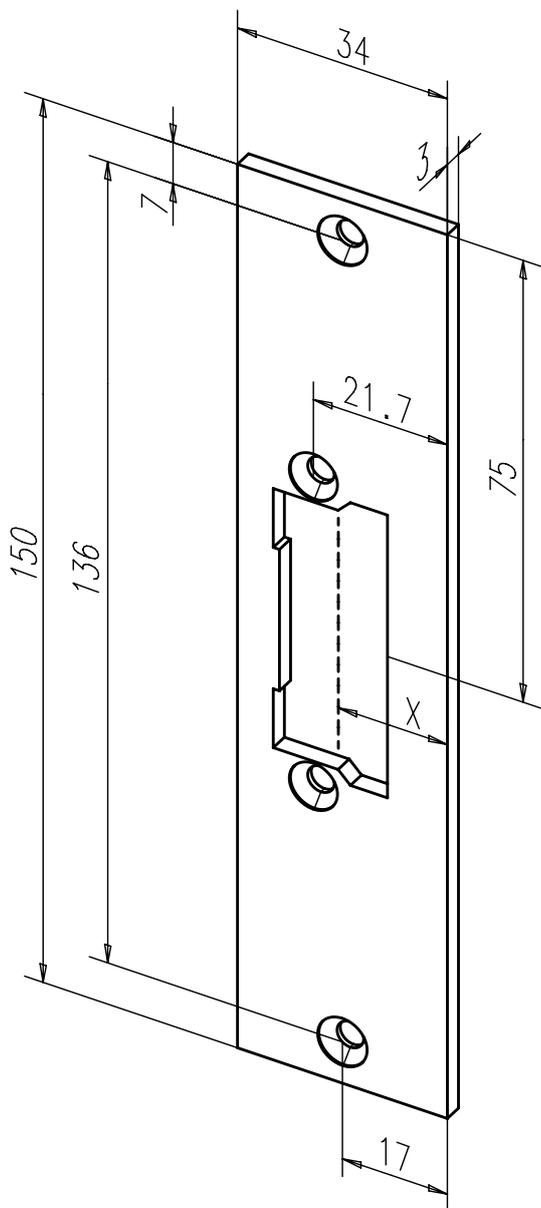

Short Flat Striking Plate no. 22C

ProFix® 2

Short flat striking plate without dead bolt cut-out.

The advantages at a glance


- Suitable for left and right handed doors

Technical attributes	
Length	165 mm
Width	34 mm
Thickness	3 mm
x measurement	13.4 - 16.4 mm
Dead bolt cutout	No

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----22C35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

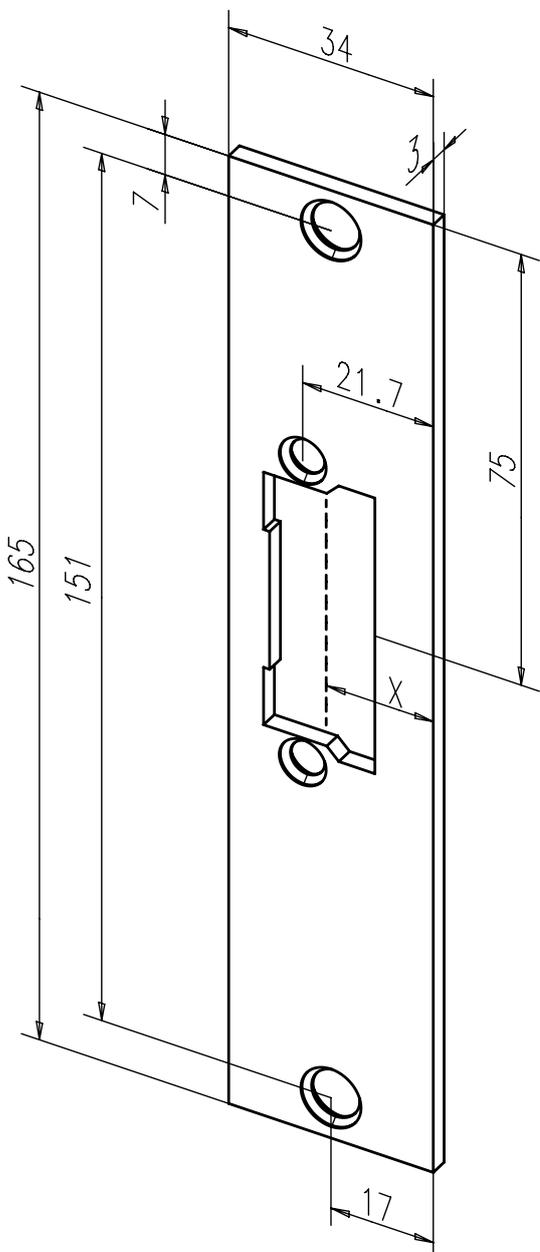

Short Flat Striking Plate no. 61B

ProFix® 2

Short flat striking plate without dead bolt cut-out.

The advantages at a glance


- DIN left and right usable

Technical attributes	
Length	110 mm
Width	25 mm
Thickness	3 mm
x measurement	8.3 - 11.3 mm
Dead bolt cutout	No

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----61B35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

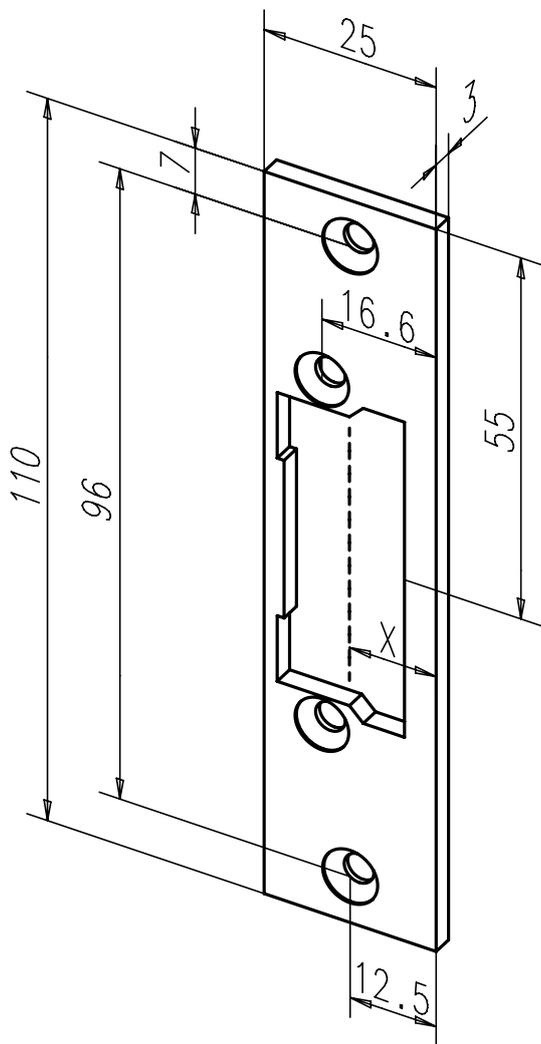

Short Flat Striking Plate no. 84B

ProFix® 2

Short flat striking plate without dead bolt cut-out.

The advantages at a glance


- Suitable for left and right handed doors

Technical attributes	
Length	110 mm
Width	28 mm
Thickness	3 mm
x measurement	8.3 - 11.3 mm
Dead bolt cutout	No

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----84B35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

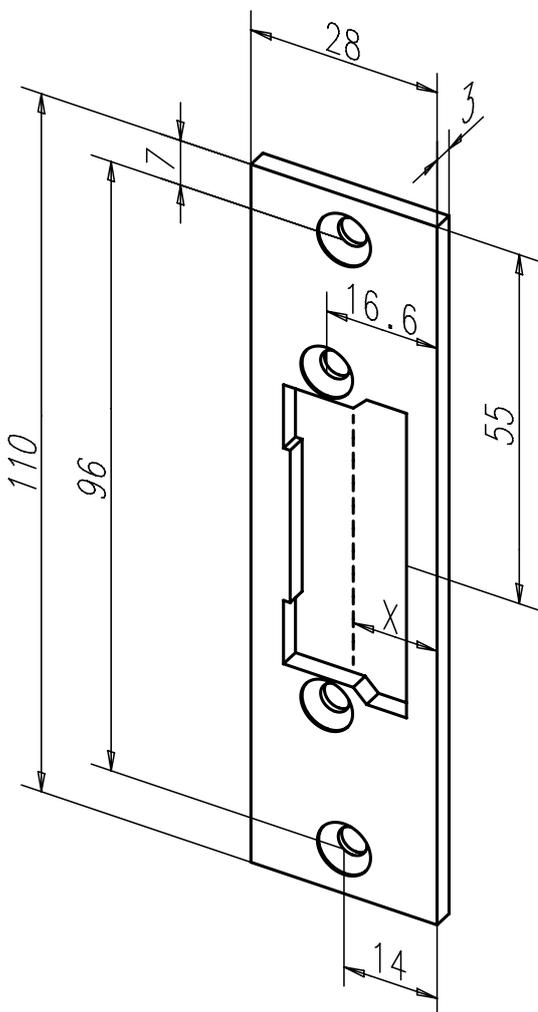

Flanged Striking Plate no. 24C

ProFix® 2

Flanged striking plate with dead bolt cut-out.

The advantages at a glance

- With dead bolt cut-out
- Suitable for left and right handed doors

Technical attributes

Length	250 mm
Width	{37,5 mm}
Thickness	3 mm
x measurement	15,2 - 18,2 mm
Dead bolt cutout	Yes

Finish


DIN direction

Order no.

35 Stainless steel	1 Universal	-----24C35-01
--------------------	-------------	---------------

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

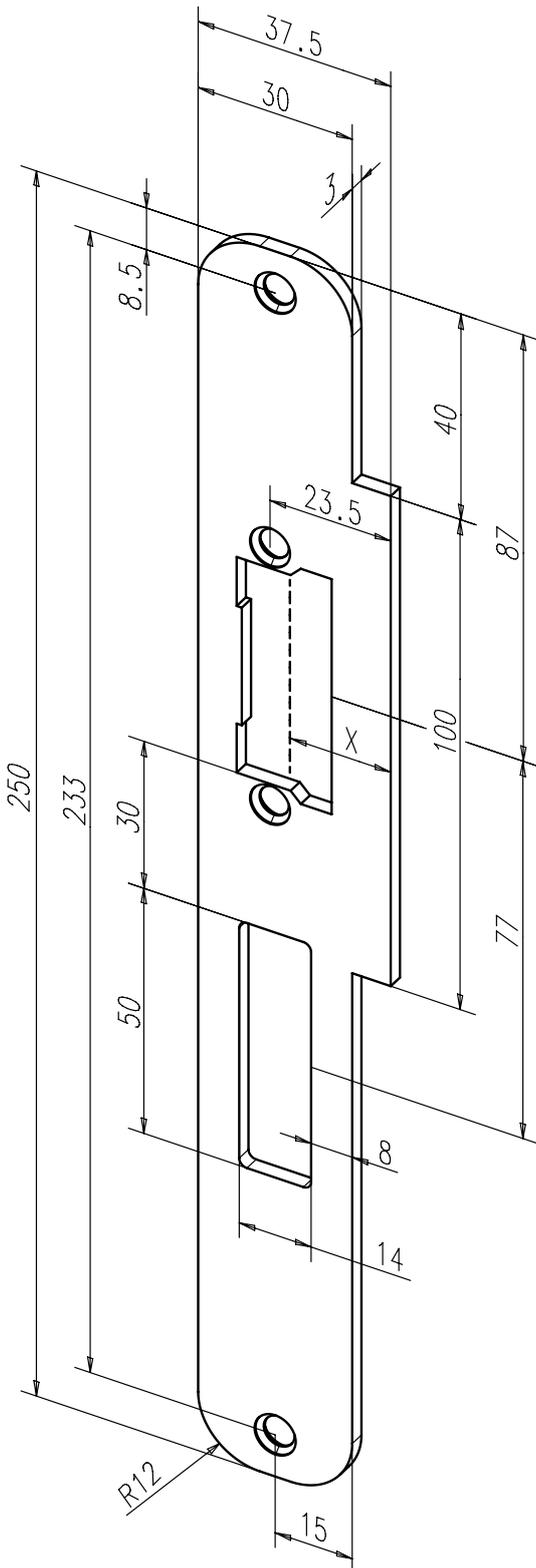

Flanged Striking Plate no. 25C

Flanged striking plate with dead bolt cut-out and drill holes for bolt switch contact 878.

The advantages at a glance

- With dead bolt cut-out
- Suitable for left and right handed doors


Technical attributes

Length	250 mm
Width	{37,5 mm}
Thickness	3 mm
x measurement	15,2 - 18,2 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----25C35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

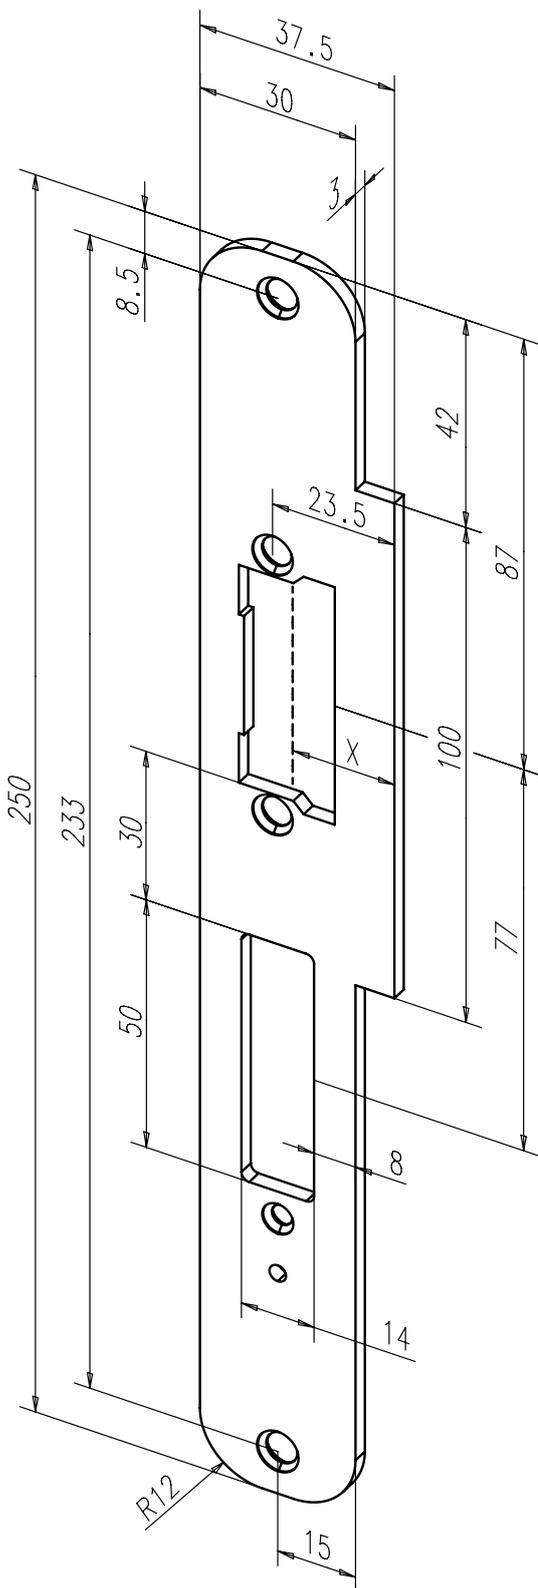

Flanged Striking Plate no. 76B

ProFix® 2

Flat striking plate with dead bolt cut-out.

The advantages at a glance

- With dead bolt cut-out
- DIN left and right usable


Technical attributes

Length	250 mm
Width	{39,8 mm}
Thickness	3 mm
x measurement	14,0 - 17,0 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----76B35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

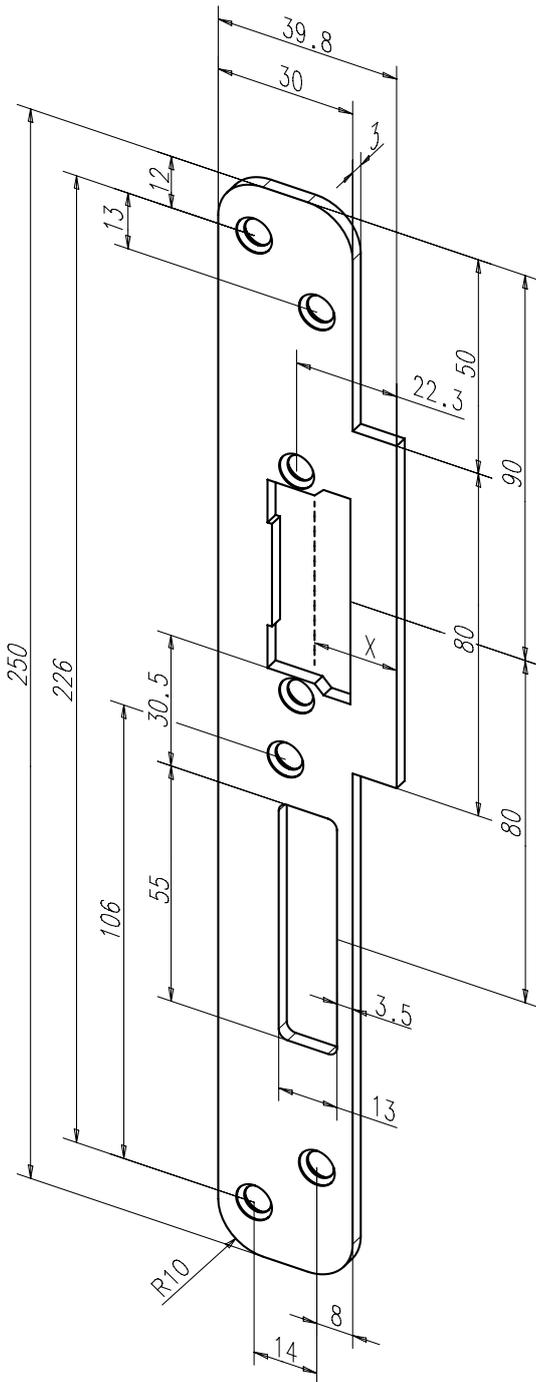

Flanged Striking Plate no. 59B

ProFix® 2

Flanged striking plate with dead bolt cut-out.

The advantages at a glance

- With dead bolt cut-out
- DIN left and right usable


Technical attributes

Length	250 mm
Width	44 mm
Thickness	3 mm
x measurement	24,3 - 27,3 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----59B35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

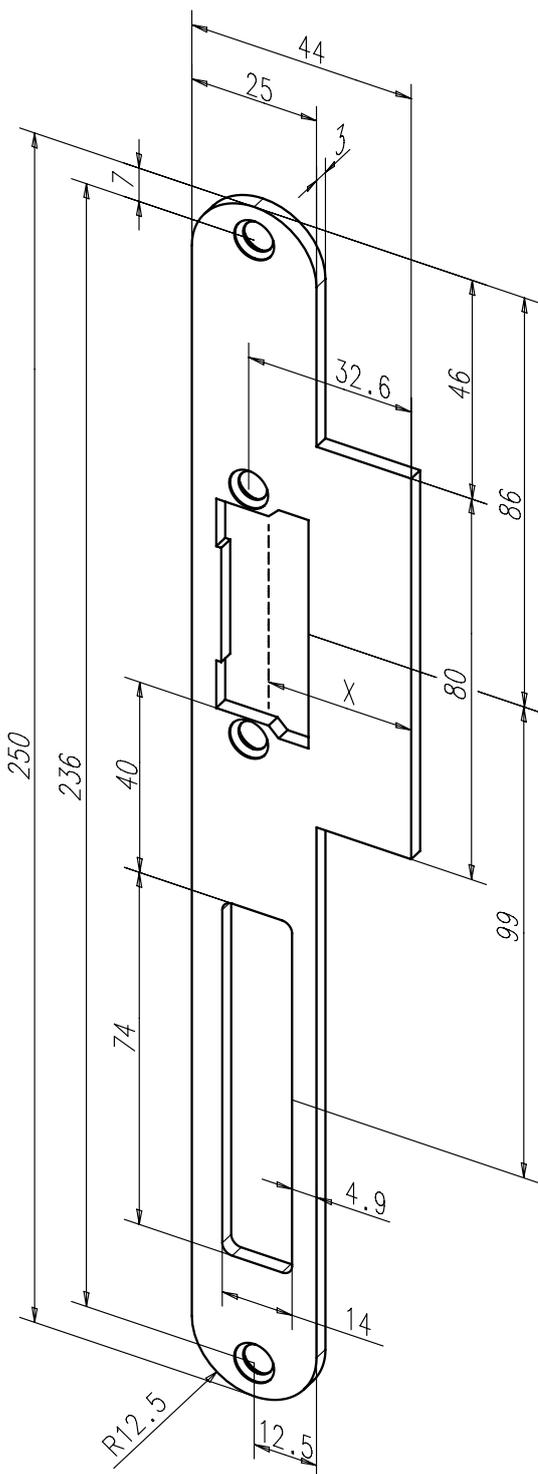

Flanged Striking Plate no. 15C

ProFix® 2

Flanged striking plate with dead bolt cut-out.

The advantages at a glance


- With dead bolt cut-out
- Suitable for left and right handed doors

Technical attributes	
Length	250 mm
Width	44 mm
Thickness	3 mm
x measurement	23,4 - 26,4 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----15C35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

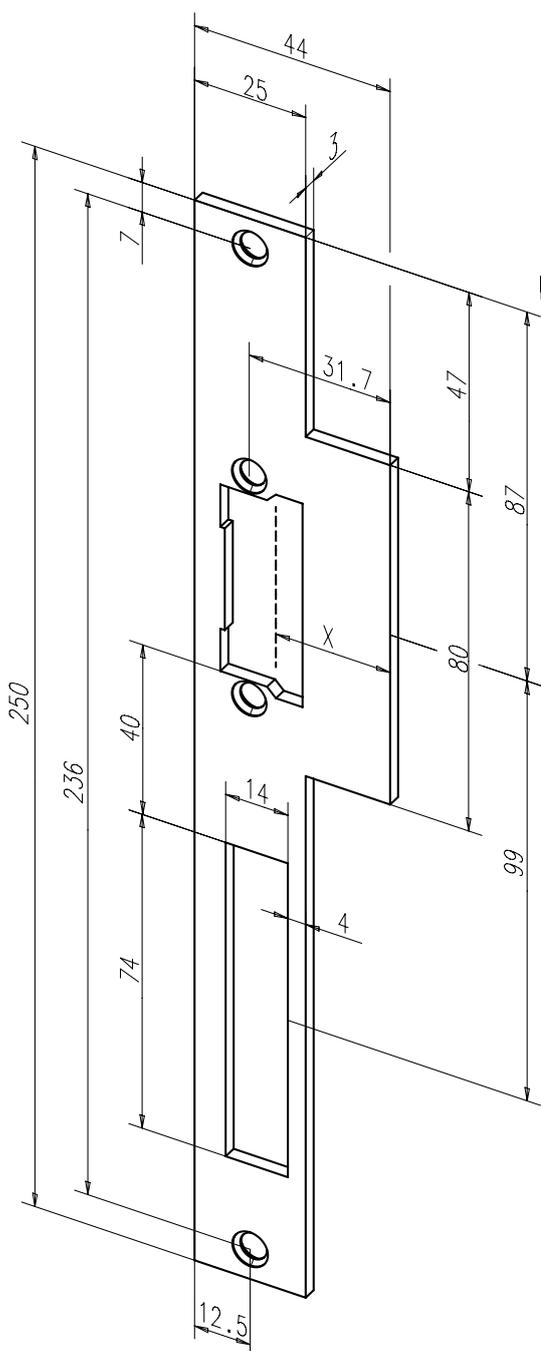

Flanged Striking Plate no. 23C

ProFix® 2

Flanged striking plate without dead bolt cutout.

The advantages at a glance


- Suitable for left and right handed doors

Technical attributes	
Length	{180 mm}
Width	36,5 mm
Thickness	3 mm
x measurement	15,8 - 18,8 mm
Dead bolt cutout	No

Finish	DIN direction	Order no.
35 Stainless steel	1 Universal	-----23C35-01

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

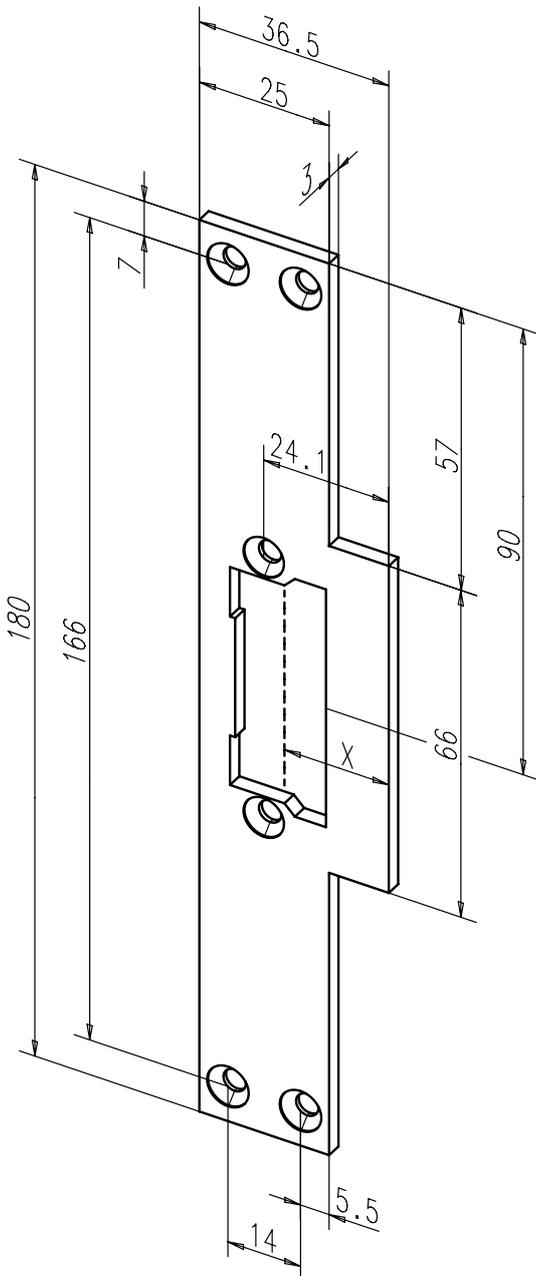

Flanged Striking Plate no. 46B

ProFix® 2

Flanged striking plate, offset with dead bolt cut-out.

The advantages at a glance


- Offset design as alternative to U-shaped striking plate
- With dead bolt cut-out

Technical attributes	
Length	235 mm
Width	49 mm
Thickness/height	3 mm / 6 mm
x measurement	28,7 - 31,7 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----46B35-04
35 Stainless steel	5 Right-hand	-----46B35-05

Compatible electric strike models

- 118.13
- 118.23
- 118S.13
- 118S.23
- 118F.13
- 118F.23

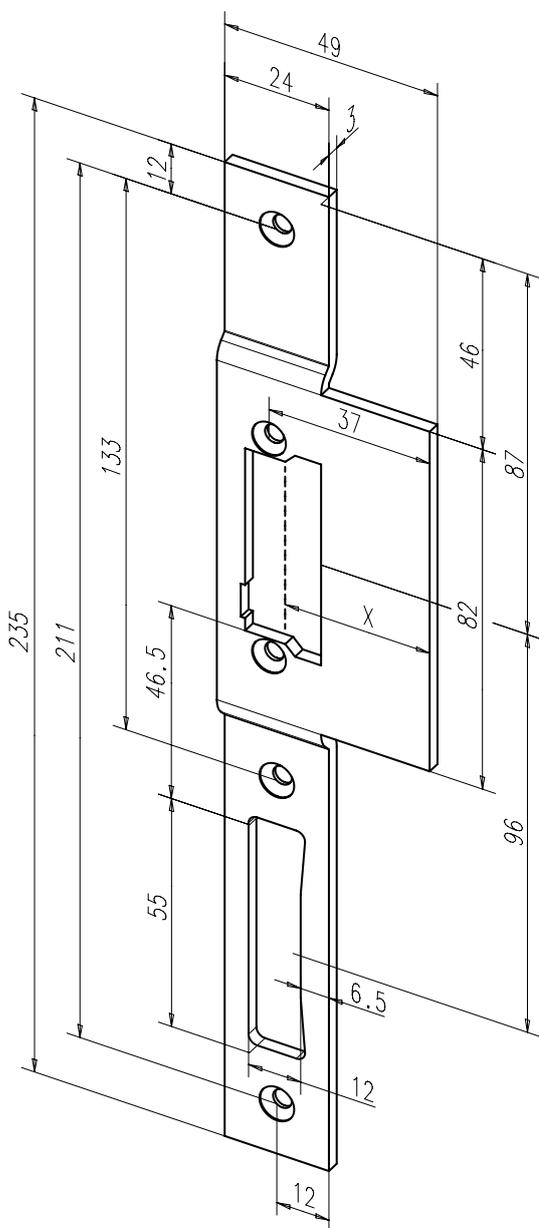

U Striking Plate no. 391

Flat striking plate with latch bolt aperture and dead bolt cutout.

The advantages at a glance


- Suitable for plastic profiles

Technical attributes	
Length	250 mm
Width	24 mm
Thickness	2 mm
Dead bolt cutout	Yes

Finish	DIN direction	Order no.
35 Stainless steel	4 Left-hand	-----39135-04
35 Stainless steel	5 Right-hand	-----39135-05

Compatible electric strike models


- 118
- 118E
- 118RR
- 118.500
- 118E.15SET (ProFix® 2 - models)

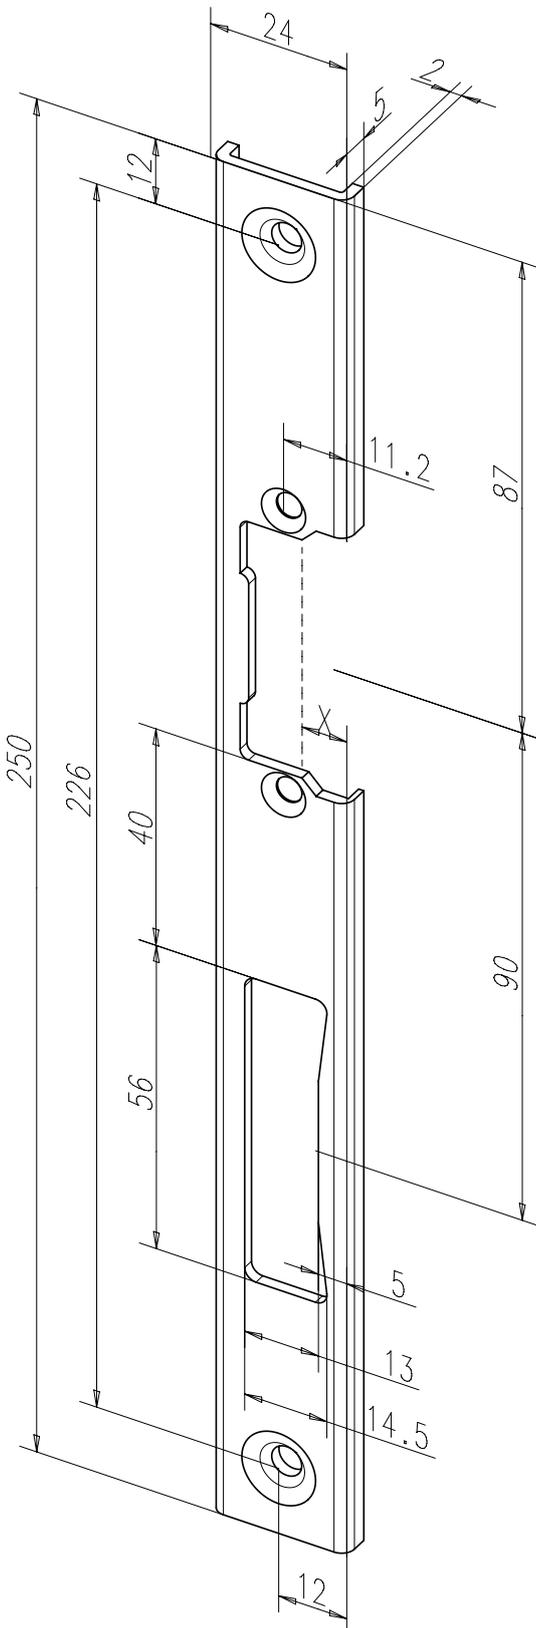



Accessories for electric strikes in
Model Range 118

Dummy component

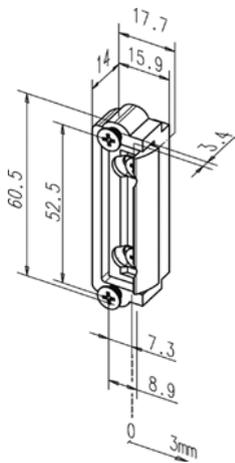


Dummy Component 1418-100

Dummy component with no electric function, with FaFix® adjustment.

Technical attributes	
Height	60.5 mm
Width	16 mm
Depth	17.4 mm

Order no.
1418-100-----00

To be pre-equipped for model series 118, 118E; not suitable for fire rated applications

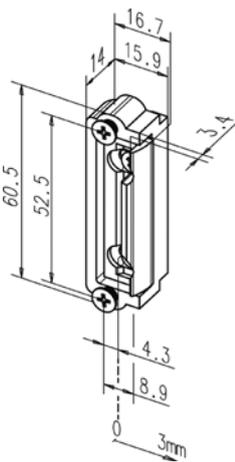


Dummy Component 1418-101

Dummy component with no electrical function; with FaFix® adjustment and 3 mm thick.

Technical attributes	
Height	60.5 mm
Width	19,5 mm
Depth	17.4 mm

Order no.
1418-101-----00

To be pre-equipped for Model Ranges 118.101, 118E101; not suitable for fire rated applications

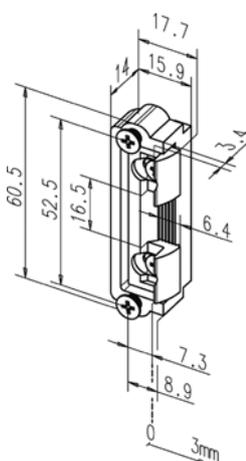

Dummy Component 1418-130


Dummy component with no electric function, with FaFix® adjustment.

Technical attributes	
Height	60.5 mm
Width	19,5 mm
Depth	17.4 mm

Order no.
1418-130-----00

To be pre-equipped for Model Ranges 118.101, 118E130; not suitable for fire rated applications

Dummy component

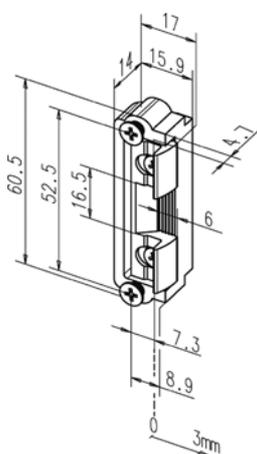


Dummy Component 1418-190

Dummy component with no electric function, with FaFix® adjustment.

Technical attributes	
Height	60.5 mm
Width	16 mm
Depth	17.4 mm

Order no.
1418-190-----00

To be pre-equipped for Model Ranges 118.190, 118E190, 118.192, 118E192; not suitable for fire rated applications

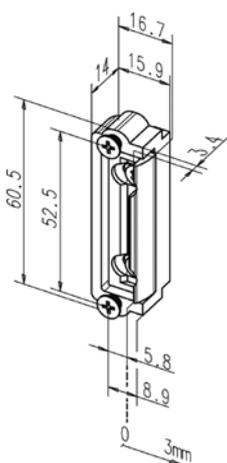


Dummy Component 1418-340

Dummy component with no electrical function; with FaFix® adjustment and 1.5 mm thick. Universally handed

Technical attributes	
Height	60.5 mm
Width	19,5 mm
Depth	17.4 mm

Order no.
1418-340-----00

To be pre-equipped for Model Ranges 118.340, 118E340; not suitable for fire rated applications

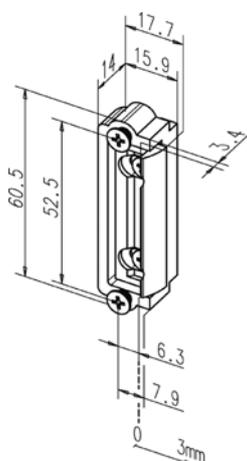

Dummy Component 1418-500


Dummy component with no electric function, with FaFix® adjustment.

Technical attributes	
Height	60.5 mm
Width	19,5 mm
Depth	17.4 mm

Order no.
1418-500-----00

To be pre-equipped for model series 118.500, 118E500; not suitable for fire rated applications

Dummy component

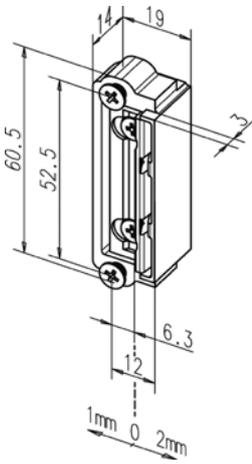

Dummy Component 1418-13 ProFix® 2

Dummy component with no electric function, with FaFix® adjustment. Universally handed.


Technical attributes

Height	60.5 mm
Width	19 mm
Depth	17 mm

Order no.

1418-13-----00

To be pre-equipped for Model Ranges 118.13, 118E.13; not suitable for fire rated applications

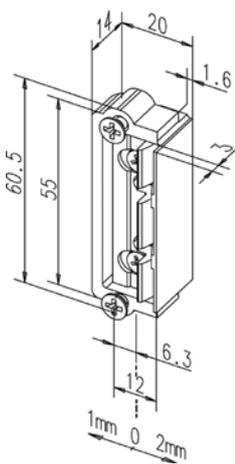

Dummy Component 1410-20 ProFix® 2

Universally handed. Dummy component with no electric function, with FaFix® adjustment. Brass surface-mounted attachment

Technical attributes


Height	60.5 mm
Width	20 mm
Depth	17 mm

Order no.

1410-20-----00

To be pre-equipped for Model Ranges 118.13, 118E.13, 118S.13; not suitable for fire rated applications

Dummy component for fire doors

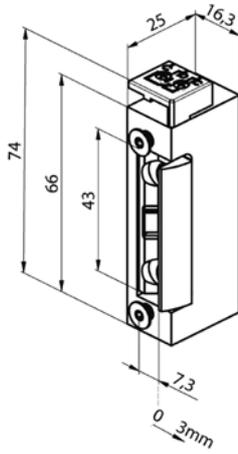

Dummy component 1410-F

Dummy component with no electric function, with FaFix® adjustment. Universally handed.


Technical attributes

Height	74 mm
Width	16.3 mm
Depth	25 mm

Order no.

1410-F-----00

To be pre-equipped for model series 118F; suitable for fire rated applications
Test certificate number: P-120003624

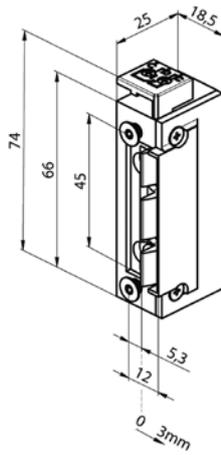

Dummy component 1410-F2 ProFix 2

Dummy component with no electric function, with FaFix® adjustment. Universally handed.

Technical attributes

Height	74 mm
Width	20,1 mm
Depth	25 mm

Order no.

1410-F2-----00

To be pre-equipped for model series 118F.13; suitable for fire rated applications
Test certificate number: P-120003624



Plug-in connecting cable model 760
Connecting cable for electric strike 118.

Technical attributes	
Connecting cable	2-wire

Feature	Order no.
1,5 m connection lead	7 6 0 - 1 5 0 - - - - - 0 0
2,5 m connection lead	7 6 0 - 2 5 0 - - - - - 0 0
4,5 m connection lead	7 6 0 - 4 5 0 - - - - - 0 0



Connecting cable harness
For triple door strike lock model series 118.

Technical attributes	
Connecting cable	2-wire

Feature	Order no.
3 m connecting cable	7 6 0 - 3 M S - - - - - 0 0
5 m connecting cable	7 6 0 - 5 M S - - - - - 0 0



Connecting piece
1 mm thick, for strike plates thinner than 2.5 mm

Order no.
118.7000054--35






Pre-Load Electronic Assembly 760-12
Improves pre-load capability to at least 300N for DC operation. A short buzzing sound is audible in the electric strike for about 0.5 seconds. Continuous current-resistant, holding current is reduced. Compatible with standard effeff electric strikes



Technical attributes	
Connecting cable	2-wire

Feature	Order no.
12 V DC / 24 V DC	7 6 0 - 1 2 - - - - - 0 0



Surface-mounted attachments for model 118

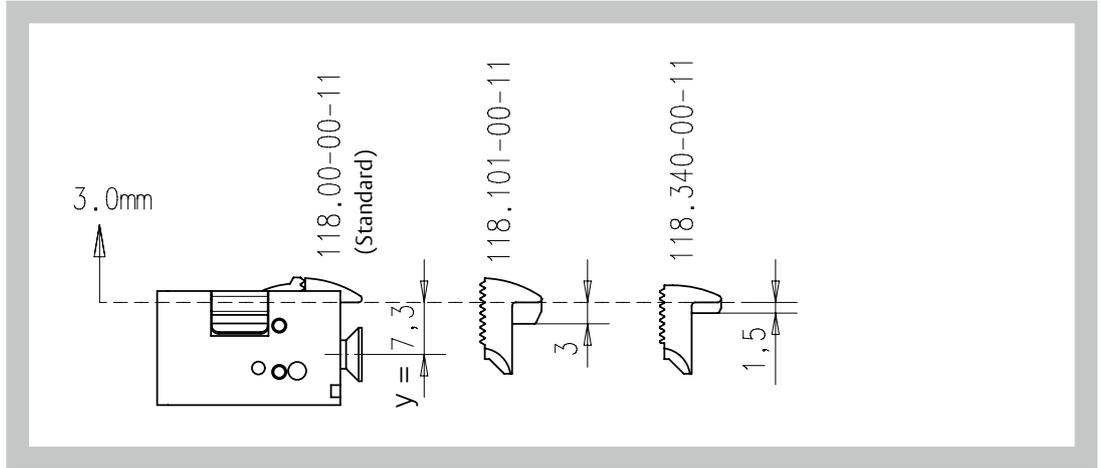



$y = 5,8 + 3 \text{ mm}$





$y = 5,8 + 3 \text{ mm}$





$y = 4,3 + 3 \text{ mm}$



$y = 7,3 + 3 \text{ mm}$



$y = 10,3 + 3 \text{ mm}$



$y = 6,3 + 3 \text{ mm}$

Unrestricted public access despite locked door

Automatic Door Control Model 750



For premises such as doctor and lawyer practices

During visiting hours, the automatic control system operates electric strike release. When the system is engaged, the visitor rings the door bell and activates the automatic system in the electric strike control device. This releases the door for 1 to 10 seconds after the preset delay of between 1 to 20 seconds, enabling the visitor to enter. The door is then locked again as it closes. When the system is switched off, the electric strike is in normal mode.

The automatic electric strike control can be installed in all electric strike systems with effeff electric strikes (series 1 models).

Please note:

The overall system requires a minimum operating voltage of 8 V.

To ensure the system functions reliably over longer cable paths and small cable cross-sections, we recommend using transformers with a 12 V output voltage.

Electric strike voltage rating and voltage feed (transformer voltage) must match.

Electric strike models with the following order specifications can be used:

Series 1 models (fail-locked):

6-12 V order specification D1

8-16 V order specification R1

10-24 V order specification A7

12 V elec. unlocking order specification E3


Do not use series 2 models (hold-open function)

Do not use series 3 models (fail-unlocked)


Installation:

Surface-mount installation or fit onto standard rail (distributor installation)

Automatic electric strike control device

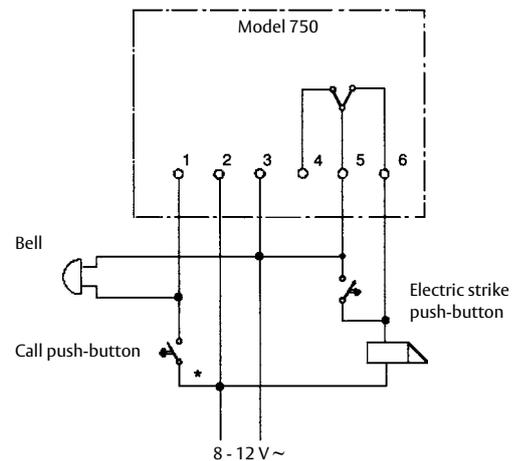

Automatic electric strike control device with intercom system

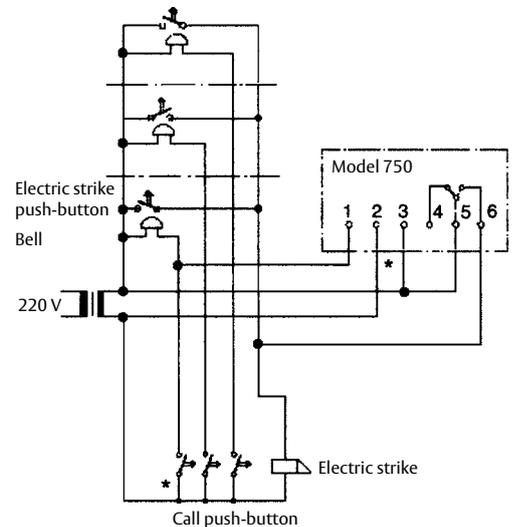

Important!

Use same potential for call push-button wire and terminal 2

Unrestricted public access despite locked door

Switchover device model 7410-10



For commercial buildings, offices, medical practices, schools and large apartment buildings

The entrance door is permanently unlocked automatically at certain times during the day, enabling visitors to come and go as they wish. The system is controlled by a timer switch. The electric strike is permanently unlocked by a continuous current at the times set on the time switch (DC operation, electric strike makes no buzzing sound). Outside these set times, the electric strike operates as normal, i.e. electric strike released via the electric strike button in the apartment.

(AC operation, electric strike makes no buzzing sound)

A complete system consists of the following individual components:

Electric strike with electric unlocking (only series 1 models), switchover device, timer switch, transformer-rectifier device, electric strike push-button.


Electric strike:

Always use a special electric strike model (series 1 models only, except model 17, 116), order with extra electric unlocking option (E3, F3), so the strike will be supplied with special spools for continuous energising.


Installation:

Plastic casing for surface-mount installation, or fit onto standard rail (distributor installation)

Diagram of Functions

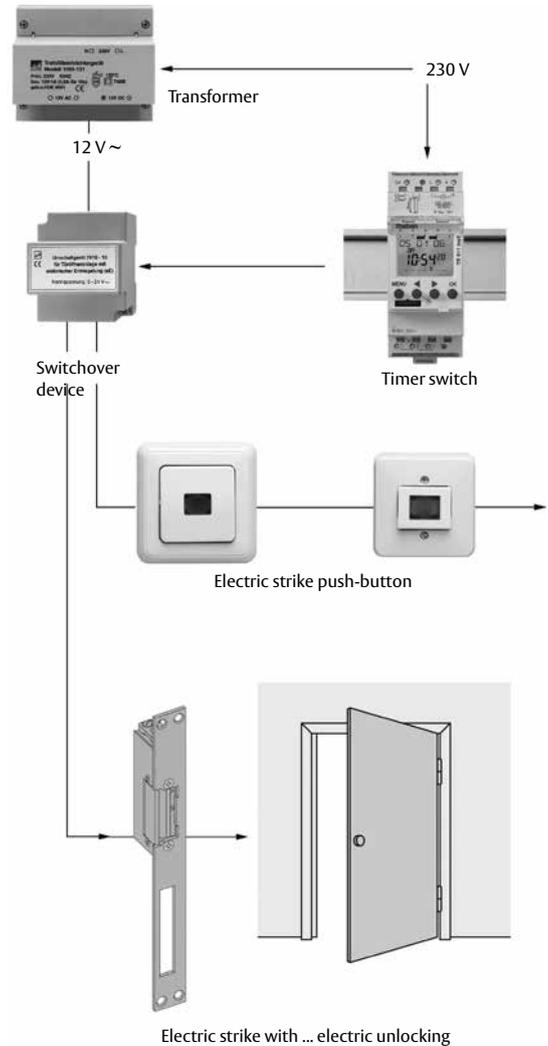

Circuit diagram for electric strike system with automatic electric unlocking controlled via timer switch

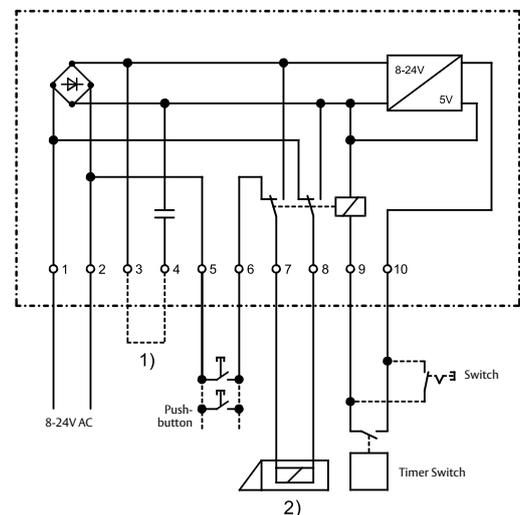

1) Warning: A bridge must be installed between terminals 3 and 4 for an 8V input voltage.

2) Electric strike (fail-locked) with electric unlocking (rated voltage according to connection voltage) Contact rating for relay contacts: 1A

Control unit / relay / switchover device



Automatic door strike control model 750

Automatic electric strike control to ensure unrestricted public access despite locked door. For premises such as doctor and lawyer practices

Technical attributes	
Mounting method	Surface-mounted/distributor installation
Adjustable waiting time	Approx. 1 to 20 sec
Electric strike release time	Approx. 1 to 10 sec
Height	98 mm
Width	88 mm
Depth	63 mm
Supply voltage	8 - 12 V AC

Feature	Order no.
Automatic door strike control	7 5 0 - - - - - 0 0



Time-delay relay model 770

A simple and very practical way to keep the door strike unlocked at set times.

Technical attributes	
Mounting method	Surface-mounted/distributor installation
Period	0,25-1023 sec.
Height	98 mm
Width	88 mm
Depth	63 mm
Max. contact rating	24 V / 1 A

Feature	Order no.
12 V AC/DC rated operating voltage	7 7 0 - 1 0 - - - - - E 1 0
24 V AC/DC rated operating voltage	7 7 0 - 1 0 - - - - - F 1 0



Relay control model 7421

Relay control in plastic casing for surface and top hat rail mounting (distributor installation). It consists of two relays with two potential-free change-over contacts and recovery diodes each.

Technical attributes	
Mounting method	Surface-mounted/distributor installation
Switching voltage	230 V AC max.
Switching current	2 A max.

Feature	Order no.
12 V DC rated operating voltage	7 4 2 1 - 1 2 - - - - - 0 0
24 V DC rated operating voltage	7 4 2 1 - 2 4 - - - - - 0 0

Power supply



Rectifier Units 1001

Transformers with integrated rectifiers and power adapters for electric strikes, door bolts, motorized bolts, holding magnets, access control systems and door control systems.

Suitable for operating electric strikes with an alternating voltage which produces a buzzing sound in the electric strike.

Technical attributes	
Mounting method	Surface-mounted / top hat rail
Height	73 mm
Width	70 mm
Length	106 mm
Overload protection	thermal circuit breaker
Operating temperature range	0 to +40 °C
Class of protection	IP 20
Protection rating	II/Insulation protection
Rated operating voltage primary	230 V AC
Rated operating voltage secondary	{12 oder 24 V DC nicht stabilisiert, nicht geglättet}
Input operating voltage	230 V AC
Rated current consumption	1 A max., 1,5 A for 10 s

Feature	Order no.
Supply voltage 12 V AC/DC	1 0 0 1 - 1 2 - 1 - - - - 0 0
Supply voltage 24 V AC/DC	1 0 0 1 - 2 4 - 1 - - - - 0 0



Power supply device model 1003 12 V

There is a suitable power supply unit for each type of use. The individual power supply units stand out due to their constant output voltage during fluctuations in mains voltage and load alternation.

Technical attributes	
Mounting method	Surface-mounted / top hat rail
Overload protection	Electronic
Operating temperature range	-5 °C to +40 °C
Class of protection	IP 00
Protection rating	II/Insulation protection
Housing	Plastic
Casing colour	RAL 7035
Input operating voltage	100-240 V AC
Output voltage	12 V DC (regulated)

Feature	Order no.
0,8 A, (H/W/L) 68/92/17,5 mm	1 0 0 3 - 1 2 - 0 , 8 - - 1 0
1,25 A, (H/W/L) 68,5/93/35 mm	1 0 0 3 - 1 2 - 1 , 2 5 - 1 0
2 A, (H/W/L) 68,5/93/52,5 mm	1 0 0 3 - 1 2 - 2 - - - - 1 0
4 A, (H/W/L) 66,5/93/140 mm	1 0 0 3 - 1 2 - 4 - - - - 1 0



Power supply device model 1003 24 V

There is a suitable power supply unit for each type of use. The individual power supply units stand out due to their constant output voltage during fluctuations in mains voltage and load alternation.

Technical attributes	
Mounting method	Surface-mounted / top hat rail
Overload protection	Electronic
Operating temperature range	-5 °C to +40 °C
Class of protection	IP 00
Protection rating	II/Insulation protection
Housing	Plastic
Casing colour	RAL 7035
Input operating voltage	100-240 V AC
Output voltage	24 V DC (regulated)

Feature	Order no.
0,4 A, (H/W/L) 68/92/17,5 mm	1 0 0 3 - 2 4 - 0 , 4 - - 1 0
1 A, dim.: (W/L/H) 94x36x68 mm	1 0 0 3 - 2 4 - 1 - - - - 1 0
2 A, dim.: (W/L/H) 92x70x68 mm	1 0 0 3 - 2 4 - 2 - - - - 1 0
4 A, dim.: (W/L/H) 92x70x68 mm	1 0 0 3 - 2 4 - 4 - - - - 1 0

Monitoring contacts

Introduction

There is a difference between the three basic monitoring contact designs:

Bolt switch contacts

Bolt switch contacts are suitable for monitoring the locking status in doors. The bolt switch contact is fitted into the strike plate in the frame in such a way that it is activated by the lock bolt. The signal can be evaluated or displayed in alarm systems, building monitoring systems, control panels, and visual and acoustic alarm devices. Special strike plates are available for use in combination with electric door strikes (see Electric Strike Catalogue).

Magnetic contacts

A magnetic contact is a detector device for monitoring doors, windows or other movable parts. The magnetic contact consists of a reed contact and a permanent magnet. When the door or window is opened, the reed contact is opened as the magnet is taken away, the magnetic field altered and the signal line interrupted.

Magnetic contacts are also available in a waterproof design, such as IP 67. They are then sealed in an impact-proof plastic housing.

Adjustable door contacts

Door contacts are suitable for monitoring door and window statuses. The door contact is normally fitted into the door or window frame. When the door or window is closed, the door contact is mechanically activated and the signal can be evaluated in a monitoring system.

Bolt switch contacts



Bolt switching contact model 878

Bolt switch contacts are suitable for monitoring door locking.

Due to the rotary-mounted switch lever there are no dead bolt penetration restrictions. The slim design and the mounting screw provided enable assembly through the dead bolt cutout even in existing steel frames without striking plate. It can also be retrofitted into existing built-in frames.

Technical attributes	
Switching contact	Change-over contact
Bolt throw	nonrestricted
Class of protection	IP 54
Response path	3 mm
Connecting cable	4 m
Switching current	1,5 A
Max. switching voltage	25 V AC/DC
Feature	
Order no.	
Change-over contact, 3 wires	8 7 8 - - - - - 0 0



Dead bolt switch contact model 031309.06/031308

Bolt switch contact with adjustable switching point. Easy installation in existing steel door frames thanks to the bolt cut-out using the supplied fitting tool and drilling template.

Technical attributes	
Switching contact	Change-over contact
Bolt throw	Unlimited
VdS class	Class C
Class of protection	IP 67
Switching point	adjustible
Min. contact rating	1,50 V DC / 0,10 mA
Max. contact rating	30 V DC / 100 mA
Feature	
Order no.	
VdS G100023, 6 m connecting cable	0 3 1 3 0 9 . 0 6 - - - - 0 0
VdS G100024, with solder contact	0 3 1 3 0 8 - - - - - 0 0



Bolt Switch Contact Model 875-10 HZ

Due to the closed design of the housing, the dead bolt cutout is closed at the back as a special feature for steel frames and profiles. The profile interior is not visible. The dead bolt switch contact is first installed on the striking plate, then the striking plate is mounted onto the frame.

Technical attributes	
Switching contact	Change-over contact
Class of protection	IP 54
Response path	4 mm
Dead bolt penetration	15 mm
Connecting cable	4 m
Switching current	1,5 A
Max. switching voltage	25 V AC/DC
Feature	
Order no.	
Without striking plate	8 7 5 - 1 0 - - - - - 0 0



Dead bolt switch contact model 875-10 KL

Due to the closed design of the housing, the dead bolt cutout is closed at the back as a special feature for steel frames and profiles. The profile interior is not visible. The dead bolt switch contact is first installed on the striking plate, then the striking plate is mounted onto the frame.


Technical attributes	
Switching contact	Change-over contact
Dead bolt penetration	18 mm
Class of protection	IP 54
Response path	4 mm
Connecting cable	4 m
Colour	galvanized
Version	DIN Universal
Version striking plate	Short flat striking plate
Length	122,5 mm
Width	25 mm
Thickness	3 mm
Switching current max.	1,5 A
Max. switching voltage	25 V AC/DC
Feature	
Order no.	
With short flat striking plate	8 7 5 - 1 0 - 1 2 2 4 0 - 0 1

Mechanical contacts



Adjustable door contact (ball contact)

It is characterized particularly by its hardwearing design with steel ball and screw thread for flexible setting to a wide range of different door geometries.

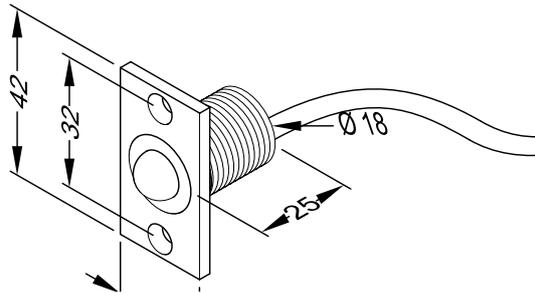


Technical attributes	
Class of protection	IP 40
Response path	1 mm
Adjustment path	13 mm
Diameter	18 mm
Type of connection	Connecting cable
Connecting cable	4 m
Number of wires	3 wire
Life span	1 M switching cycles
Max. contact rating	25 V AC/DC; 1 A
Contact type	Change-over contact

Feature	Order no.
Angular face plate	1 0 4 0 5 . 1 0 - - - - 0 0
Radius faceplate	1 0 4 0 5 . 1 0 R - - - - 0 0



Adjustable door contact (ball contact)

It is characterized particularly by its hardwearing design with steel ball and screw thread for flexible setting to a wide range of different door geometries.

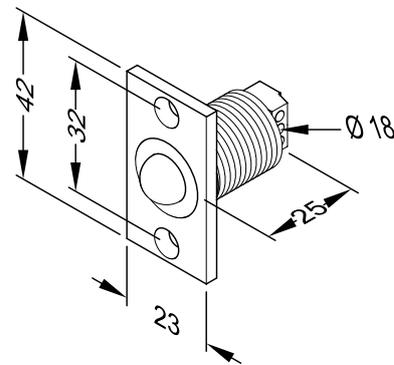

Technical attributes	
Class of protection	IP 40
Response path	1 mm
Adjustment path	13 mm
Diameter	18 mm
Type of connection	Screw terminals
Life span	1 M switching cycles
Max. contact rating	25 V AC/DC; 1 A
Contact type	Change-over contact

Feature	Order no.
Angular face plate	1 0 4 0 5 . 1 1 - - - - 0 0
Radius faceplate	1 0 4 0 5 . 1 1 R - - - - 0 0



Description of Electric Strike Model Range 118

Functional modes

Fail-locked, fail-unlocked and hold-open modes

Models **118 and 118F are fail-locked electric strikes**. This means that the electric strike can only be released or the door only opened if the strike is energised and then goes into operation. Fire and smoke control doors may only be fitted with electric strikes based on the fail-locked operating principle. See page 6 for typical areas of use.

Modell **138 is a fail-unlocked electric strike**.

This means that it can only be released or the door only opened if the electric strike is **not** energised and is thus unlocked. See page 6 for typical areas of use. Such fail-unlocked electric strikes may not be used in electric locking systems in escape doors. There are special effeff electric strikes certified and approved for such uses, such as Models 331U and 332.

Models **128 are hold-open electric strikes** based on the fail-locked operating principle. The special feature in these strikes is the hold-open pin in the centre of the electric strike latch bolt. The mechanical hold-open function only activates when there is pressure on the pin, i.e. when the door is closed. If the electric strike is energised, the electric strike holding force is

immediately released and the user may pass through the door once, even if the user opens the door a relatively long time after the strike is energised.

Models **148 are hold-open electric strikes** based on the fail-locked operating principle. The special feature in these strikes is that they do not feature the pin. The hold-open function is based on a so-called **in housing hold-open mode**.

The electric strike unlocks after a short electric impulse is emitted and remains mechanically unlocked until the door is pushed once. The hold-open without pin is activated each time that an electric impulse is emitted, regardless the door is open or closed.

Typical uses for this mode include front doors and main entrance doors where the intercom is placed at some distance from the door.

Fail-locked function

The door can only be opened while contact is given. When operated with an AC, a buzzing sound can be heard. There is no buzzing sound with DC operation.

Fail-unlocked function

The electric strike is locked for as long as the power is on. If the power is switched off, or if there is a power failure, the electric strike latch bolt can be moved and the door can be opened.

Hold-open function

The latch bolt-controlled hold-open pin in the centre of the electric strike latch (Modell 128) or in housing hold-open mode (Model 148) keeps the electric strike unlocked until the door is opened once, even after contact has been made.

Türöffner wird bestromt und entriegelt
 Türöffner bleibt entriegelt
 Tür ist 1 x begehbar
 Tür ist verriegelt

Determination of DIN swing direction





Which direction is required?

Rule of thumb:

Look at the door from the side on which the hinges are visible. This is the side towards which the door is opened.

The electric strike or strike plate DIN swing direction is used in the DIN table. In double leaf doors, the DIN swing direction of the active leaf is the one you require.

Order suffix for the DIN swing direction:

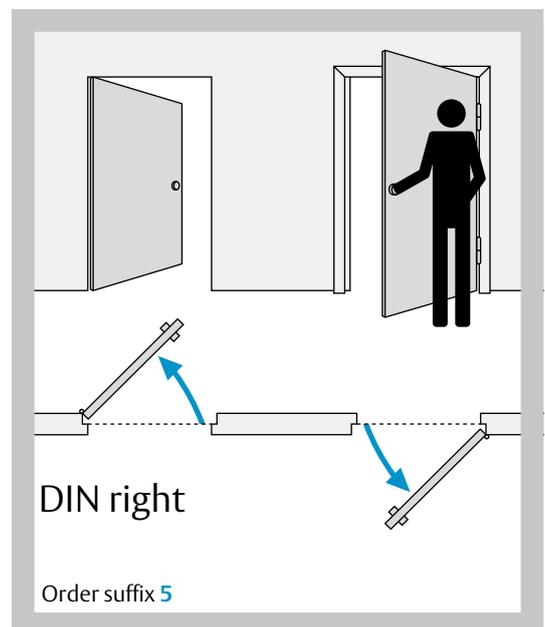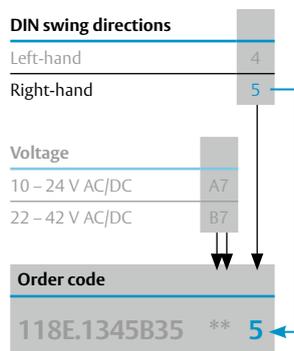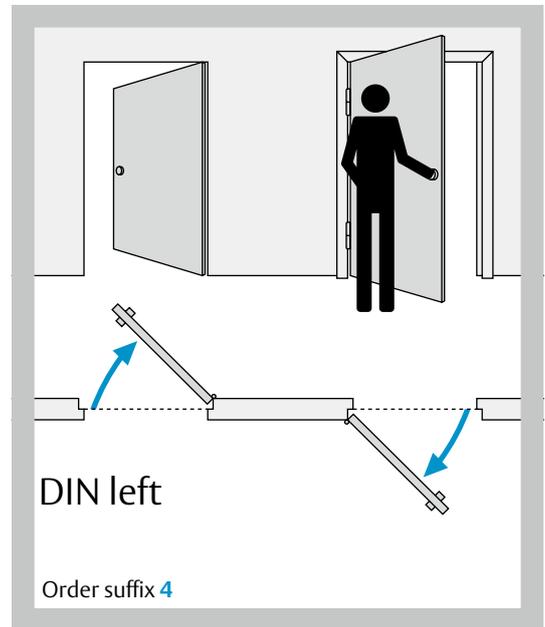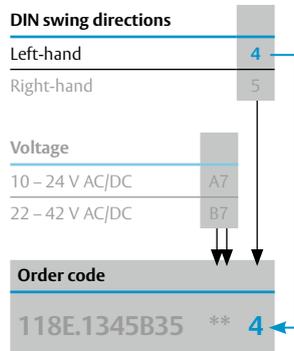

Power-on time and switch-on currents

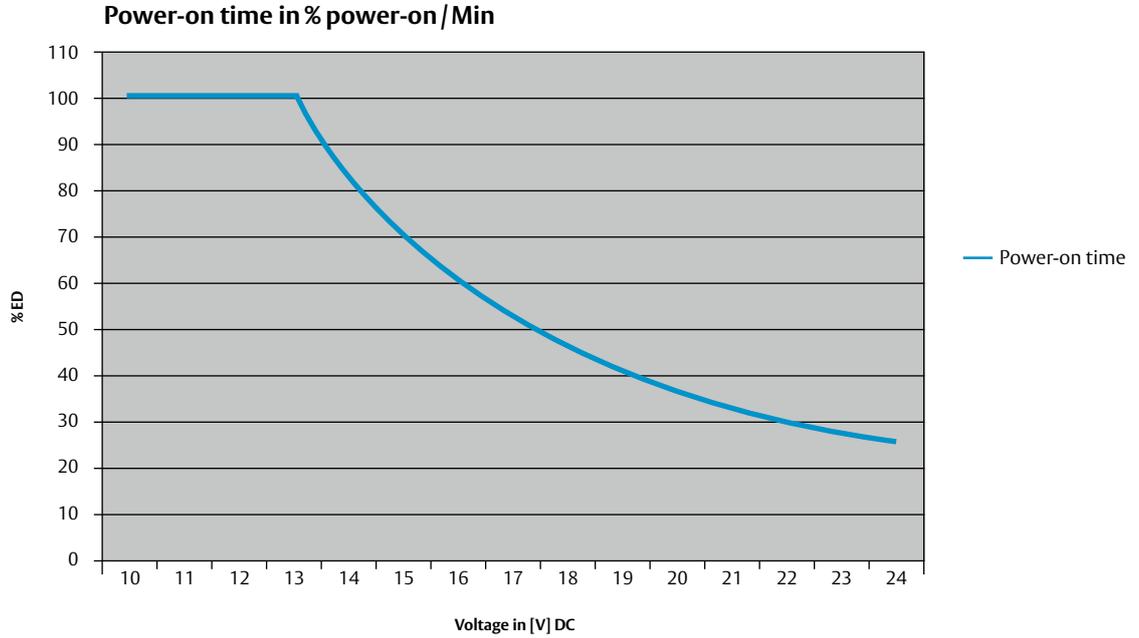



Diagram shows relative power-on time for A71 models (10-24 V AC/DC)

Example


100 % power-on time is guaranteed up to a voltage of 13 V. This means the electric strike can be continually energised without overheating.

If Electric Strike 118E-----A71 is operated at 24 V, the power-on time falls to 25 %. This corresponds to a maximum pulse frequency of 15 seconds continual energising followed

by a break of 45 seconds. The electric strike can then be energised again for 15 seconds. You can find the switch-on currents in the graph below. Alternating current (AC) operation requires lower switch-on currents than direct current (DC) operation. "DC 50 %" is a direct current with 50 % ripple.

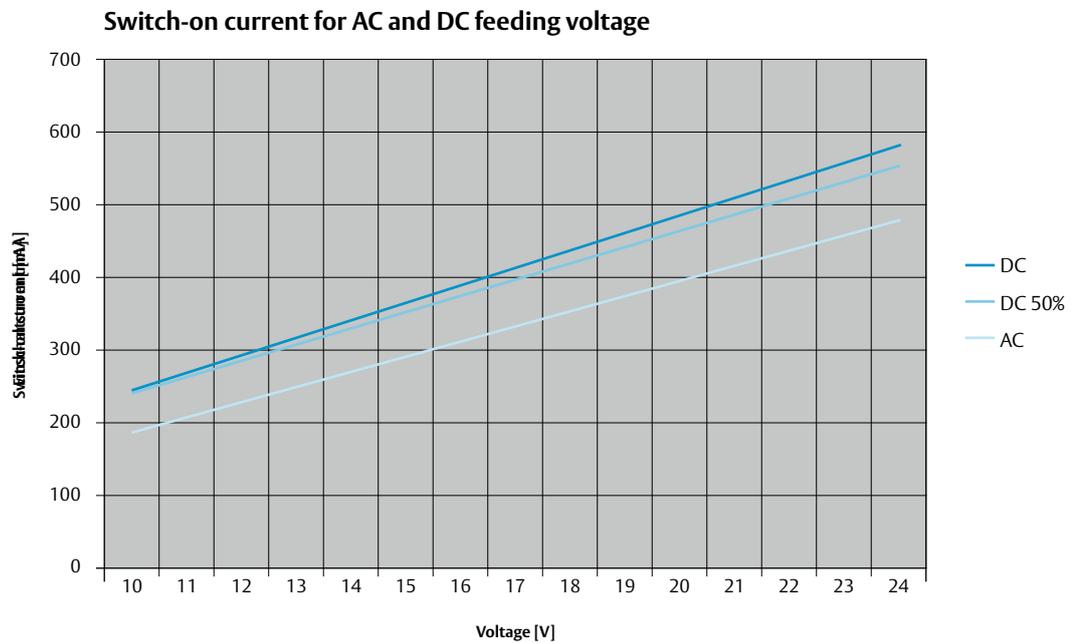

Description of the x measurement

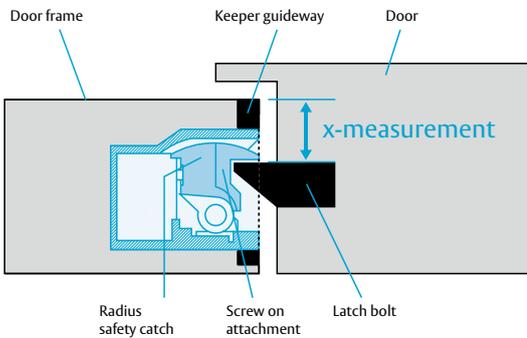

Door systems feature different rebate geometries and are fitted with locks which may also have different latch bolt thicknesses. This is why the selection of a suitable strike plate and other items depends on the so-called x measurement.

The x measurement denotes the distance between the front of the door frame and the latch bolt or electric strike keeper.

Strike plates are generally fitted flush to the door frame. If only the strike plate is taken into account, then the x measurement refers to the distance between the leading edge of the strike plate and the electric strike keeper.


Use this simple calculation formula to determine the x measurement.

$$X = P - N$$

P = Distance from strike plate leading edge to electric strike screw hole

N = Distance from electric strike screw hole to electric strike keeper (variable FaFix adjustment measurement)

You will find the value 'P' in the strike plate drawing and the N measurement in the table.

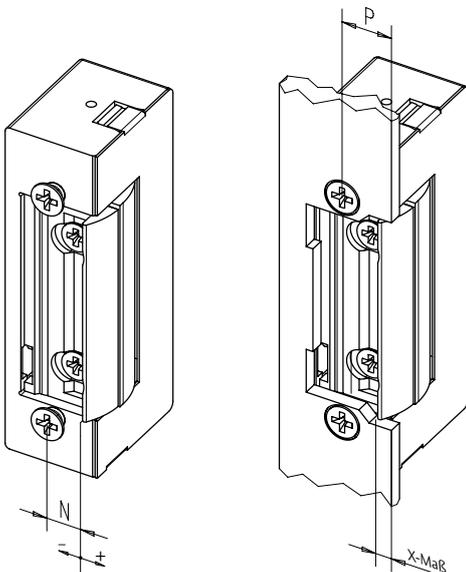

Type	N meas. mm	FaFix	N[mm] FaFix adjustment measurement	Feature
118E	8.3	- 1mm / + 2mm	7.3-8.3* - 9.3-10.3	E = with mechanical daytime unlocked mode
118F	8.3	- 1mm / + 2mm	7.3-8.3* - 9.3-10.3	F = for fire doors
118E500	7.3	- 1mm / + 2mm	6.3-7.3* - 8.3-9.3	Housing hole offset by 1mm
118F500	7.3	- 1mm / + 2mm	6.3-7.3* - 8.3-9.3	Housing hole offset by 1mm
118E.13	6.3	- 1mm / + 2mm	5.3-6.3* - 7.3-8.3	ProFix 2
118F.13	6.3	- 1mm / + 2mm	5.3-6.3* - 7.3-8.3	ProFix 2
118E.14	6.3	- 1mm / + 2mm	5.3-6.3* - 7.3-8.3	ProFix 2 for angled plate 25x10x250mm
118F.14	6.3	- 1mm / + 2mm	5.3-6.3* - 7.3-8.3	ProFix 2 for angled plate 25x10x250mm
118E340	6.8	- 1mm / + 2mm	5.8-6.8* - 7.8-8.8	Screw-on attachment minus 1.5 mm
118E343	6.8	- 1mm / + 2mm	5.8-6.8* - 7.8-8.8	Screw-on attachment minus 1.5 mm, slotted
118E103	5.3	- 1mm / + 2mm	4.3-5.3* - 6.3-7.3	Screw-on attachment minus 3mm
118E130	8.3	- 1mm / + 2mm	7.3-8.3* - 9.3-10.3	Screw-on attachment minus 3 mm, slotted
118E190	7.3	- 1mm / + 2mm	6.3-7.3* - 8.3-9.3	Screw-on attachment, brass, slotted
118E120	10.3	- 1mm / + 1mm	9.3-10.3* - 11,3	Screw-on attachment plus 2 mm
118E101	5.3	- 1mm / + 2mm	4.3-5.3* - 6.3-7.3	Screw-on attachment minus 3mm, slotted
118E540	5,8	- 1mm / + 2mm	4.8-5.8* - 6.6-7.8	Housing hole offset by 1 mm Screw-on attachment minus 1.5 mm
118E501	4.3	- 1mm / + 2mm	3,3-4.3* - 5.3-6.3	Housing hole offset by 1 mm Screw-on attachment minus 3mm
118E.15SET	6.3	- 1mm / + 2mm	5.3-6.3* - 7.3	ProFix@2, installation height of 19.1mm

Please note:

Adjustment measurements are rounded up or down.

* = Factory settings

Descriptions of ProFix®

Model Range 118 Electric Strikes are also available in a so-called ProFix® 2 design. ProFix® 2 – a further developed version of ProFix® 1 – combines FaFix and a latch bolt guide in a single component. The ProFix® 2 latch bolt guide becomes an integrated part of the electric strike, rather than the strike plate.

Advantage:

- ProFix® 2 Flat Strike Plates are generally non-handed and can thus be used in DIN left- and DIN right-hand doors. This makes selecting strike plates easier and reduces the number of versions and storage requirements.

ProFix® 2 Electric Strikes in the 118 and 118F Model Ranges feature the same, symmetric design.

Advantages:

- These electric strikes are non-handed and can thus be used in DIN left- and DIN right-hand doors. This makes selecting strike plates easier and reduces the stock level.
- All electric strikes in the 118 ProFix® 2 Model Range are essentially compatible with ProFix® 2 Strike Plates
- Cut-outs for electric strikes can thus be standardised, irrespective of whether the doors are subject to fire safety and smoke control requirements or not.
- The seal layer between the door leaf and frame is not interrupted.

This offers several advantages:

- More visually appealing; improves the overall appearance of a door
- Less time and effort for cut-outs when preparing the frame
- Improved noise insulation value possible
- More impervious to smoke
- Improved cold and heat insulation (Passive and low-energy houses)
- Greater protection against vandalism, as ProFix® 2 Electric strikes are 'invisible' when the door is closed.

1 Before

effeff Model 17 with interrupted, cut-out seal layer in the aluminium profile.

2 Now

ProFix 2 Model 118E.13 with Strike Plate no. 26B with closed seal layer in the aluminium profile.



Classification key as per DIN EN 14846:2008-11

* According to the Gazette of the European Union, the co-existence period with EN 14846 : 2008 ends on 1.9.2012.

DIN EN 14846* is applicable to electro-mechanical locks and strike plates. Electro-mechanical strike plates include electric strikes.

Section 3 of DIN EN 14846 defines the different terms. In Section 3.2 you will find:

Electro-mechanical strike plate (or electric strike)

Component which is fastened to the frame and which activates a locking and/or unlocking action by electrically operated means.


Electro-mechanically operated electric strikes must be classified according to a nine-digit classification system in compliance with the aforementioned DIN standard.

This nine-digit classification key is divided into:

1. Use category
2. Proof of durability and mechanical load on the latch
3. Door mass and locking force
4. Suitability for use with fire and smoke control doors
5. Security
6. Resistance to corrosion, temperature and humidity
7. Protective effect and drilling resistance
8. Protective effect with regard to electrical mode of operation
9. Protective effect with regard to electrical tampering

All electric strikes in the Model Range 118 are tested in the factory in compliance with DIN EN 14846:2008.11.

Example

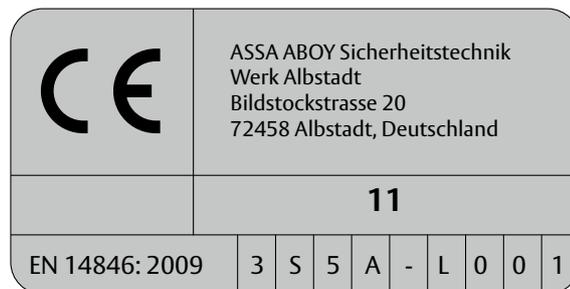

Electric strike range	Classification key as per DIN EN 14846:2008-11									Type of current	
	1	2	3	4	5	6	7	8	9	AC	DC
118 F	3	S	2	E	-	L	0	0	1		X
118 F	3	X	2	E	-	L	0	0	1	X	
118	3	S	5	0	-	L	0	0	1		X
118	3	X	5	0	-	L	0	0	1	X	

Certificates

Certified security

You can find tests certificates and EC declarations of conformity online in our support section at www.assaabloy.de.



MPA NRW
Materialprüfungsamt Nordrhein-Westfalen
PRÜFEN · ÜBERWACHEN · ZERTIFIZIEREN

Marsbruchstraße 186 • 44287 Dortmund • Postfach: 44285 Dortmund • Telefon (0231) 4502-0 • Telefax (0231) 45 85 49 • E-Mail: info@mpanrw.de

Allgemeines bauaufsichtliches Prüfzeugnis

Prüfzeugnis-Nummer: **P-120003624**

Gegenstand: **„Elektrische Türöffner nach dem Arbeitsstromprinzip für Feuerschutz- und Rauchschutztüren“**
Ausführungen entsprechend der Zusammenstellung in der Anlage 2.

Verwendungszweck: **Mechatronisches Schließblech für Drehflügeltüren zur elektrisch gesteuerten Öffnung geschlossener, nicht verriegelter Türen.**

Antragsteller: **ASSA ABLOY Sicherheitstechnik GmbH**
Bildstockstr. 20
D-72458 Albstadt

Ausstellungsdatum: **5. August 2010**

Geltungsdauer bis: **5. August 2015**

Aufgrund dieses allgemeinen bauaufsichtlichen Prüfzeugnisses ist der obengenannte Gegenstand nach den Landesbauordnungen verwendbar.

Dieses allgemeine bauaufsichtliche Prüfzeugnis umfasst 7 Seiten und 2 Anlagen.
Dieses Prüfzeugnis ersetzt das allg. bauaufsichtliche Prüfzeugnis Nr. P-12 0389 0 96.

Maintenance and care instructions

You must comply with the following maintenance and care instructions to ensure that the product can function reliably without any problems.



Check voltage!



The warranty is voided in the case of improper handling or use.



Filing and grinding swarf become magnetic and jam the electric strike keeper.



When applying a finishing coat, you must not coat the electric strike latch keeper with paint or any other type of finish.



effeff electric strikes feature permanent lubrication. Inner parts of electric strikes must not be lubricated. The running surfaces of lock or electric strike latch need to be lubricated a little on a regular basis where the latch or electric strike latch comes into contact with other surfaces.



When installing near to the ground (minimum height of 100 mm), ensure that no dirt or dirty water can come into contact with the electric strike.

You can find other FAQs online in our support section at:
<http://www.planerportal.de/service/support-cd/Support/data/faq/faq.html>

Here are some of the FAQs:

What do the numbers 1.10 or 01.10 mean on the nameplate of an effeff product?

These numbers indicate the production date. In the case of nameplates with barcodes, the number before the point refers to the month and the number after the point refers to the year; for example, 01.10 corresponds to January 2010. In the case of nameplates without barcodes, the first number refers to the quarter and the second the year. In our example, 1.10 refers to the 1st quarter of 2010.

A fail-locked electric strike does not unlock when operated with an alternative current. How can I make it work?


As basic rule, the pre-load values in electric strikes are lower when operated with a direct current than with an alternative current. The FaFix adjustment setting allows you to reduce the pressure on the latch bolt, thus making it easier to unlock. If this is not enough, we recommend using effeff Pre-Load Electronic Assembly 760-12. This enables the system to handle pre-loads up to 300 N using a direct current.

Which electric strike is locked in the event of a power failure?

Electric strikes with fail-locked operation (1st types, such as Models 118, 116, 16W, 142U and 143) are locked in the event of a power failure. The door can only be opened when the electric strike is energised. When electric strikes are operated with an alternating current, the typical buzzing sound can be heard. There is no buzzing sound with direct current operation. Electric strikes are designed for momentary contact, such as when the electric strike is released by pressing a button.

Which electric strike features an electric impulse which keeps the door unlocked until the door is opened?

Electric strikes with a hold-open function (2nd types, such as Models 26W, 27, 128, 148 and 126). The hold-open pin in the centre of the electric strike latch bolt is pressed when the strike is energised and when the door is closed. The electric strike remains unlocked until the hold-open pin is withdrawn when the door is opened.




How can I determine the difference between DIN left and right?

Rule of thumb for DIN table: Look at the door from the side on which the hinges are visible. This is the side towards which the door is opened.

- 1) Door hinges on the left = DIN left
- 2) Door hinges on the right = DIN right

The DIN swing direction is usually required for angled strike plates.



Entrance doors to doctor and lawyer practices should not be left open, but they can be opened automatically by pressing the bell push during visiting hours.

Such a system can be installed by using Automatic Electric Strike Control Unit Model 750. The visitor rings the door bell, thus releasing the electric strike after a short delay if the automatic system is switched on. You can adjust both the delay period before the electric strike is released and the time that the electric strike is energised. If the control unit is switched off, the electric strike functions as normal.

How can I switch a door to permanently open using a time switch or normal switch?

The order suffix eE indicates electric strikes which can be permanently energised. A direct current is used to eliminate the typical buzzing sound that an electric strike makes when opening. If intercom mode with a buzzing sound is to be combined with noise-free permanently unlocked mode, you can use Switchover Device Model 7410-10.

This is available in 8 V eE, 12 V eE and 24 V eE versions.

Which electric strikes may be used in fire doors?

Test certificates issued by the MPA NRW testing centre are available for Model Ranges 131, 142U, 143 and 118F. These electric strikes may only be installed when the fire door is being manufactured. If retrofitted, they are no longer valid as an approved fire-rated system. Please observe the German Institute for Building Technology's notifications.

Which electric strikes may be used in smoke control doors?

Electric strikes in our 118S and 111U ranges. These ranges are approved by the MPA for use in smoke control doors.

Which electric strikes can be used with an access control unit?

When using electronic devices such as door code units, electronics need to be protected against interference pulses. We therefore recommend using electric strikes with an integrated diode. These electric strikes are generally indicated with the number '05'. Electric strikes with a suppressor diode can be operated using either an alternative or direct current. Electric strikes with a recovery diode must only be operated using a direct current. It is recommended to use electric strikes with monitoring contacts (RR) to ensure that strikes are full functional and reliable when connected to an access control unit.

Which order suffix must I use when I require an electric strike with a lever for unlocking the door mechanically?

The order suffix eE indicates electric strikes which have a permanently unlocked function. This additional feature is only available for fail-locked electric strikes with the exception of security door electric strikes. An adjusting screw is used instead of a unlocking lever in waterproof electric strikes or swing door electric strikes. If the door is also fitted with a door closer, this prevents the door from staying open when pushed open due to wind pressure or differences in air pressure.

Which electric strikes allow operators to overview the door position?

Electric strikes with the suffix RR in their model identification code feature an integrated changeover contact which detects when the latch bolt is engaged, thus establishing whether it is 'open' or 'closed'. The contact is potential-free and can resist a switching voltage up to 25 V and a switching current of 1 A.

**An entrance door needs to be released in the event of a power failure.
Which electric strike can be used in such a case?**

Electric strikes with fail-unlocked operation (3rd types, such as Models 36W, 37, 342, 343 and 138) are unlocked in the event of a power failure. The electric strike must be energised to lock the door. If the electric current is switched off or interrupted due to a power failure, the electric strike is unlocked. Only direct current operation is possible due to technical reasons. Please note that we offer a special electric strike range for doors on rescue routes.

What causes the buzzing noise in an electric strike and how can this noise be switched off?

All fail-locked electric strikes produce the typical buzzing noise when energised by an alternative current. This buzzing is generally welcome because it acts as a signal to indicate that the electric strike is working. The volume is at its loudest in the lower reaches of the permissible rated voltage range. Such a buzzing noise may cause a nuisance, depending on the respective structural conditions. The level of noise can only be mitigated at its point of origin to a certain extent. In metal frame profile doors, for example, noise can be reduced by filling the profile hollows with foam. It also helps to activate the electric strike with a direct current, which does not produce a signal and any pre-load in the latch may affect the opening function.

The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

ASSA ABLOY
Opening Solutions

ASSA ABLOY
Sicherheitstechnik GmbH
Bildstockstraße 20
72458 Albstadt
GERMANY
Tel. +49 7431 123-700
Fax +49 7431 123 258
albstadt@assaabloy.com
www.assaabloyopeningsolutions.de